




PNEUMAX

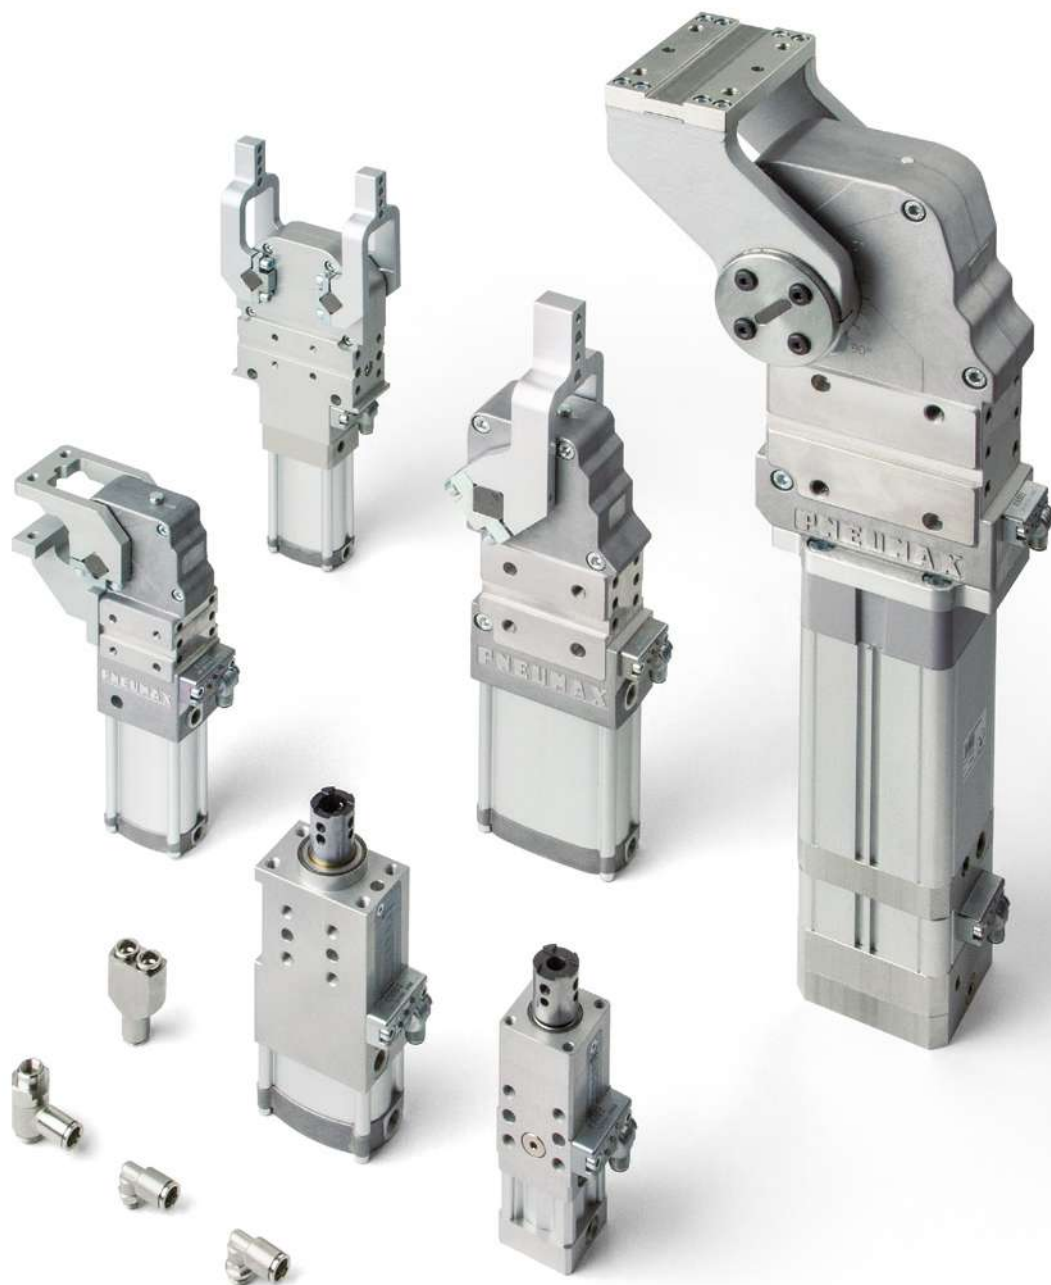

AUTOMOTIVE PNEUMATIC DEVICES

CATALOGUE

Automotive Catalogue

The ultimate clamping technology

Innovation begins with Research and Development and extends to industrial processes and business activities, with the ultimate aim of total customer satisfaction.





PNEUMAX AUTOMOTIVE

Pneumax Automotive is a business unit of Pneumax Spa. The Italian company was founded in 1976 and today is at the head of Pneumax Group, one of the main players in the industrial and process automation industry worldwide. The Pneumax Automotive BU offers a complete range of products dedicated to the production lines of the industry, with a special focus on **Body in White applications**.

The Pneumax range includes **clamping units, pin packages, gripper units, power pivots** and complete multi axes positioning systems developed to guarantee maximum reliability and the highest accuracy and repeatability.

Each product series integrates extremely **innovative technical solutions**, without compromising on compliance with the various international mounting standards. Special attention was placed in energy efficiency, with devices that allow the highest savings offered on the market. Pneumax's extensive network across the globe allows optimal and coordinated management of projects with automotive companies internationally. Every stage of production and product testing is carried out in our specially equipped departments in the Italian headquarters located in Lurano (BG) to ensure maximum reliability and the highest quality standards.

Safety & green Automation

- Operator and equipment safety
- Flexibility and reduction of setup times
- Connectivity
- Energy savings
- Standardisation



Pneumax Group

- Headquarters
- Companies
- Distributors

**PNEUMAX
Headquarters**



INDUSTRIAL
AUTOMATION



PROCESS
AUTOMATION



AUTOMOTIVE

10


Production
units

26

Companies

850

Collaborators



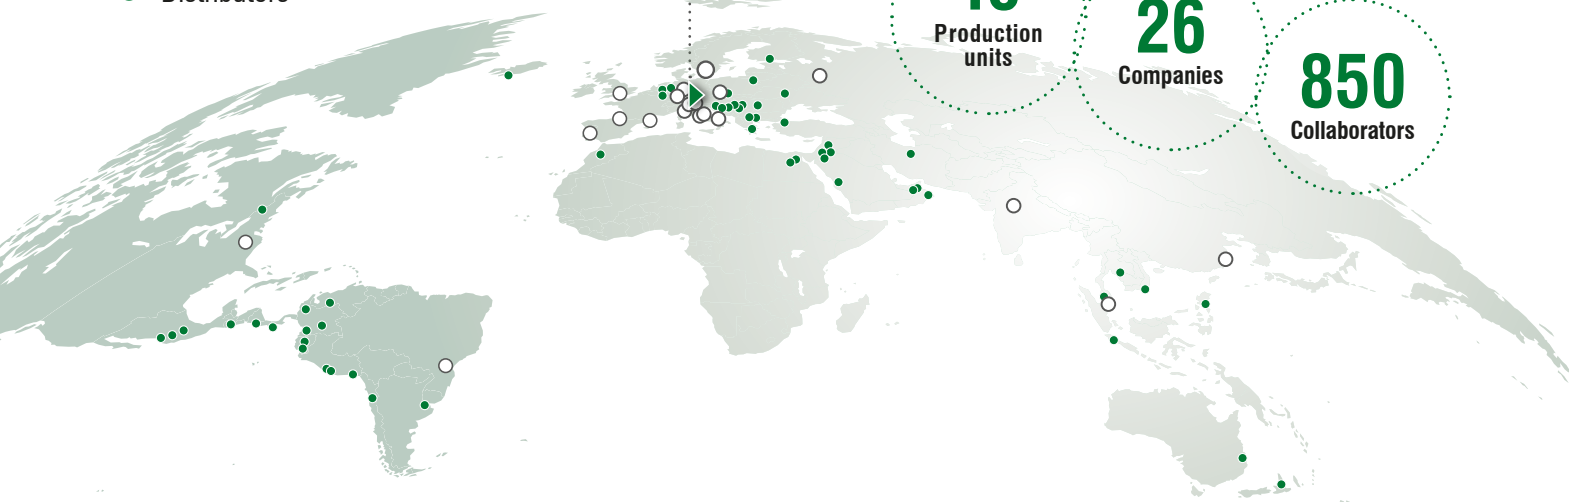


A WIDE RANGE OF SOLUTIONS

In order to face the current challenges in BIW production lines, **Pneumax's product range is constantly evolving, with a specific focus on sustainability, flexibility of the control systems and energy efficiency.**

Today, in addition to the consolidated range of pneumatic solutions, Pneumax further expands its offer by introducing E-Range, a new line of **electrical devices.**

Thanks to the experience gained in the industrial automation sector and a constant commitment to innovation, the company establishes itself as a reference point not only in pneumatics, but also in electrical integration, offering advanced and high-performance solutions to meet the needs of a constantly evolving market.

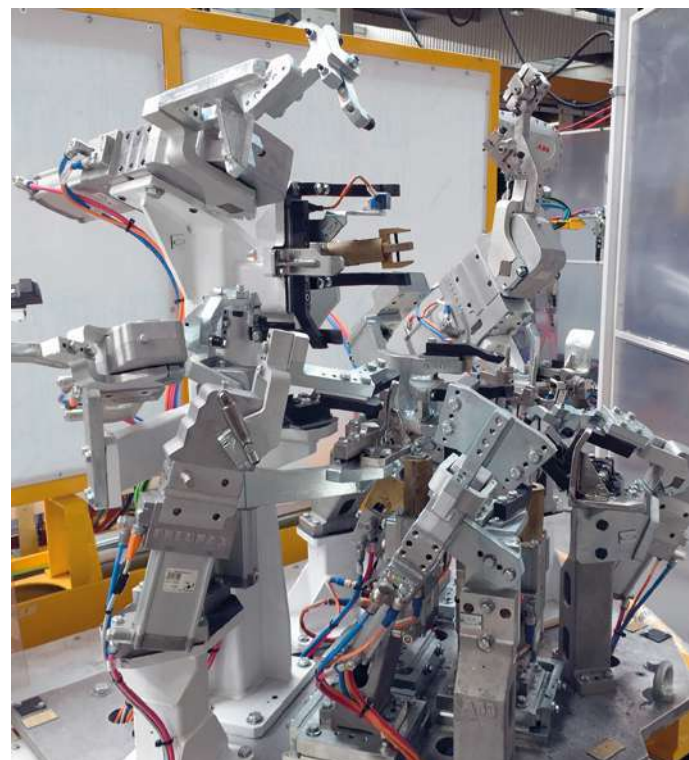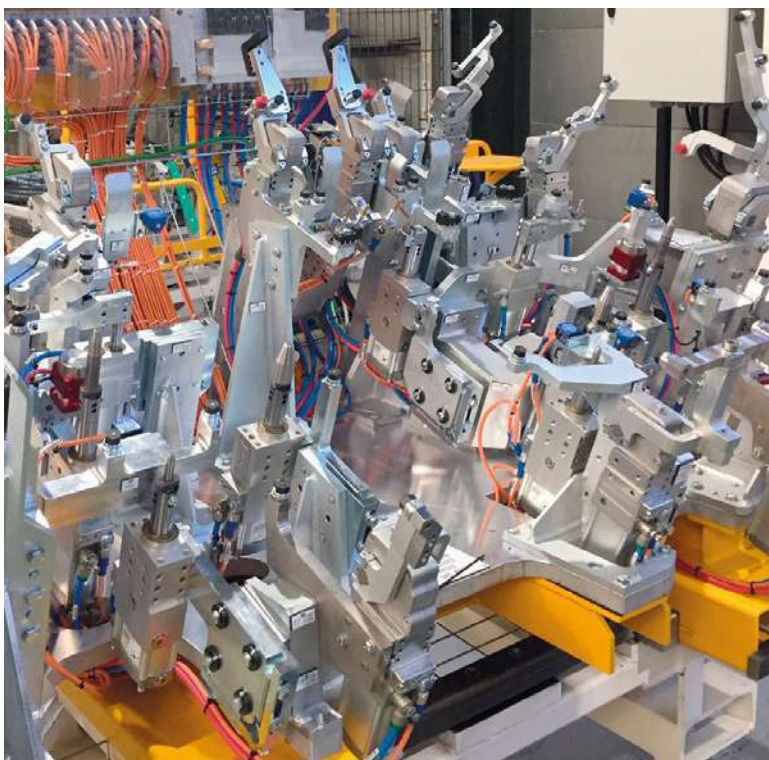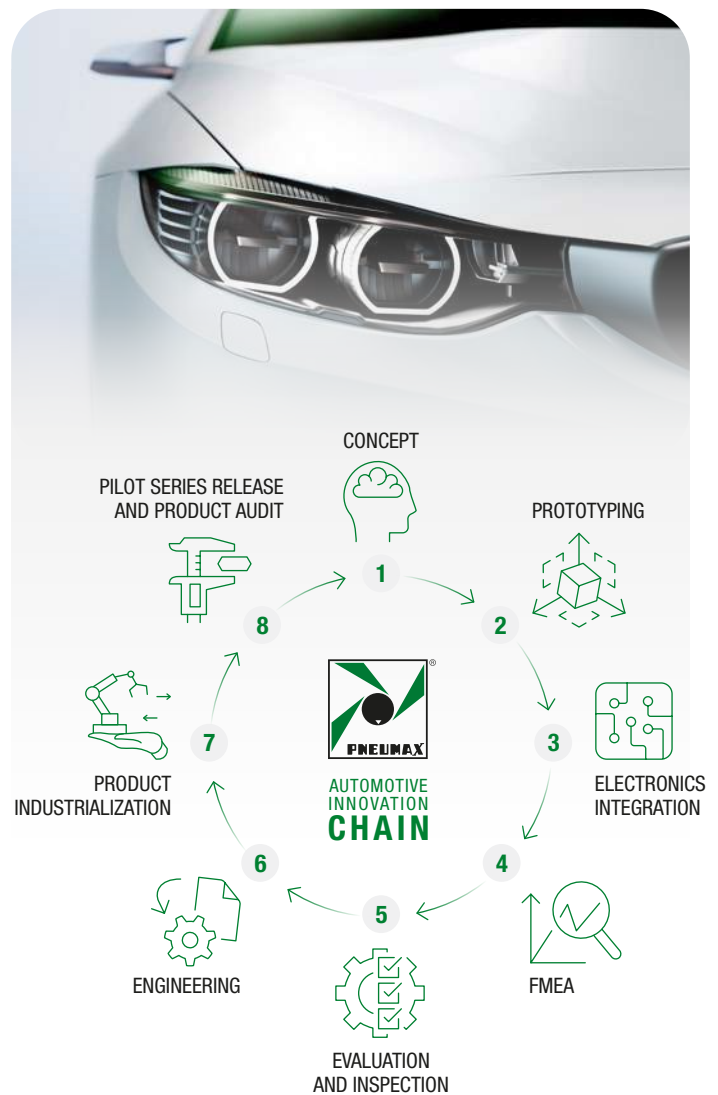

Product range

Automotive series

Our clamping series features the widest range in clamping moment & stepless adjustable opening in the industry.

Extensive Product Range covering **Clamping, Locating, Handling, Pivoting** functions, with all options required in the **BIW** production lines.

Clamping




C1P25 	C1P32 	C1P40 	C1P45 	C1P50 	C1P63 	C1P80 	C1D25 	C5D32 	C1D40
C1D50 	C1D63 	C1D80 	C5M32 	C1M50 	C1M63 	C2P40 NAAMS	C2P50 NAAMS	C2P63 NAAMS	C2P80 NAAMS
C2D40 NAAMS	C2D50 NAAMS	C2D63 NAAMS	C2D80 NAAMS	C3P40 	C3P50 	C3P63 	C4P50 	C4P63 	HE1P0
HE1P1 	HE1P2 	HE1P3 	HE1P4 	HE1P5 	HE1P6 	HE2P1 NAAMS	HE2P2 NAAMS	HE2P3 NAAMS	HE4P1 NAAMS
HE4P2 NAAMS	HE4P3 NAAMS	C1X40 	C1X50 	C1X63 	C2X50 NAAMS	C2X63 NAAMS	ADWI14 	ADWI18 	
CS/HES 	CN 	CB40 	CB63 	CL25 	HC1 				

Special Clamping products:


Sealed > Product Series+S

Example: C1S..., C2S..., HE1S..., HE2S...


Locating

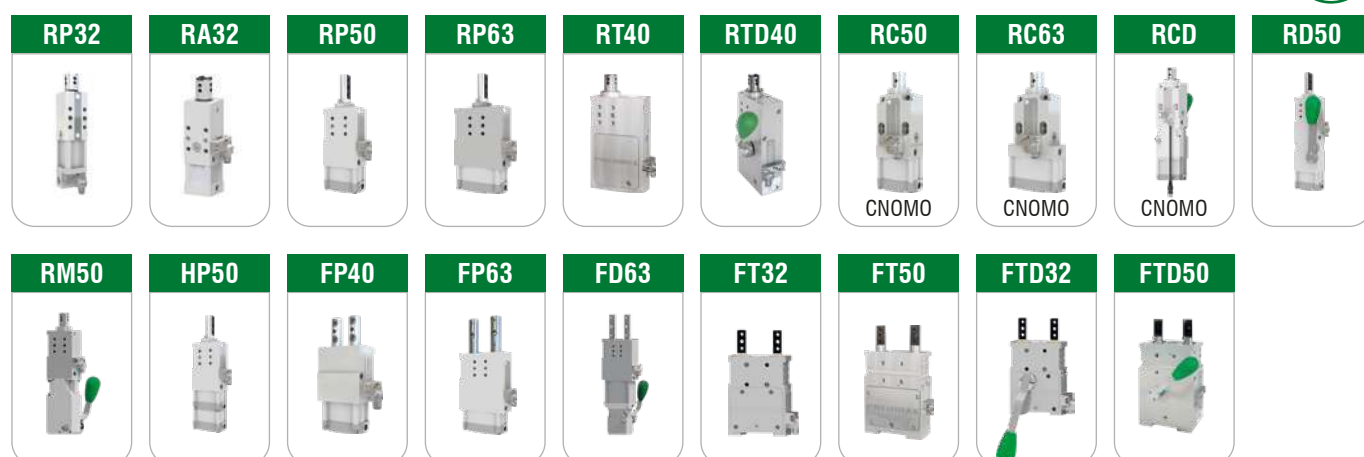


Handling




Pivoting

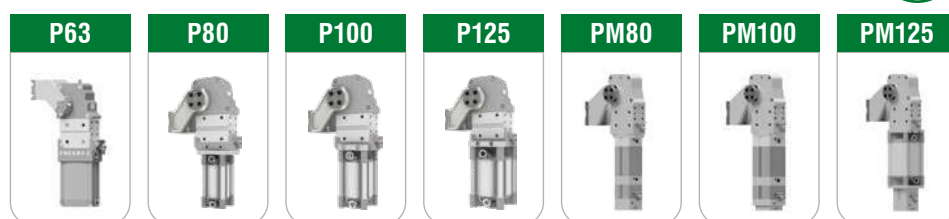


Actuation

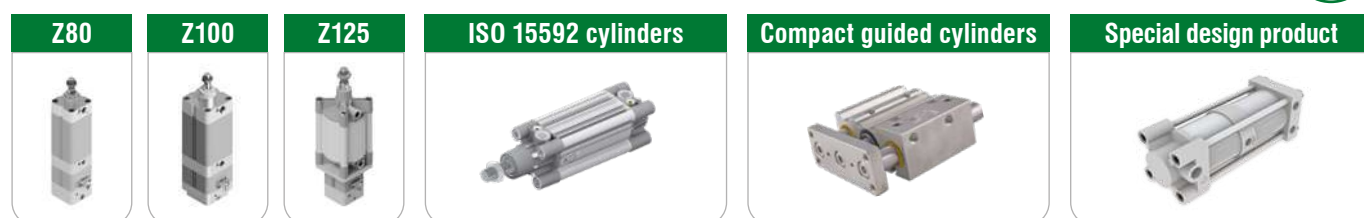


Complementary products

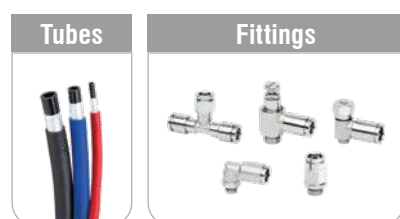

Accessories

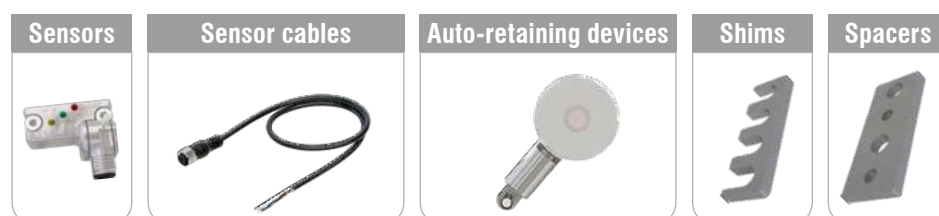

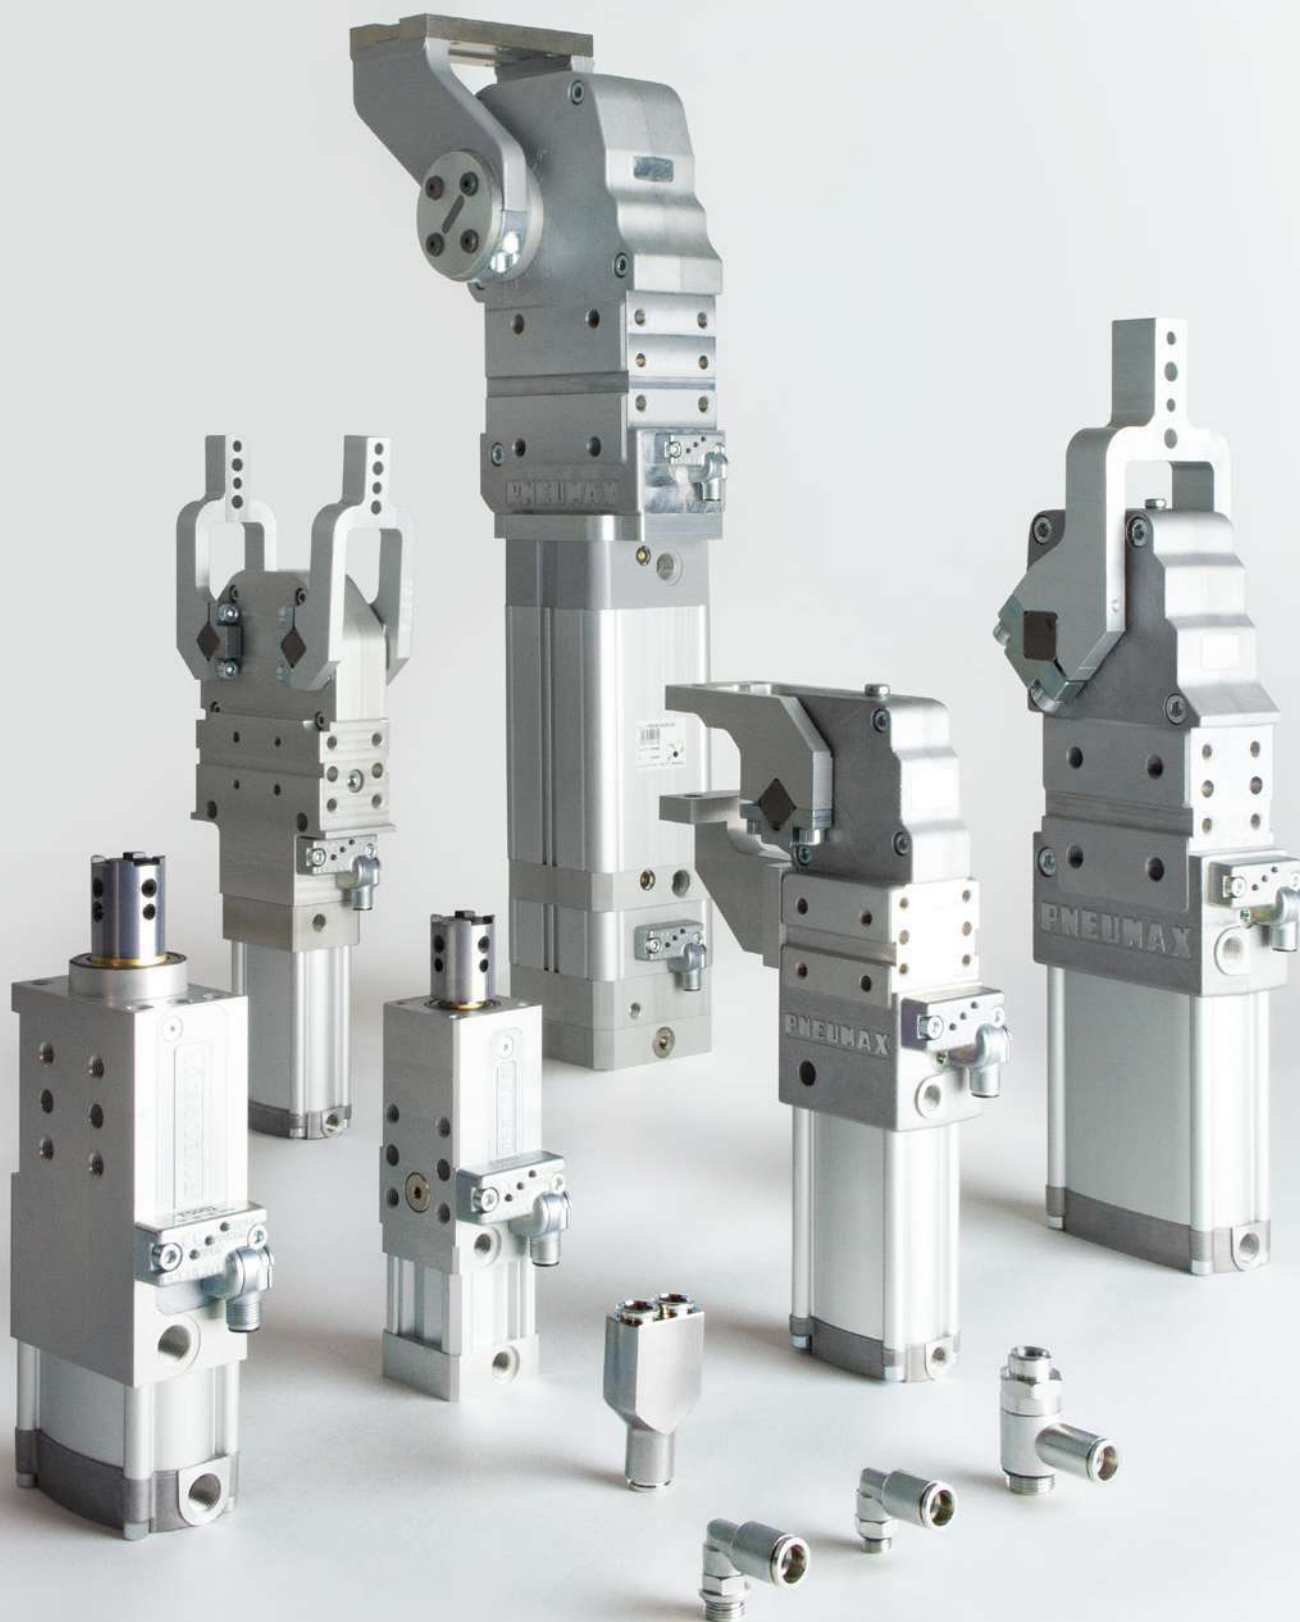

Index

Automotive series

CLAMPING	08
C1-Series – International mount	10
C2-Series – NAAMS Standard	38
C3 and C4-Series – New integrated hold open device	51
HE1-Series – International mount	58
HE2-Series – NAAMS Standard	70
HE4-Series – NAAMS Standard	80
CX-Series – International and NAAMS mount	91
CS/HES-Series – Sealed clamps International and NAAMS mount	97
CN-Series – Sealed clamps with nickel-plated linkage	98
CB-Series – Double arm clamps	99
CL-Series – Pneumatic clamp	105
HC-Series – Hydraulic clamps	108
LOCATING	113
R-Series	116
RT-Series	136
RC-Series	142
HP-Series	148
F-Series	152
FT-Series	158
HANDLING	168
J-Series	170
PIVOTING	174
P-Series	177
PM-Series	186
ACTUATION	194
Z-Series	195
1390-Series – ISO 15552 cylinders with rodscrapers	208
6110-Series – Compact guided cylinders	210
Special design products	213
COMPLEMENTARY PRODUCTS	214
Tubes	215
Fittings	216
ACCESSORIES	240
Sensor	241
Cable	243
AR-Series	244
Auto-retaining devices	251
Shims and Spacers	252
ATEX	254
COMPONENTS FOR THE AUTOMOTIVE INDUSTRY	258

Clamping

Stepless adjustment of the opening angle with the quickest set-up time in the market.



The lightest and most compact



Patented

The lightest and most compact

An internal hard stop and a rigid linkage secure **a precise and backlash-free positioning thus enhancing the repeatability of the closed position.**



The toggle mechanism is fully encapsulated within the lightweight aluminum body construction.

Superior needle roller bearings with joints for high load capacity and protection. Protection against any contamination of weld spatter, welding debris and coolants enabling clamps to operate continuously in extreme environments.

**3 MLN
CYCLES**


Maximum structural resistance and fatigue strength.

AR system to maintain the load in the open position without air supply.

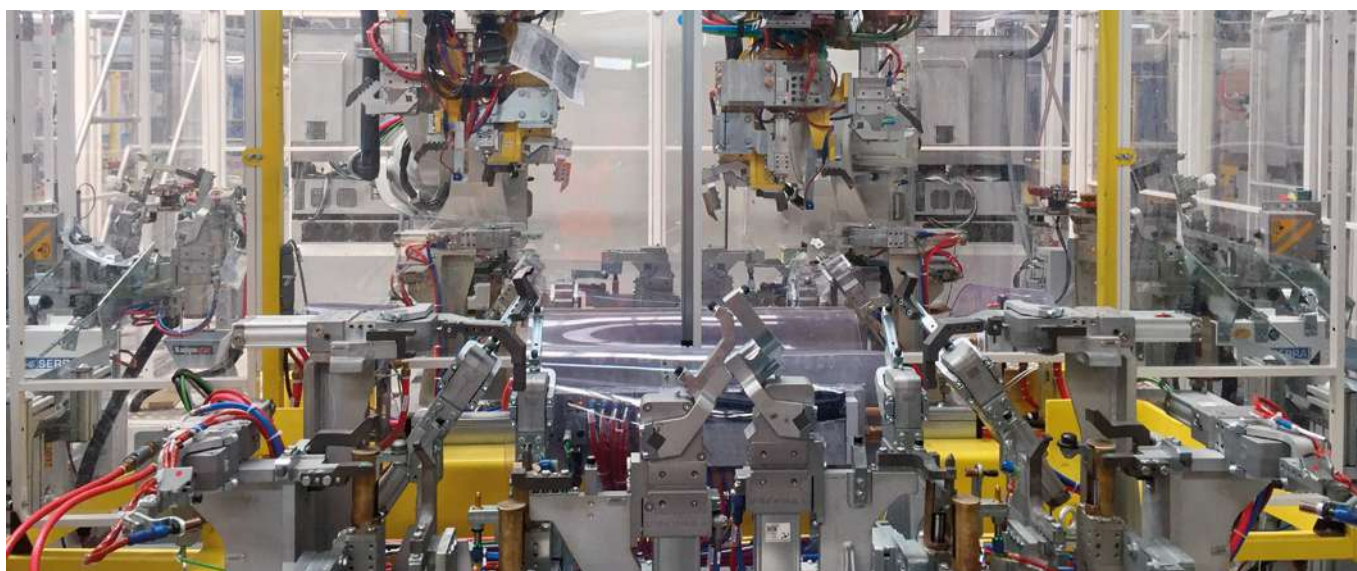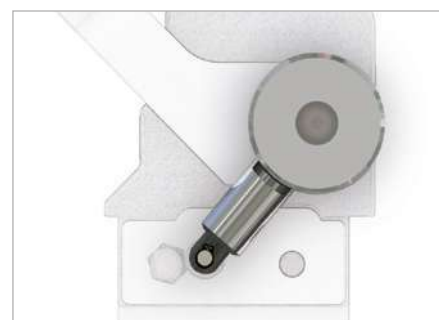

Stepless opening angle adjustment

Easily accessible and simple field adjustment from the rear or front side of the device, with an Allen wrench or a screw gun. A built-in, single-touch opening adjustment, with external access through a recessed detent: no disassembly is ever required.

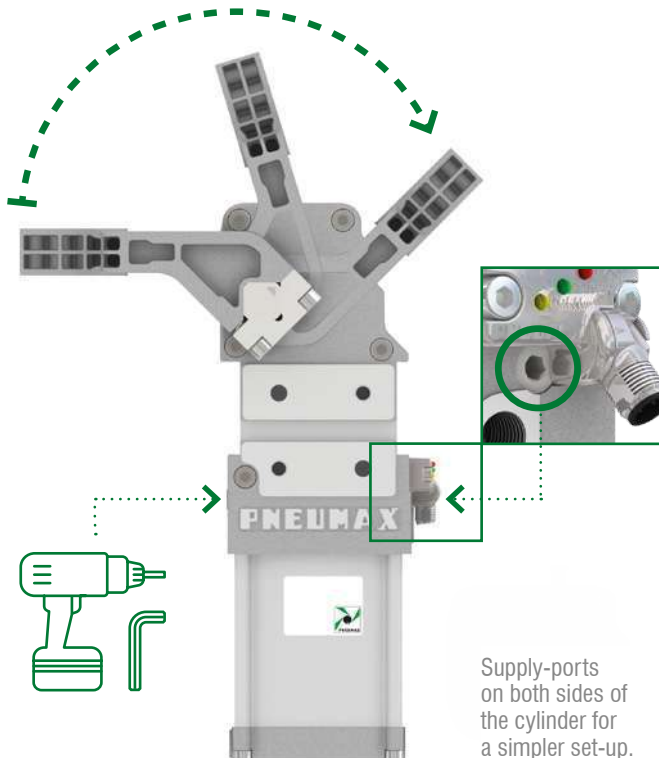


Reliable opening adjustment

The opening position is repeatable thanks to an **anti-rotation device** integrated in the piston. The arm selection remains secure. A **retain mechanism** secures the adjustment tool in its seat and prevents the Allen wrench to fall down during the adjustment procedure.

Electronic sensor

One only sensor is used for all products, all sizes and series. EMC compliance to EN 60947-5-2:2007 + A1:2012. Swivel connector 0°-90°

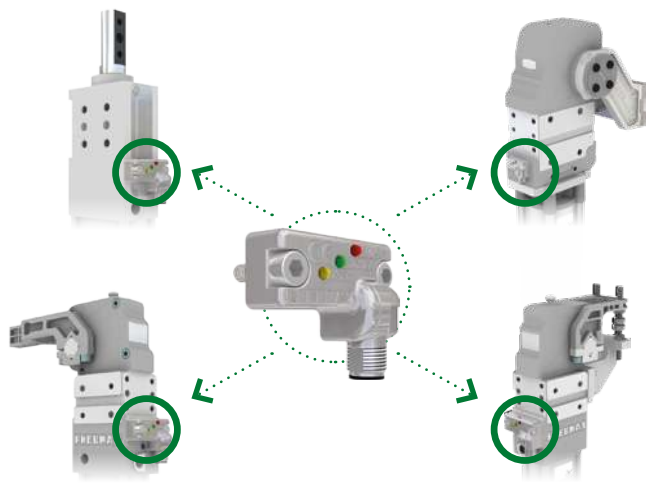

Efficient cushioning system


- **Shorter cycle time**
- **Longer lifetime**
- **Less noise**
- **Less abrupt movements**
no slamming - no shocks
- **Less impact forces generated**
by dynamic stress factor




Robust & versatile hand lever

Dual shaft output

Sturdy & durable solution with extremely compact and flat dimensions. The integrated manual operation guarantees that the toggle joint is engaged and requires a very low force to reach the irreversible condition.

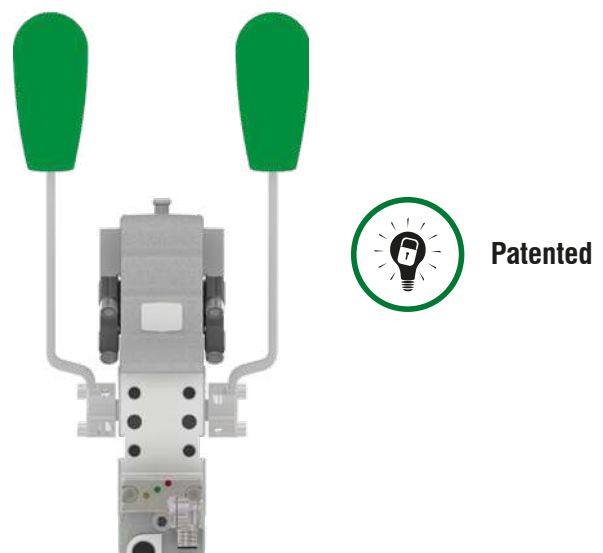

Optimal clamping arm-shaft connection and arm structure



C1-Series

Pneumatic and manual power clamps International mount

INTERNATIONAL
MOUNT



Pneumax clamps' series have all been developed with a modern and compact design which goes towards **enhancing the operational performances**, such as the cycle time, combined with a very limited total weight without compromising their **strength** and **resistance**. Thanks to the material chosen for the housings and the clamping arms, a high quality aluminum alloy, as well as due to the compact design of the cylinder and the housings, to minimize any interfering contours, Pneumax devices are **the lightest and most compact power clamps in the market**.

Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features


Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 25 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

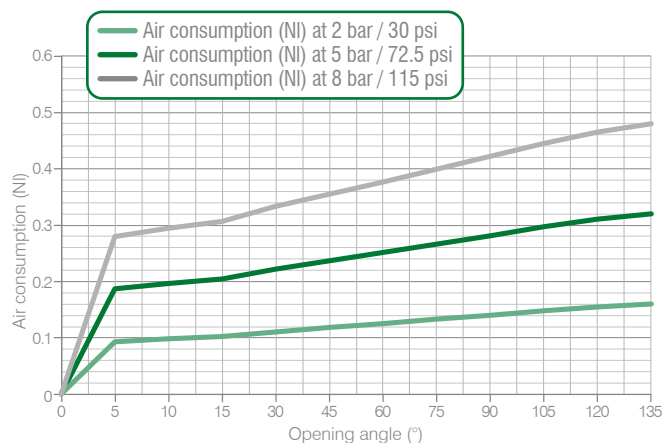

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 18/11/2016

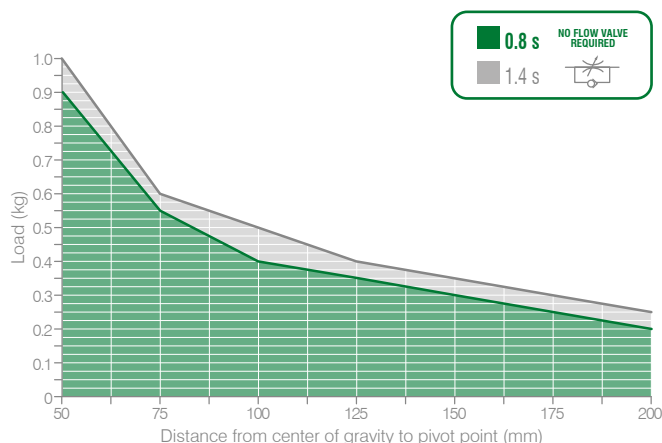

• **Clamping moment (at 5 bar / 72.5 psi)**
50 N m / 36,87 lb-ft

• **Holding moment**
75 N m / 55,31 lb-ft


• **Cycle time for max opening angle**
< 0.8 s

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

Size 32 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

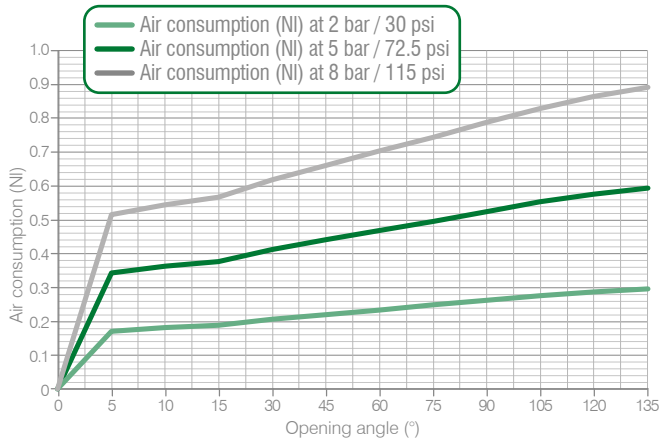

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 18/11/2016

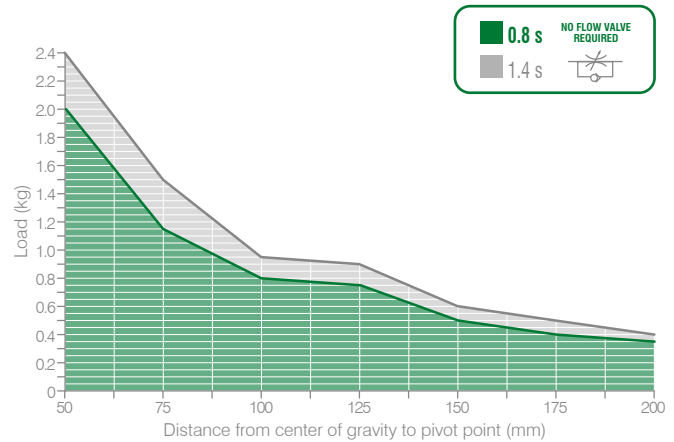

- **Clamping moment (at 5 bar / 72.5 psi)**
75 N m / 55,31 lb-ft

- **Holding moment**
250 N m / 184,39 lb-ft


- **Cycle time for max opening angle**
< 0.8 s

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

Size 40 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

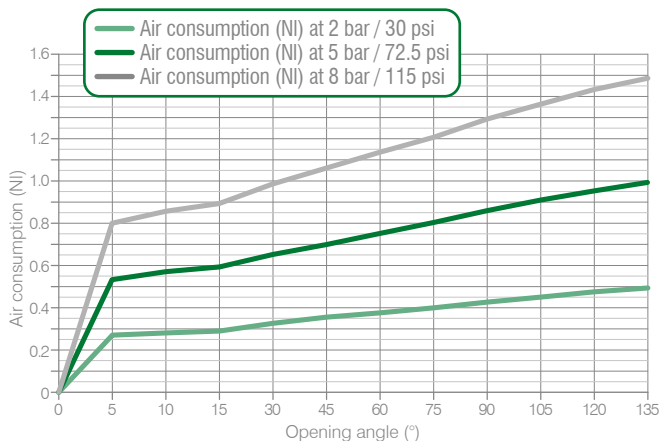

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

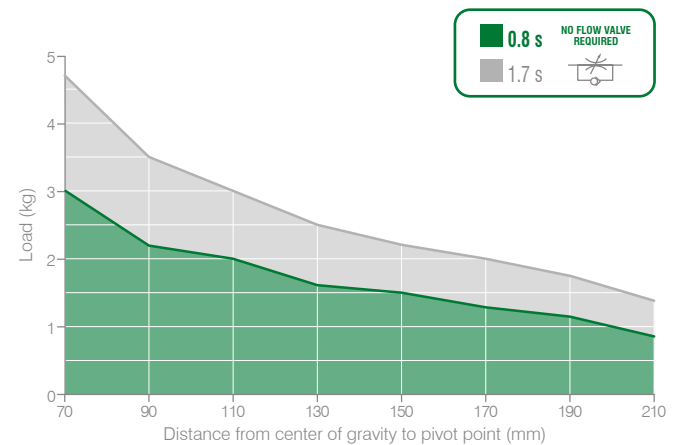

- **Clamping moment (at 5 bar / 72.5 psi)**
130 N m / 95,88 lb-ft

- **Holding moment**
380 N m / 280,27 lb-ft


The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

C1-Series / Functional charts (continued)

Series 45 - size 40 interchangeable to size 50 and 63 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 16/06/2015

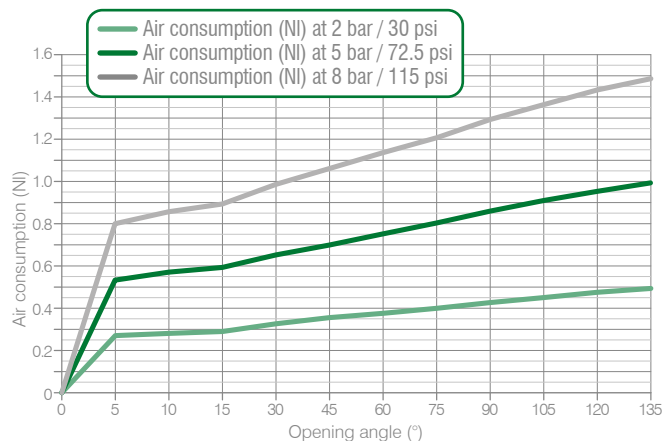

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 16/06/2015

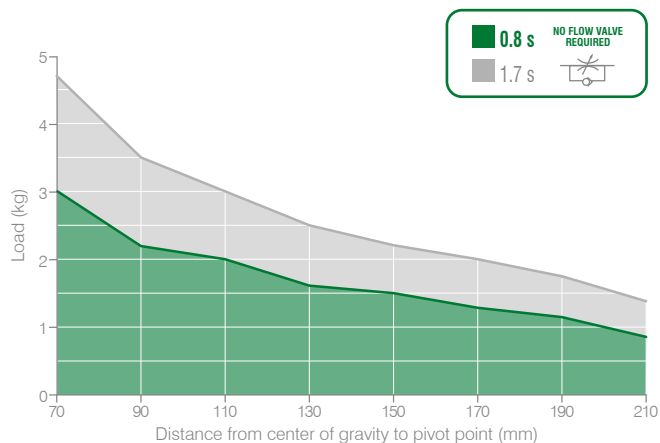

• Clamping moment (at 5 bar / 72.5 psi)

130 N m / 95,88 lb·ft

• Holding moment


380 N m / 280,25 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

Size 50 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 16/06/2015

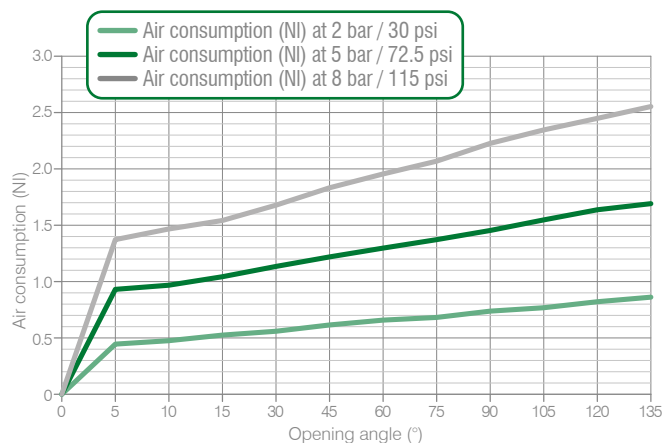

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 16/06/2015

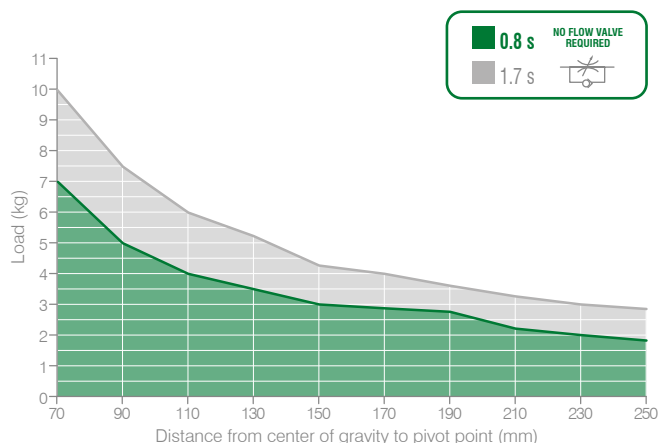

• Clamping moment (at 5 bar / 72.5 psi)

185 N m / 136,44 lb·ft

• Holding moment


800 N m / 590,04 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

Size 63 mm


Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

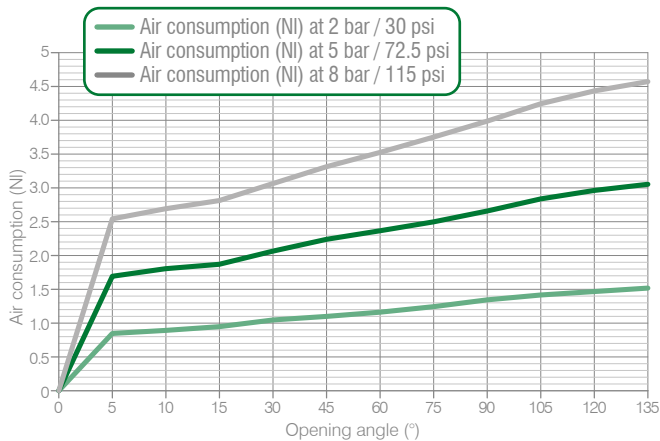

Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

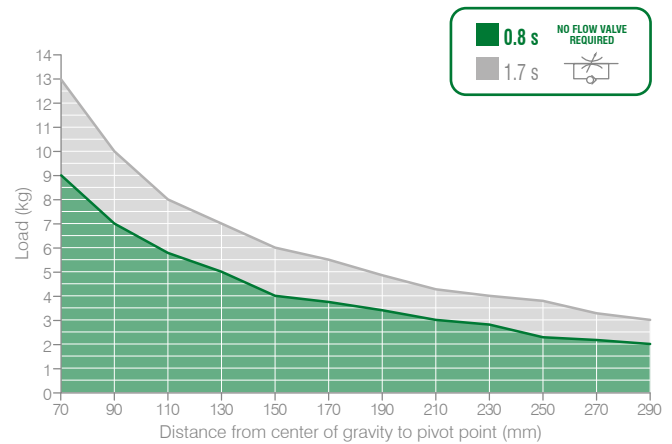

Clamping moment (at 5 bar / 72.5 psi)

390 N m / 287,64 lb·ft

Holding moment


1.500 N m / 1.106,34 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

Size 80 mm


Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 29/05/2015

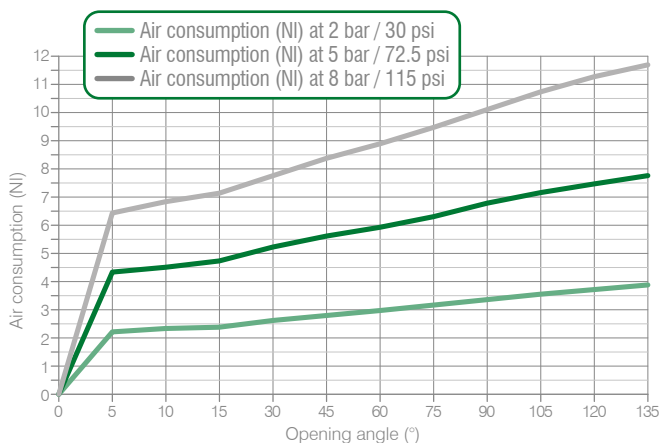

Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 29/05/2016

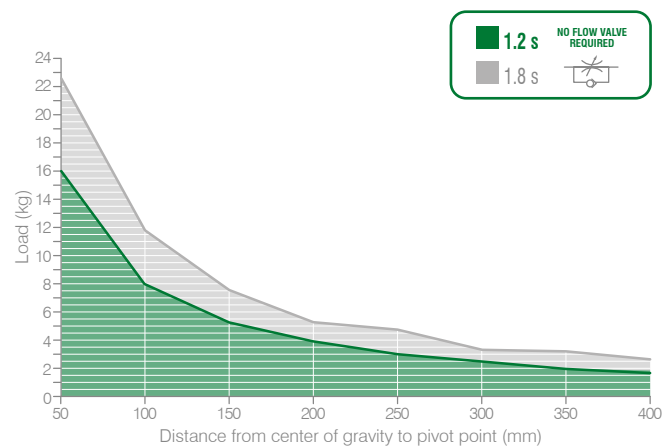

Clamping moment (at 5 bar / 72.5 psi)

850 N m / 626,92 lb·ft

Holding moment

2.500 N m / 1.843,90 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

C1-Series / Ordering string

Nano Power Clamps

C 1 P 25 E G 1 A 01

C	VERSION	C = clamp
1	MOUNTING PATTERN	1 = international mount
P	OPERATION	P = pneumatic D2 = pneumatic with manual operation (size 32 mm please see C5 Series) D0 = output shaft for manual operation - no lever and no handle included (size 32 mm please see C5 Series)
25	SIZE	25 = Ø 25 mm 32 = Ø 32 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP N = NPT (only pneumatic clamp)
1	ARM MOUNT	1 =  2 =  3 =  4 = 
A	ARM MATERIAL	A = aluminum
01	CLAMP ARM TYPE	01 = wishbone, central, 0 mm offset 04 = wishbone, central, 10 mm offset 13 = H, 0 mm offset 14 = H, 10 mm offset

C5-Series

C 5 D2 32 E 4 1 A 01

C	VERSION	C = clamp
5	MOUNTING PATTERN	5 = heavy duty style
D2	OPERATION	M2 = manual Ø 32 D2 = pneumatic with manual operation
32	SIZE	32 = size 32 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
4	FIXED OPENING ANGLE	1 = 135° 2 = 120° 6 = 55° 7 = 20°
1	ARM MOUNT	1 =  2 =  3 =  4 = 
A	ARM MATERIAL	A = aluminum
01	CLAMP ARM TYPE	01 = wishbone, central, 0 mm offset 04 = wishbone, central, 10 mm offset 13 = H, 0 mm offset 14 = H, 10 mm offset

Please see the charts in the datasheets for arm position as well as for max. opening angle

C1-Series

C 1 P 40 E G 4 A 01

C	VERSION	C = clamp
1	MOUNTING PATTERN	1 = International mount
P	OPERATION	P = pneumatic D = pneumatic with manual operation D0 = output shaft for manual operation - no lever and no handle included
40	SIZE	40 = Ø 40 mm 63 = Ø 63 mm 50 = Ø 50 mm 80 = Ø 80 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP N = NPT
4	ARM MOUNT	1 =  2 =  3 =  4 = 
A	ARM MATERIAL	A = aluminum S = steel
01	CLAMP ARM TYPE	01 = wishbone, central, 15 mm offset* 04 = wishbone, central, 45 mm offset 02 = wishbone, right, 15 mm offset* 05 = wishbone, right, 45 mm offset 03 = wishbone, left, 15 mm offset* 06 = wishbone, left, 45 mm offset

* for size 80 mm = 20 mm offset

CLAMPING

C1P45-Series

C 1 P 45 E G 1 A 54

C	VERSION	C = clamp
1	MOUNTING PATTERN	1 = International mount
P	OPERATION	P = pneumatic
45	SIZE	45 = Ø 40 mm Mounting pattern interchangeable to 50 and 63 mm bore clamps
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP
1	ARM MOUNT	1 =  2 =  4 = 
A	ARM MATERIAL	A = aluminum
54	CLAMP ARM TYPE	54 = wishbone, central, 45 mm offset 55 = wishbone, right, 45 mm offset 56 = wishbone, left, 45 mm offset



C1M-Series
C 1 M2 50 E 4 1 A 1

CLAMPING

C	VERSION	C = clamp
1	MOUNTING PATTERN	1 = international mount
M2	OPERATION	M1 = manual with straight handle M2 = manual with "D2" handle
50	SIZE	50 = size 50 mm 63 = size 63 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
4	FIXED OPENING ANGLE	1 = 135° 2 = 120° 3 = 90° 4 = 60° 5 = 45° 6 = 55° 7 = 20° 8 = 105° 9 = 30° 10 = 75°
1	ARM MOUNT	1 =  2 =  3 =  4 = 
A	ARM MATERIAL	A = aluminum
1	CLAMP ARM TYPE	01 = wishbone, central, 15 mm offset 04 = wishbone, central, 45 mm offset For the other arm types, see ordering string of C1 series

C1P25E / Nano Power clamp - International mount - 25 mm bore

WEIGHT 0.75 kg

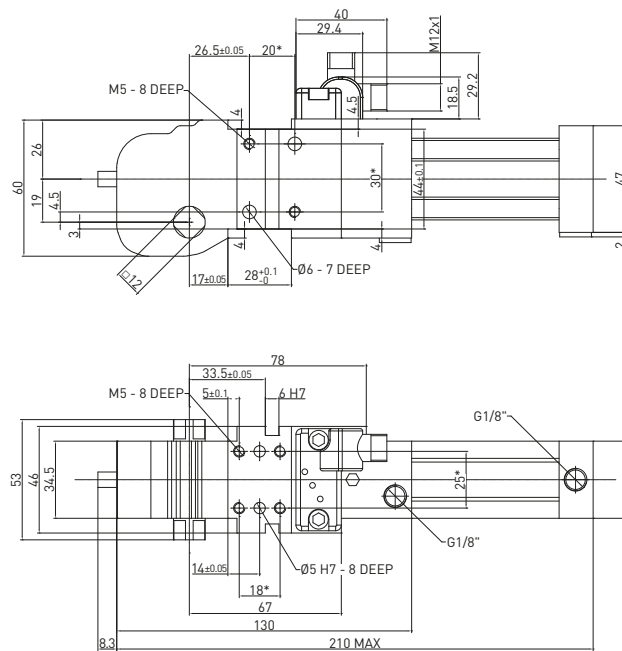

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02



DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 01 - 30/03/2021

C1D225E / Nano Power clamp - International mount - 25 mm bore with manual operation

WEIGHT 0.987 kg

D2 handle included

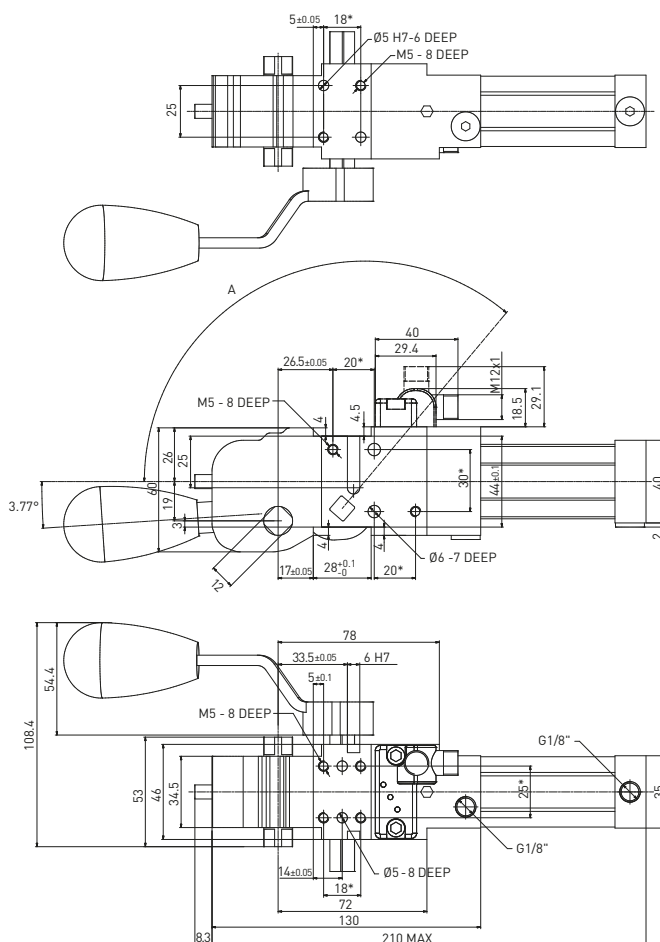

Handle swivel angle

Arm opening angle	Handle swivel angle A
0°	-3,77°
15°	19°
30°	35°
45°	53°
60°	74°
75°	94°
90°	109,5°
105°	120°
120°	126°
135°	130°

Max Hand Force: 200 N



* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 03 - 27/10/2021

Clamping arms / 12 mm shaft for clamps' size 25 mm

REV. 02 - 07/10/2015

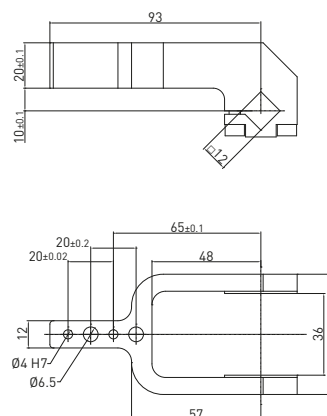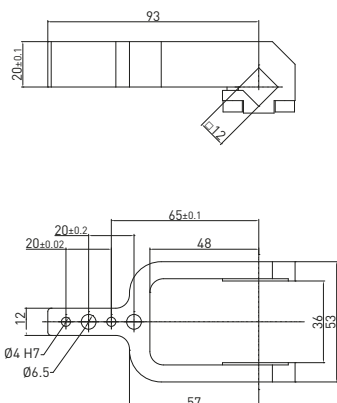

12 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B12012	Aluminum	Central	0.127	135°	105°	135°	90°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft



12 mm shaft – 10 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B12042	Aluminum	Central	0.135	135°	120°	N/A	45°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

Clamping arms / 12 mm shaft for clamps' size 25 mm and size 32 mm mm - Left & right clamping surfaces

REV. 00 - 12/04/2017

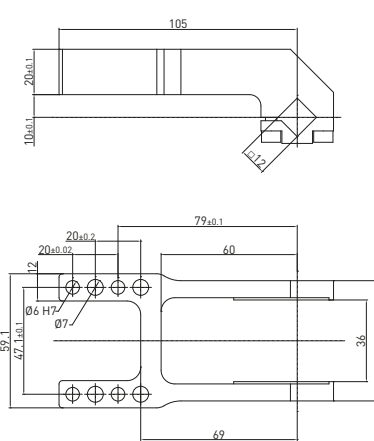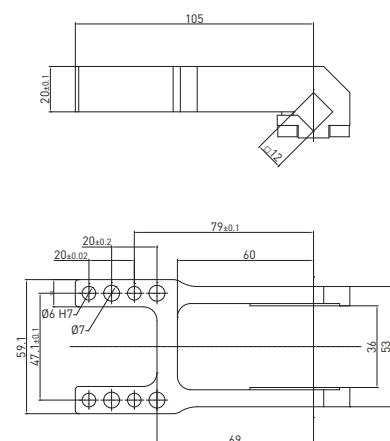

12 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1213	Aluminum	H	0.163	135°	115°	N/A	45°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft


12 mm shaft – 10 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1214	Aluminum	H	0.173	135°	115°	N/A	45°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

Clamping arms / 12 mm shaft for clamps' size 25 mm

REV. 00 - 11/02/2022

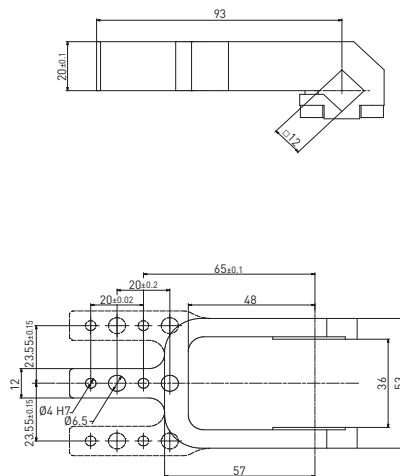


12 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B12022	Aluminum	Right	0.127	135°	105°	135°	90°
B12032	Aluminum	Left	0.127	135°	105°	135°	90°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

Clamping arms / 12 mm shaft for clamps' size 32 mm

REV. 00 - 11/02/2022

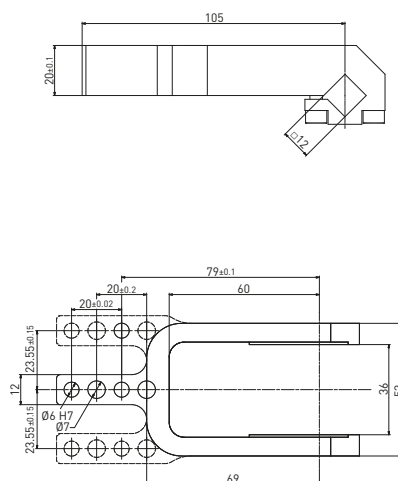


12 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B12023	Aluminum	Right	0.135	135°	112°	135°	90°
B12033	Aluminum	Left	0.135	135°	112°	135°	90°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

C1P32E / Nano Power clamp - International mount - 32 mm bore

WEIGHT 0.987 kg

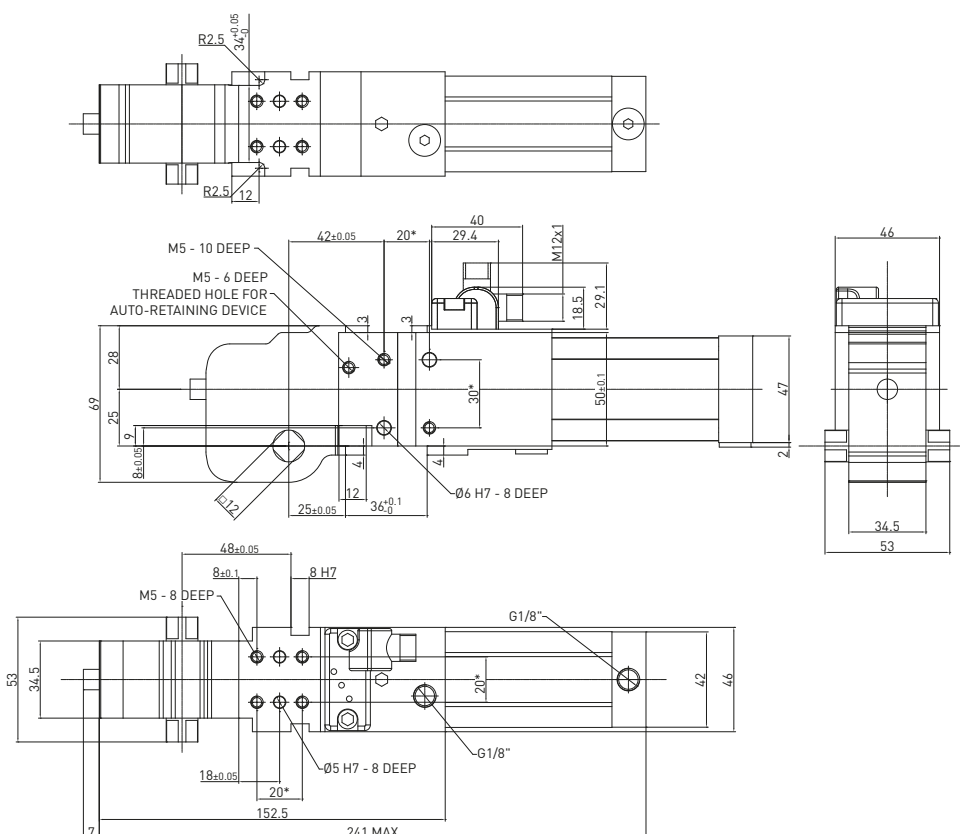

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 02 - 13/09/2017

C5D232E / Nano Power clamp - heavy duty style - International mount - 32 mm bore with manual operation

WEIGHT 1.36 kg

D2 handle included

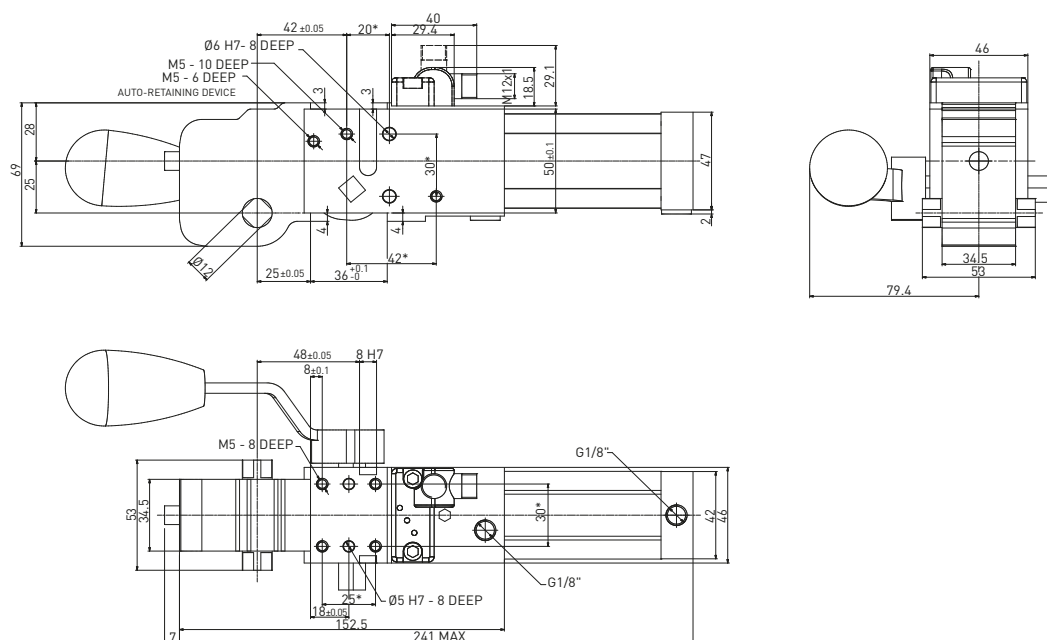

Handle swivel angle

Arm opening angle	Handle swivel angle ^A
0°	3.5°
15°	28.5°
30°	45°
45°	68°
60°	90.5°
75°	115.5°
90°	130°
105°	139°
120°	144°
135°	147°


Max Hand Force: 200 N

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 06/10/2020

C1P32E__A / Nano Power clamp - International mount - 32 mm bore

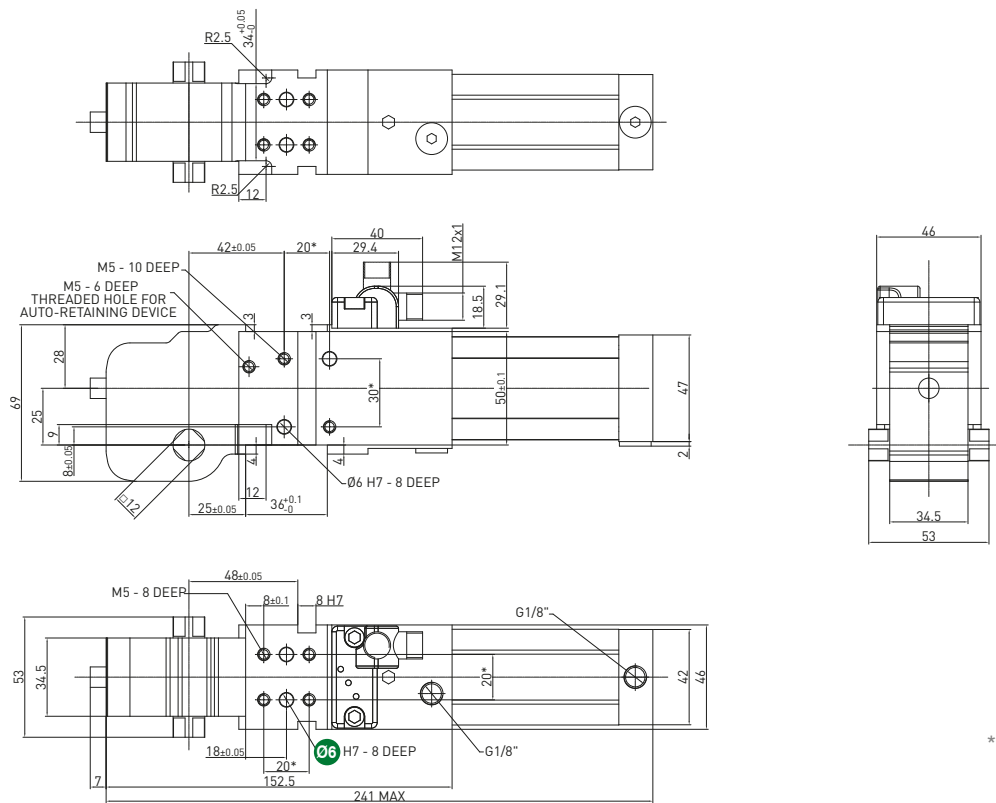WEIGHT 0.98 kg


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 28/08/2017

C5M232E / Nano Power clamp - International mount - 32 mm bore

WEIGHT 1 kg

D2 handle included

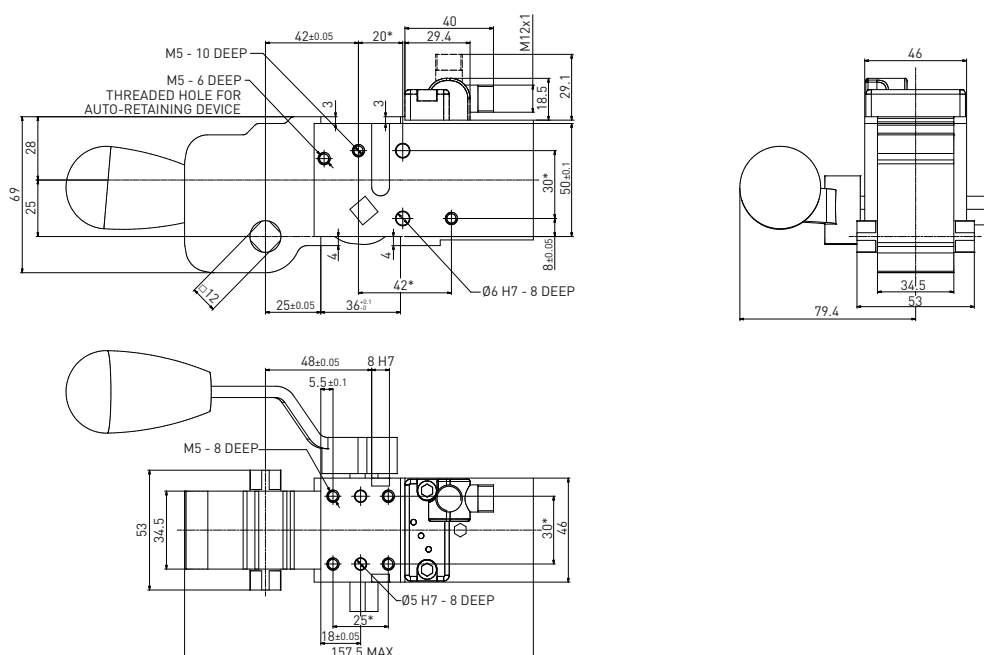

Handle swivel angle

Arm opening angle	A Handle swivel angle
0°	3.5°
15°	28.5°
30°	45°
45°	68°
60°	90.5°
75°	115.5°
90°	130°
105°	139°
120°	144°
135°	147°

Max Hand Force: 200 N



* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 06/10/2020

Clamping arms / 12 mm shaft for clamps' size 32 mm

REV. 00 - 07/10/2015

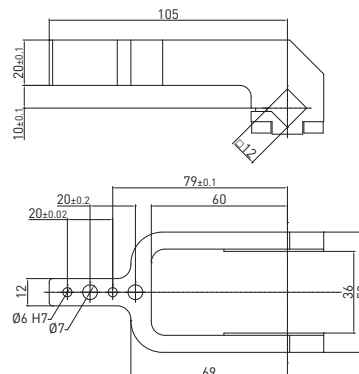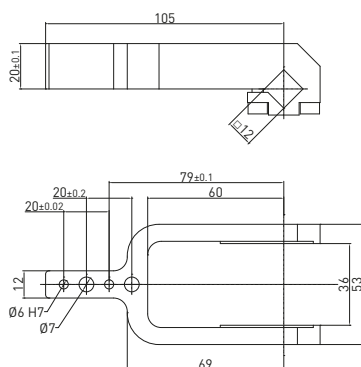

12 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B12013	Aluminum	Central	0.135	135°	112°	135°	90°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft



12 mm shaft – 10 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B12043	Aluminum	Central	0.144	135°	123°	N/A	45°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

Clamping arms / 12 mm shaft for clamps' size 25 mm and size 32 mm mm - Left & right clamping surfaces

REV. 00 - 12/04/2017

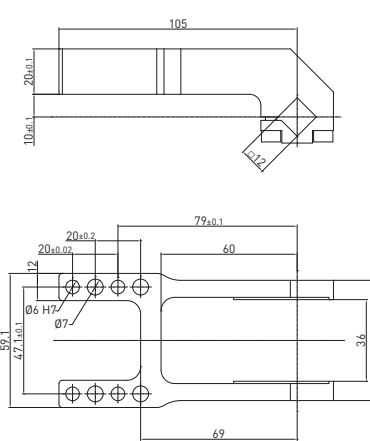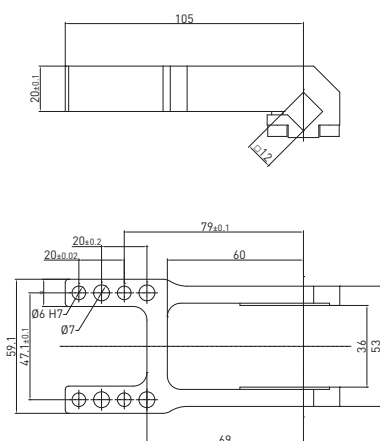

12 mm shaft – 0 mm offset



Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1213	Aluminum	H	0.163	135°	115°	N/A	45°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

12 mm shaft – 10 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1214	Aluminum	H	0.173	135°	115°	N/A	45°

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

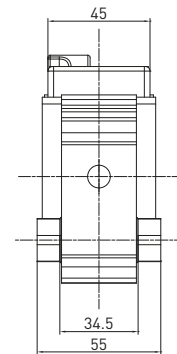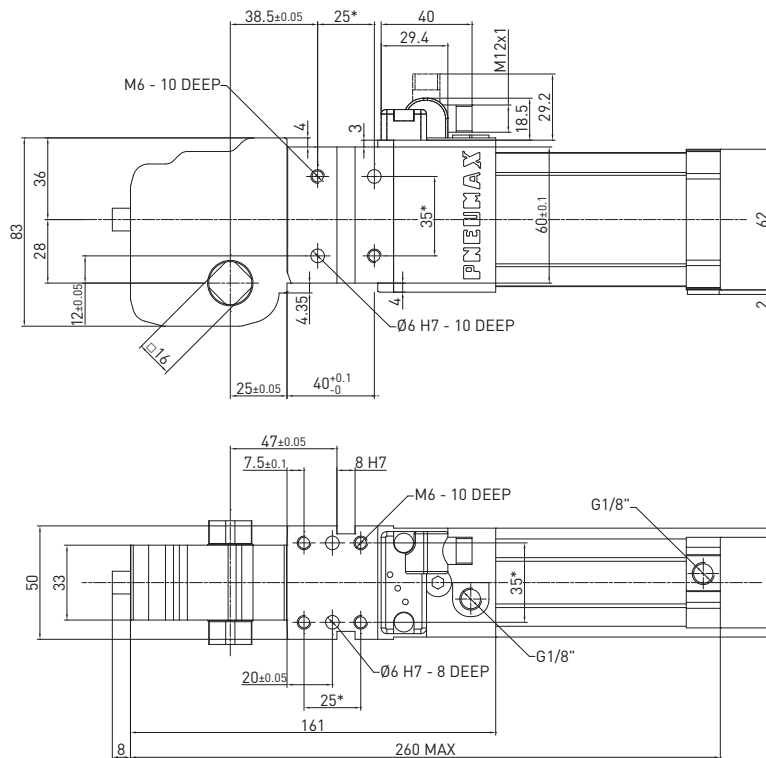C1P40E / Power clamp - International mount - 40 mm bore**WEIGHT 1.45 kg**



* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 31/03/2015

C1D_40E / Power clamp - International mount - 40 mm bore with manual operation**WEIGHT 1.75 kg**

D2 handle included

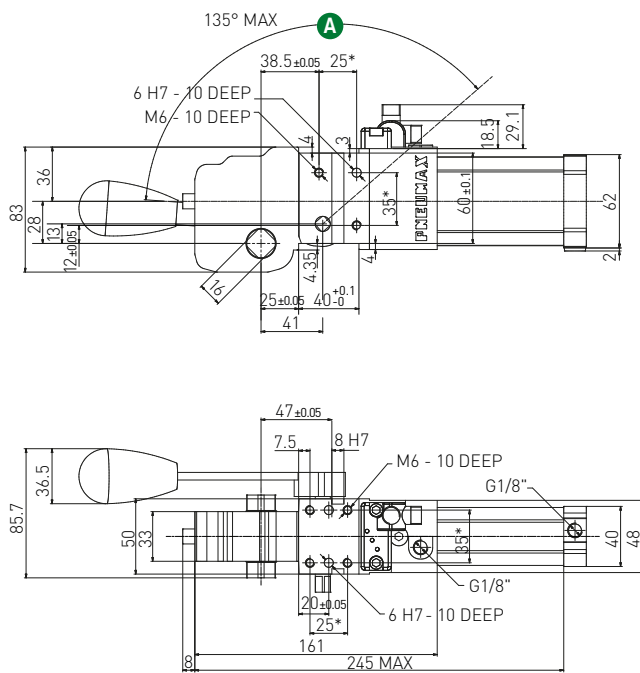**Handle swivel angle**

Arm opening angle	Handle swivel angle A
0°	4.12°
15°	22.65°
30°	38.2°
45°	58.4°
60°	83.6°
75°	107.6°
90°	123.6°
105°	132.75°
120°	137.7°
135°	140°

Max Hand Force: 200 N

D1 version

M5x16 screws
Tightening torque: 5 Nm / 3.68 Lb ft

D2 version

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02





DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 01 - 03/05/2022

Clamping arms / 16 mm shaft

REV. 00 - 31/03/2015

CLAMPING

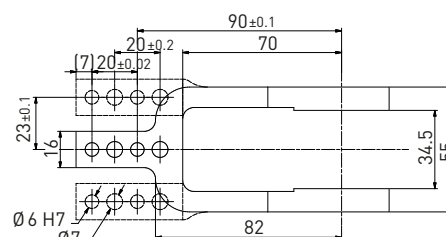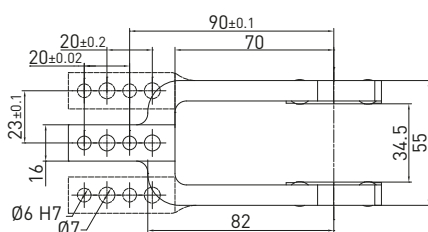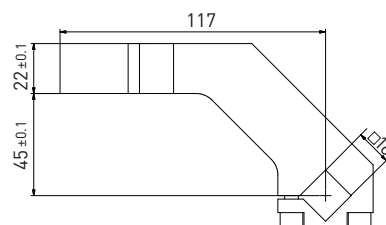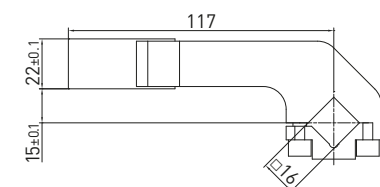

16 mm shaft – 15 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1601	Aluminum	Central	0.24	135°	125°	N/A	45°
Q1601	Steel	Central	0.44	135°	125°	N/A	45°
B1602	Aluminum	Right	0.24	135°	125°	N/A	45°
Q1602	Steel	Right	0.46	135°	125°	N/A	45°
B1603	Aluminum	Left	0.24	135°	125°	N/A	45°
Q1603	Steel	Left	0.46	135°	125°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft


16 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1604	Aluminum	Central	0.3	135°	135°	N/A	45°
Q1604	Steel	Central	0.55	135°	135°	N/A	45°
B1605	Aluminum	Right	0.3	135°	135°	N/A	45°
Q1605	Steel	Right	0.57	135°	135°	N/A	45°
B1606	Aluminum	Left	0.3	135°	135°	N/A	45°
Q1606	Steel	Left	0.57	135°	135°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

Clamping arms / 16 mm shaft

REV. 00 - 12/05/2017

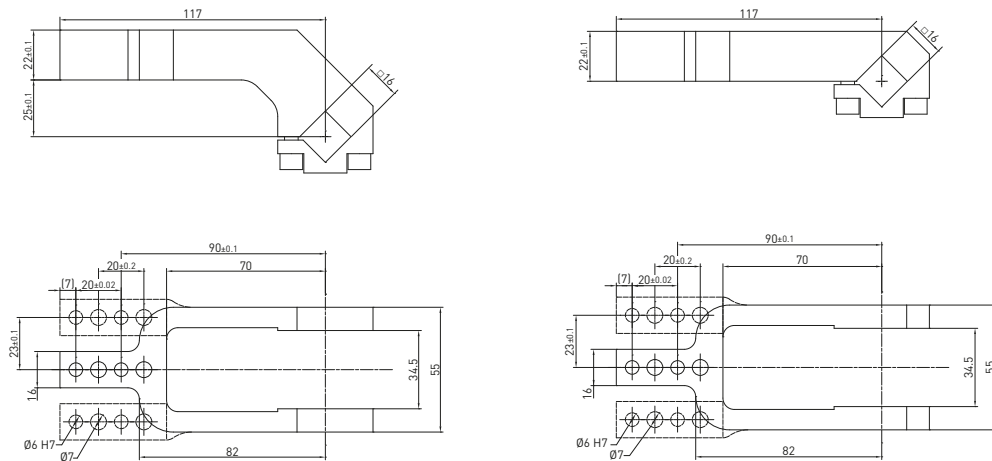

16 mm shaft – 25 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1621	Aluminum	Central	0.25	135°	135°	N/A	45°
B1622	Aluminum	Right	0.25	135°	135°	N/A	45°
B1623	Aluminum	Left	0.25	135°	135°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft


16 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1618	Aluminum	Central	0.25	135°	105°	135°	90°
B1619	Aluminum	Right	0.25	135°	105°	135°	90°
B1620	Aluminum	Left	0.25	135°	105°	135°	90°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

Clamping arms / 16 mm shaft - Left & right clamping surfaces

REV. 00 - 07/11/2019

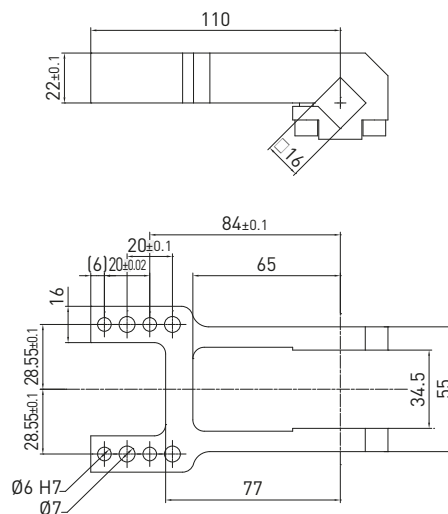


16 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1613	Aluminum	H	0.27	125°	45°	135°	35° MAX

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

Clamping arms / 16 mm shaft

REV. 00 - 31/03/2015

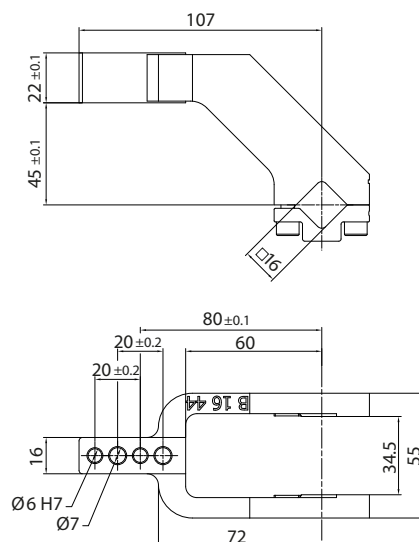



16 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1644	Aluminum	Central	0.18	135°	135°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

C1P45EG / **Power clamp** - 40 mm bore cylinder and mounting pattern interchangeable to 50 and 63 mm bore clamps

WEIGHT 1.45 kg

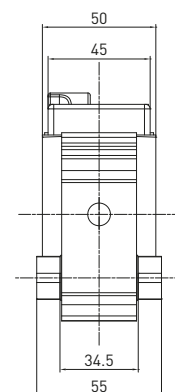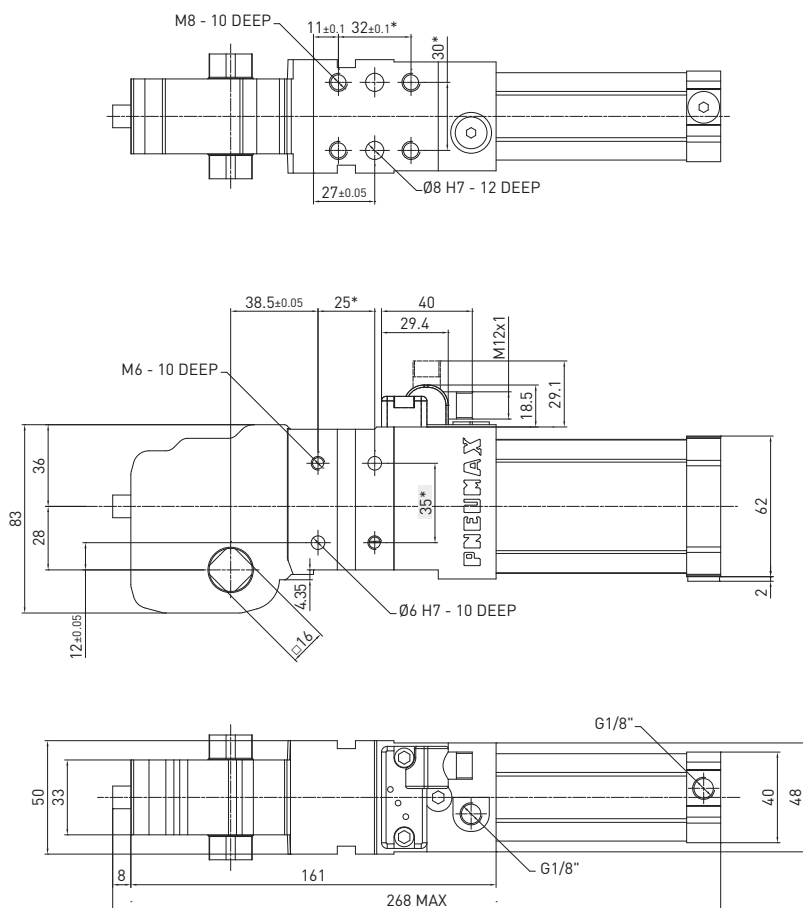


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02
DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 23/04/2019

Clamping arms / 16 mm shaft

REV. 00 - 23/04/2019

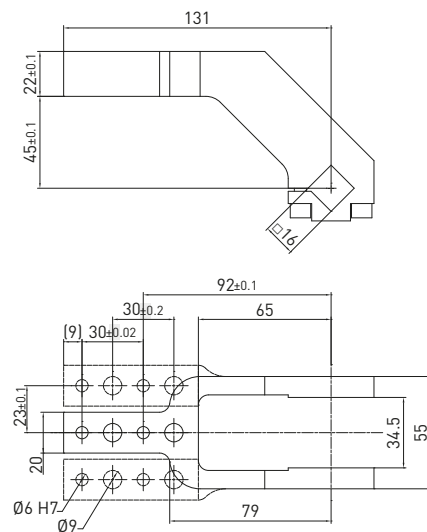


16 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1654	Aluminum	Central	0.3	135°	135°	N/A	45°
B1655	Aluminum	Right	0.3	135°	135°	N/A	45°
B1656	Aluminum	Left	0.3	135°	135°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

C1P50E / Power clamp - International mount - 50 mm bore




WEIGHT 2.7 kg

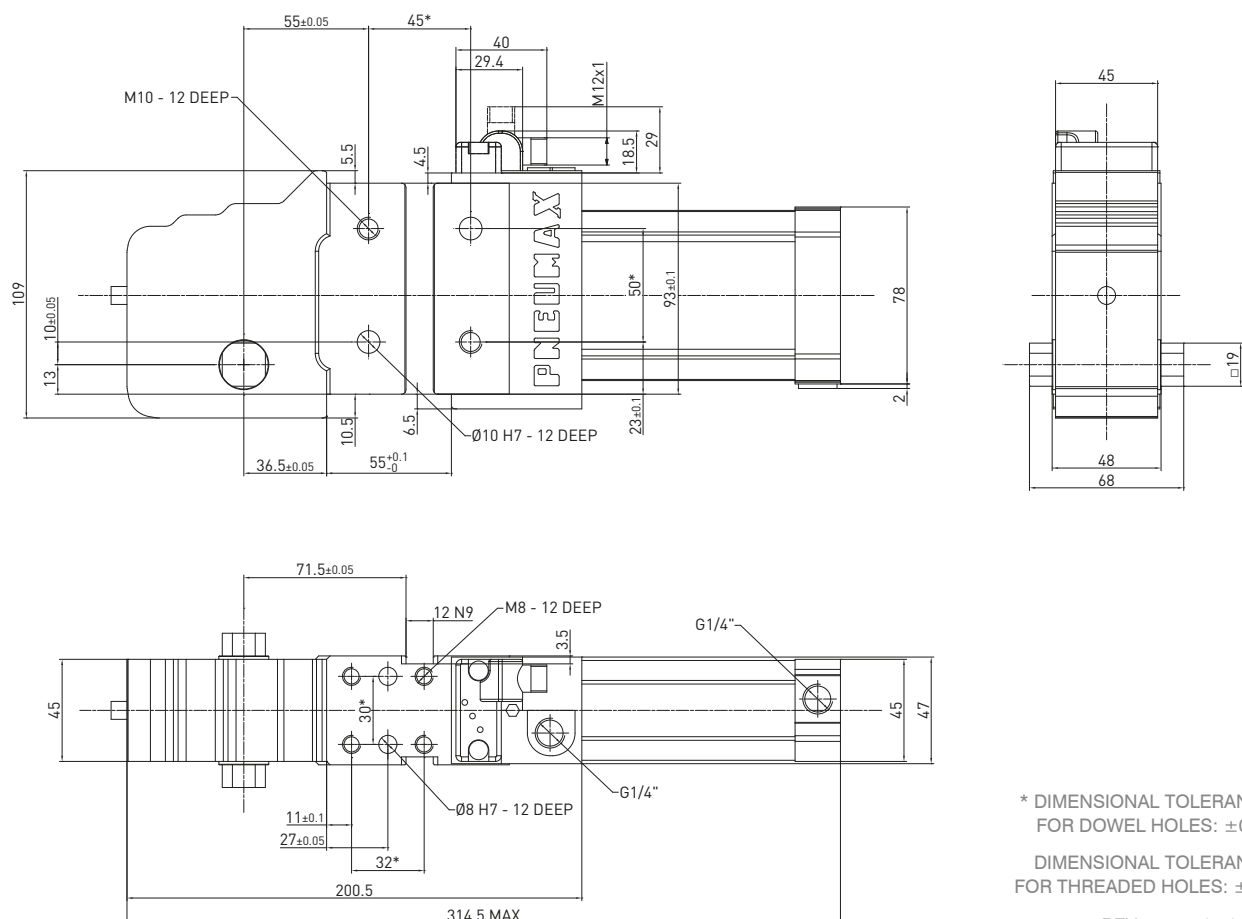* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02 DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 31/03/2015


C1D_50E / Power clamp - International mount - 50 mm bore with manual operation

WEIGHT 3.1 kg
D2 handle included

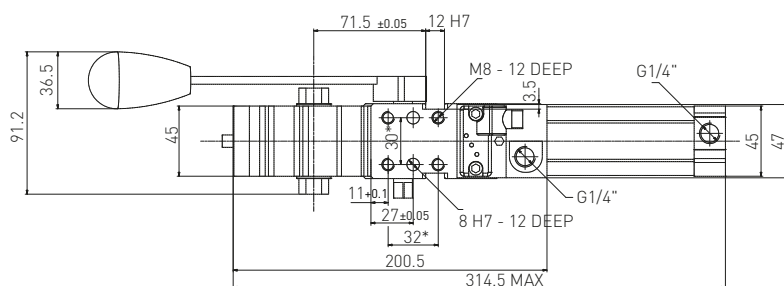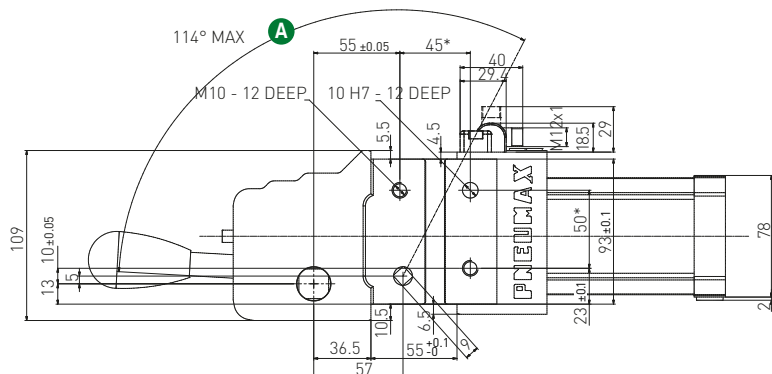

D1 version

M5x16 screws
Tightening torque: 5 Nm / 3.68 Lb ft

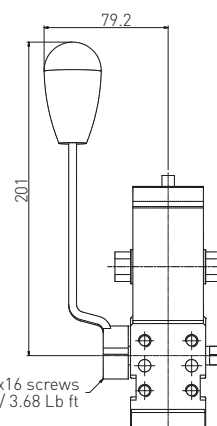

D2 version

Handle swivel angle

Arm opening angle	Handle swivel angle (A)
0°	3.25°
15°	27°
30°	43°
45°	59.3°
60°	75.4°
75°	89.75°
90°	101°
105°	109°
120°	114.25°
135°	117.2°

Max Hand Force: 200 N




* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1


REV. 00 - 29/08/2017

C1M_50E / Manual power clamp - International mount

WEIGHT 2.9 kg
D2 handle included

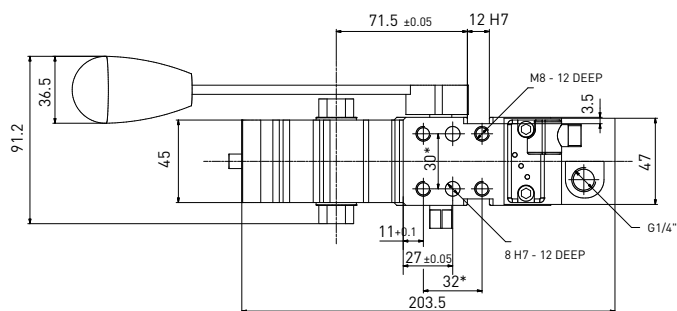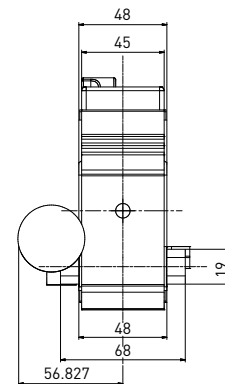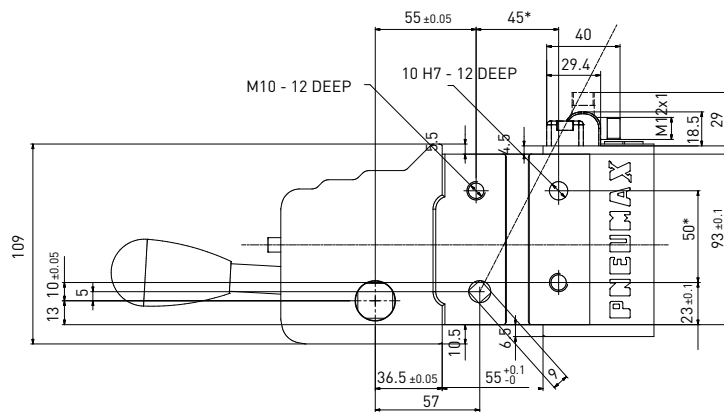

D1 version

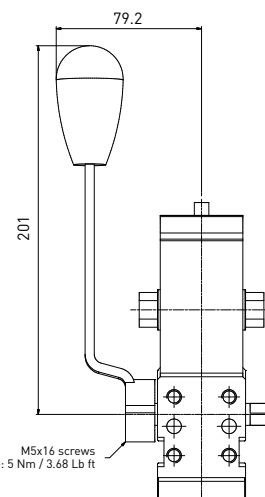

D2 version

Handle swivel angle

Arm opening angle	^A Handle swivel angle
0°	3.25°
15°	27°
30°	43°
45°	59.3°
60°	75.4°
75°	89.75°
90°	101°
105°	109°
120°	114.25°
135°	117.2°

Max Hand Force: 200 N




* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 29/08/2017

Clamping arms / 19 mm shaft

REV. 01 - 08/02/2019

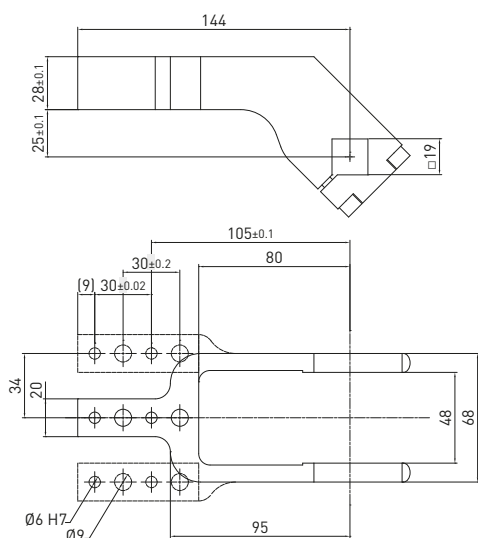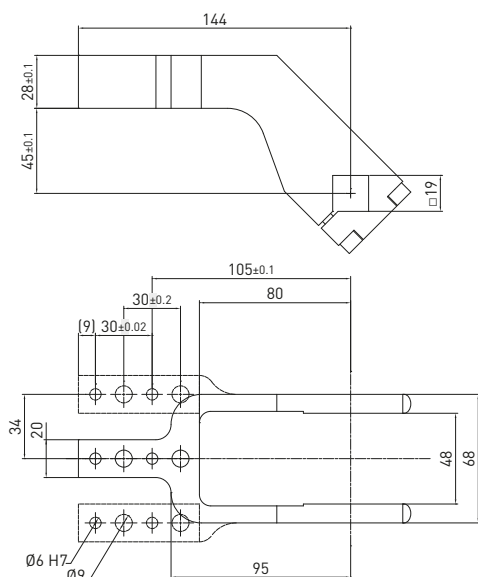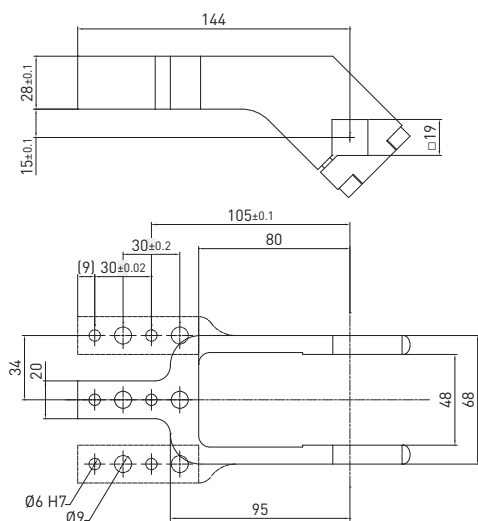


19 mm shaft – 15 mm offset



Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1901	Aluminum	Central	0.41	135°	115°	135°	80°
Q1901	Steel	Central	0.71	135°	115°	135°	80°
B1902	Aluminum	Right	0.43	135°	115°	135°	80°
Q1902	Steel	Right	0.79	135°	115°	135°	80°
B1903	Aluminum	Left	0.43	135°	115°	135°	80°
Q1903	Steel	Left	0.79	135°	115°	135°	80°
B1907	Aluminum	Central	0.41	135°	115°	135°	80°
B1908	Aluminum	Right	0.43	135°	115°	135°	80°
B1909	Aluminum	Left	0.43	135°	115°	135°	80°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb ft

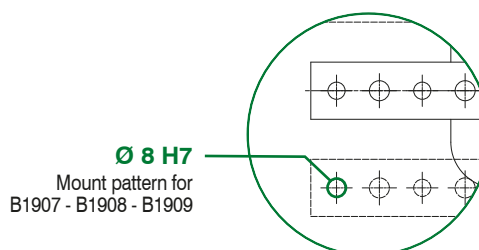

19 mm shaft – 45 mm offset



Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1904	Aluminum	Central	0.45	135°	135°	135°	80°
Q1904	Steel	Central	0.77	135°	135°	135°	80°
B1905	Aluminum	Right	0.46	135°	135°	135°	80°
Q1905	Steel	Right	0.81	135°	135°	135°	80°
B1906	Aluminum	Left	0.46	135°	135°	135°	80°
Q1906	Steel	Left	0.81	135°	135°	135°	80°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb ft

19 mm shaft – 25 mm offset






Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1921	Aluminum	Central	0.43	135°	115°	135°	80°
B1922	Aluminum	Right	0.44	135°	115°	135°	80°
B1923	Aluminum	Left	0.44	135°	115°	135°	80°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb ft

C1P63E / Power clamp - International mount - 63 mm bore




WEIGHT 3.5 kg

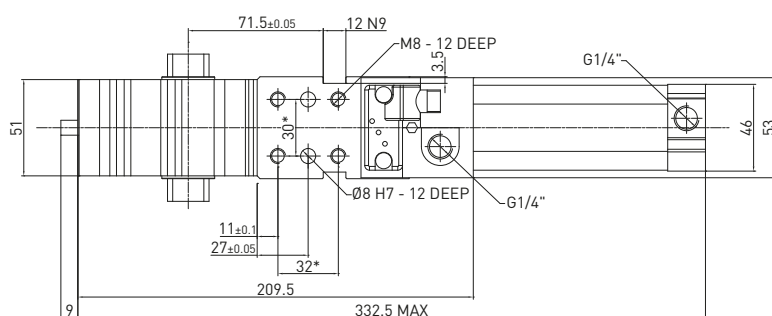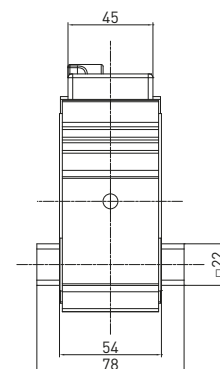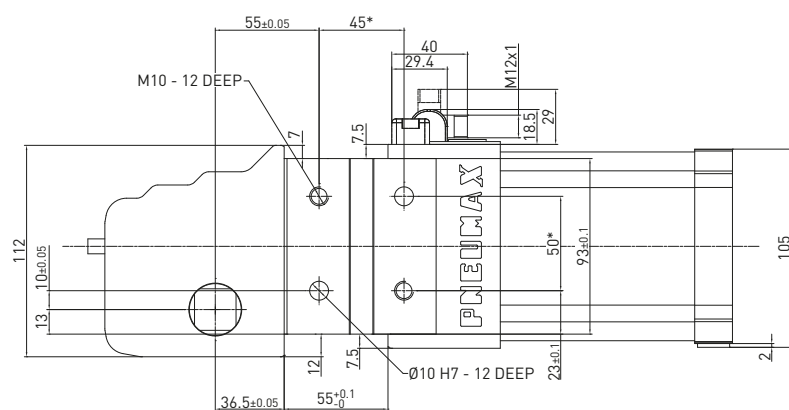* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1


REV. 00 - 31/03/2015

C1D_63E / Power clamp - International mount - 63 mm bore with manual operation

WEIGHT 3.93 kg
D2 handle included

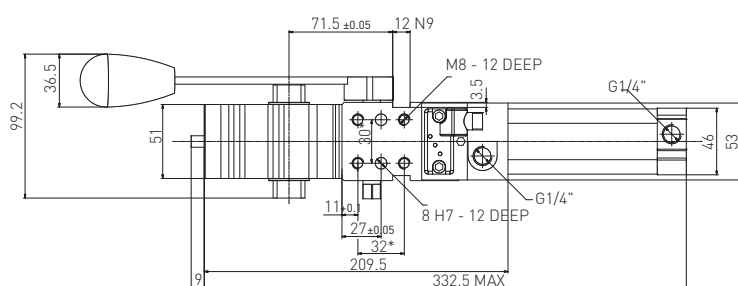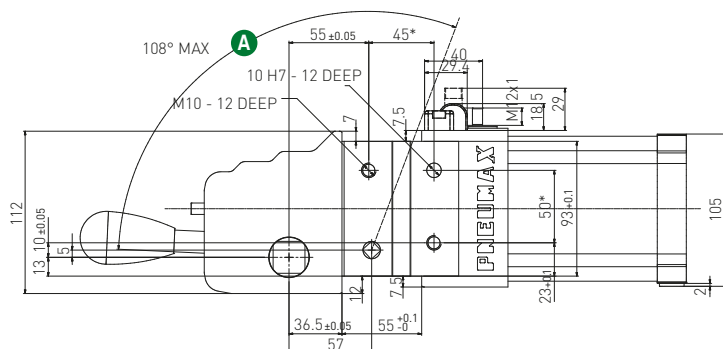

M5x16 screws
Tightening torque: 5 Nm / 3.68 Lb ft

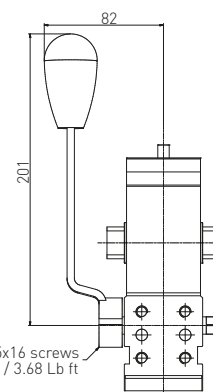

D1 version

D2 version

Handle swivel angle




Arm opening angle	Handle swivel angle A
0°	2.65°
15°	26.35°
30°	41.38°
45°	56°
60°	70.38°
75°	83.43°
90°	94°
105°	102°
120°	107°
135°	110.7°

Max Hand Force: 200 N

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 17/06/2015

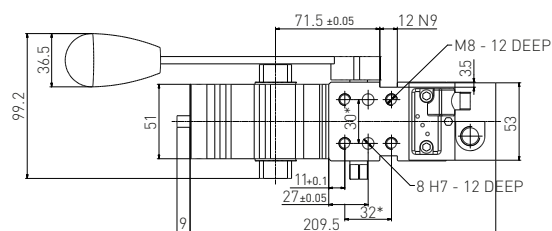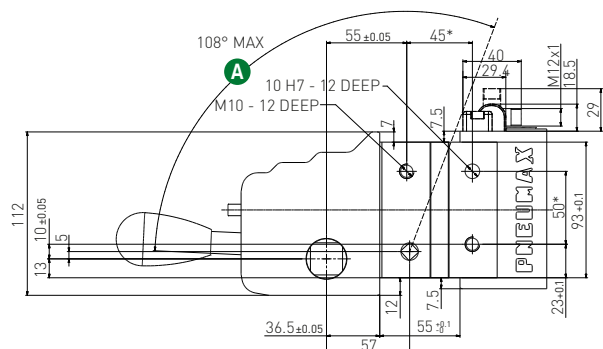C1M_63E / Manual power clamp - International mount
WEIGHT 3.3 kg
 D2 handle included

Handle swivel angle

Arm opening angle	A Handle swivel angle
0°	2.65°
15°	26.35°
30°	41.38°
45°	56°
60°	70.38°
75°	83.43°
90°	94°
105°	102°
120°	107°
135°	110.7°

Max Hand Force: 200 N





 * DIMENSIONAL TOLERANCE
 FOR DOWEL HOLES: ± 0.02

 DIMENSIONAL TOLERANCE
 FOR THREADED HOLES: ± 0.1

REV. 00 - 19/01/2022

Clamping arms / 22 mm shaft

REV. 01 - 08/02/2019

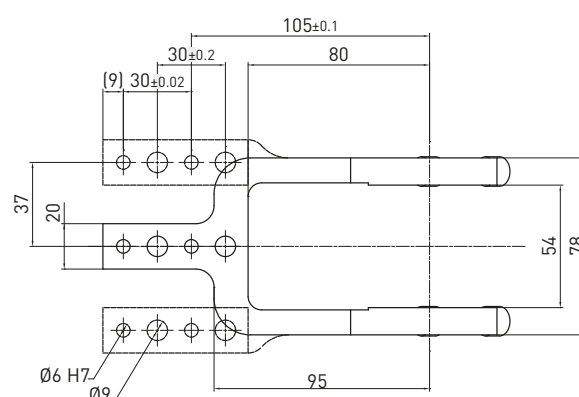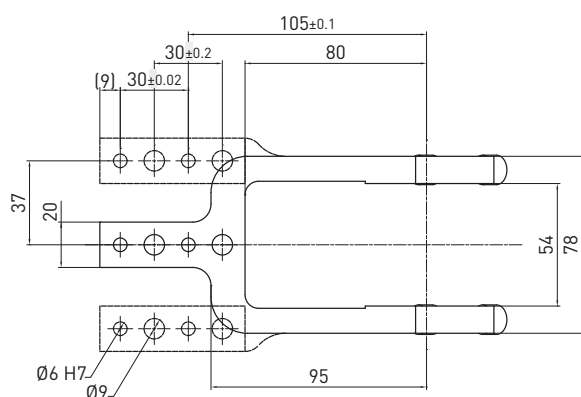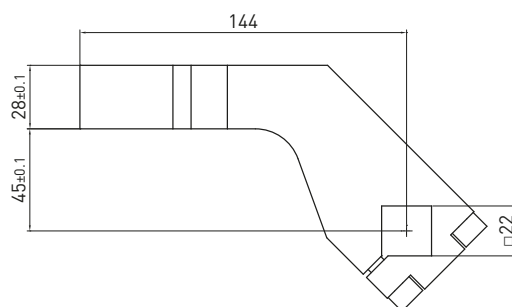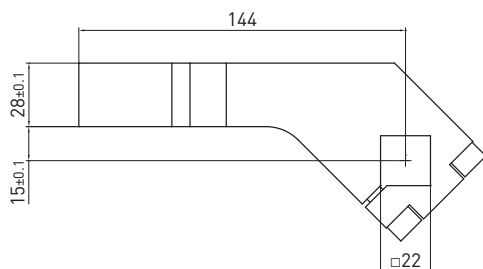

Ø 8 H7
Mount pattern for
B2210 - B2211 - B2212

22 mm shaft – 15 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B2201	Aluminum	Central	0.52	135°	115°	135°	80°
Q2201	Steel	Central	0.9	135°	115°	135°	80°
B2202	Aluminum	Right	0.54	135°	115°	135°	80°
Q2202	Steel	Right	0.93	135°	115°	135°	80°
B2203	Aluminum	Left	0.54	135°	115°	135°	80°
Q2203	Steel	Left	0.93	135°	115°	135°	80°

Screws: M8x25 Tightening torque: 25 N m / 18.43 lb ft

22 mm shaft – 15 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B2215	Aluminum	H	0.63	135°	115°	135°	80°

Screws: M8x25 Tightening torque: 25 N m / 18.43 lb ft


22 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B2204	Aluminum	Central	0.57	135°	135°	135°	75°
Q2204	Steel	Central	0.98	135°	135°	135°	75°
B2205	Aluminum	Right	0.58	135°	135°	135°	75°
Q2205	Steel	Right	1.02	135°	135°	135°	75°
B2206	Aluminum	Left	0.58	135°	135°	135°	75°
Q2206	Steel	Left	1.02	135°	135°	135°	75°

Screws: M8x25 Tightening torque: 25 N m / 18.43 lb ft

Clamping arms / 22 mm shaft

REV. 01 - 08/02/2019

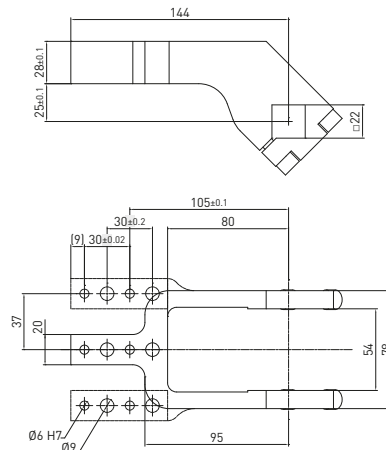


22 mm shaft – 25 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B2221	Aluminum	Central	0.55	135°	115°	135°	80°
B2222	Aluminum	Right	0.57	135°	115°	135°	80°
B2223	Aluminum	Left	0.57	135°	115°	135°	80°

Screws: M8x25 Tightening torque: 25 N m / 18.43 lb ft

C1P80E / Power clamp - International mount - 80 mm bore


WEIGHT 8.54 kg

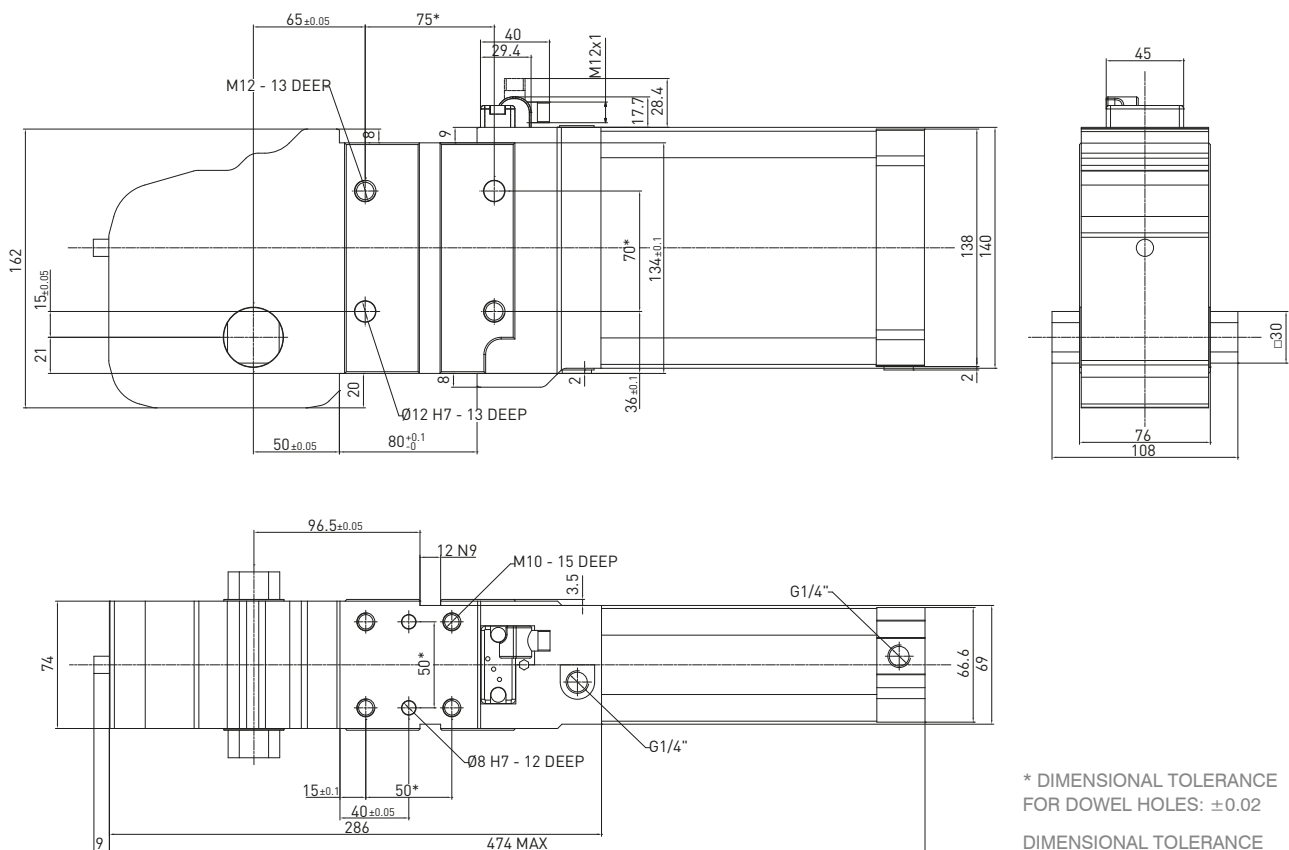* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02 DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 31/03/2015

C1D280E / Power clamp - International mount - 80 mm bore with manual operation

WEIGHT 9.8 kg

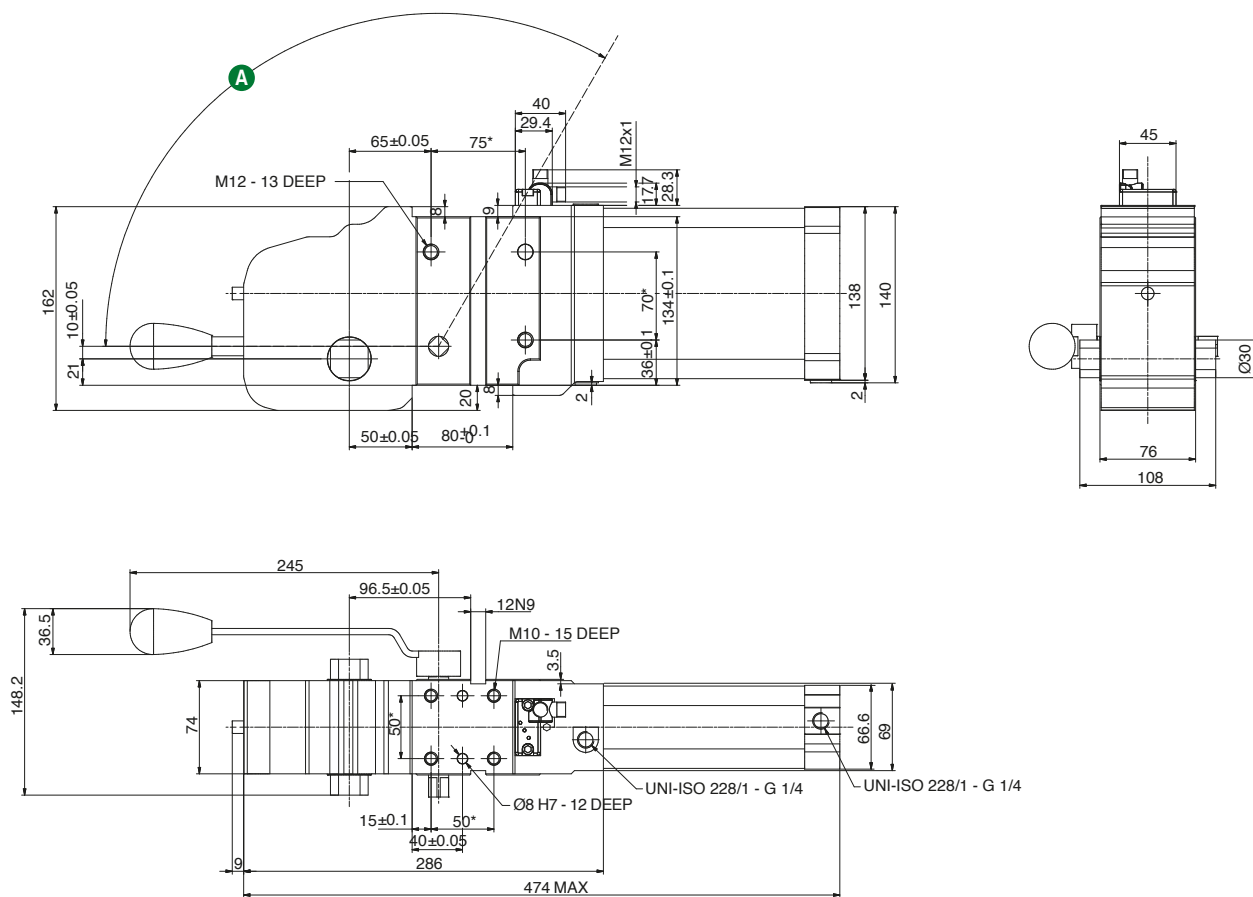

Handle swivel angle

Arm opening angle	Handle swivel angle A
0°	3°
15°	22°
30°	36°
45°	51.3°
60°	68°
75°	84.2°
90°	98°
105°	108°
120°	115°
135°	119°

Max Hand Force: 200 N


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 03/03/2017

Clamping arms / 30 mm shaft

REV. 01 - 08/02/2019

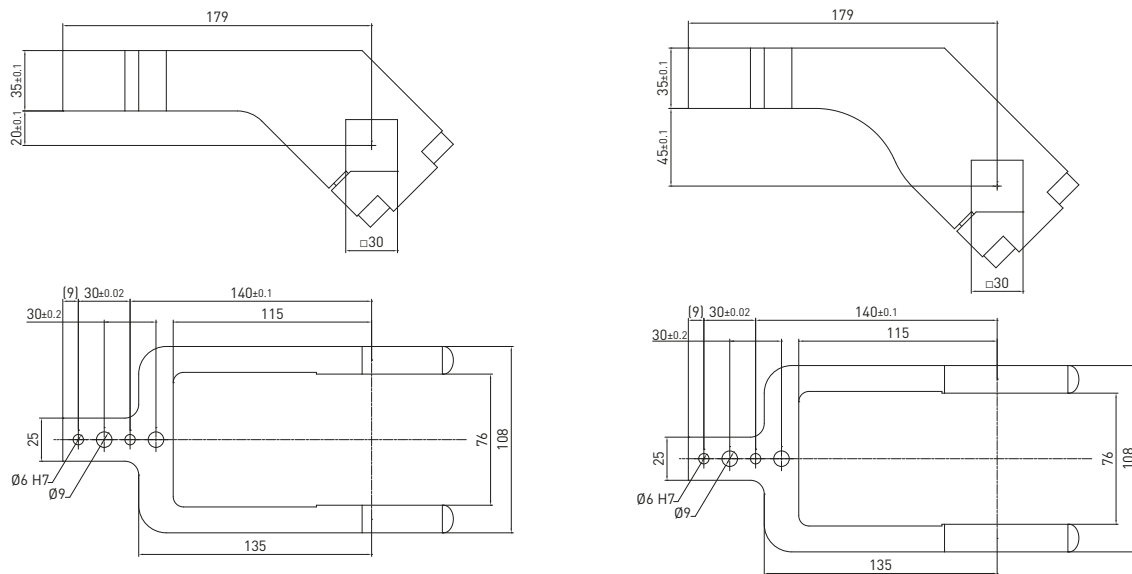

30 mm shaft – 20 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B3001	Aluminum	Central	1.1	135°	110°	135°	75°
B3002	Aluminum	Right	1.15	135°	110°	135°	75°
B3003	Aluminum	Left	1.15	135°	110°	135°	75°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft


30 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B3004	Aluminum	Central	1.18	135°	110°	135°	75°
B3005	Aluminum	Right	1.2	135°	110°	135°	75°
B3006	Aluminum	Left	1.2	135°	110°	135°	75°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

Clamping arms / 30 mm shaft

REV. 00 - 28/11/2019

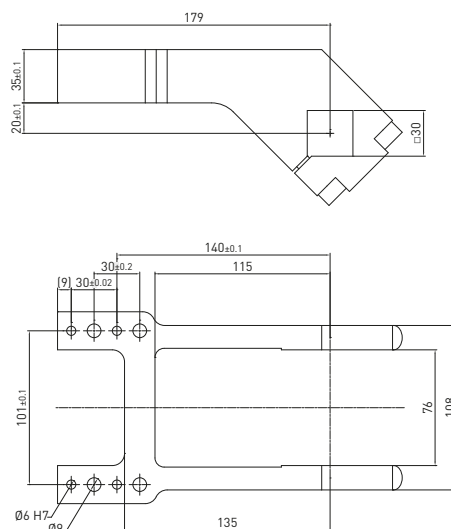

30 mm shaft – 20 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B3016	Aluminum	H	1.4	135°	110°	135°	75°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

C2-Series

Pneumatic power clamps conforming to the NAAMS Standard

GLOBAL STANDARD COMPONENTS
NAAMS



Pneumax clamps' series have all been developed with a modern and compact design which goes towards **enhancing the operational performances**, such as the cycle time, combined with a very limited total weight without compromising their **strength** and **resistance**.

Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features


Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 40 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

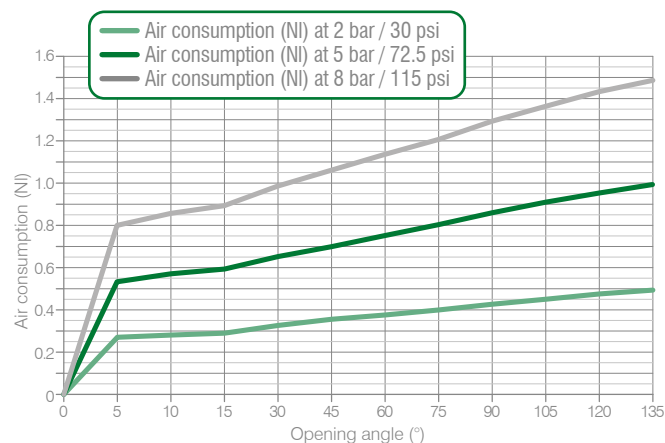

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

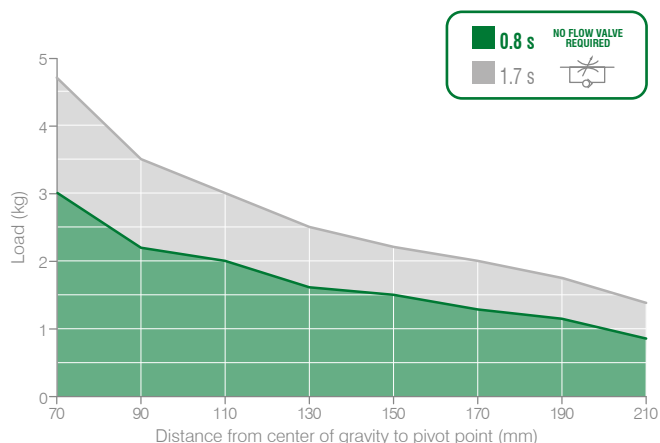

• Clamping moment (at 5 bar / 72.5 psi)

130 N m / 95,88 lb·ft

• Holding moment


380 N m / 280,27 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

Size 50 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 16/06/2015

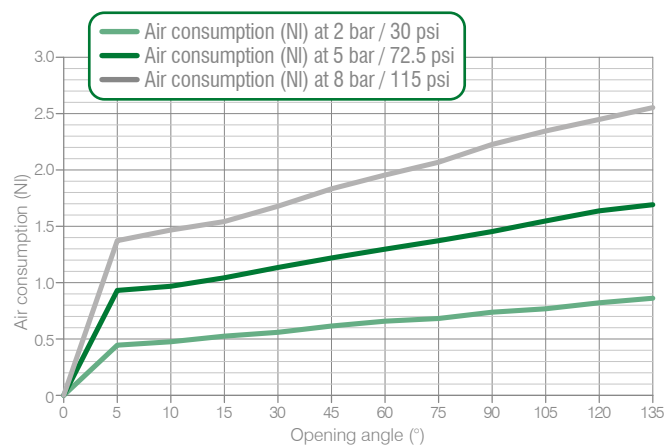

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 16/06/2015

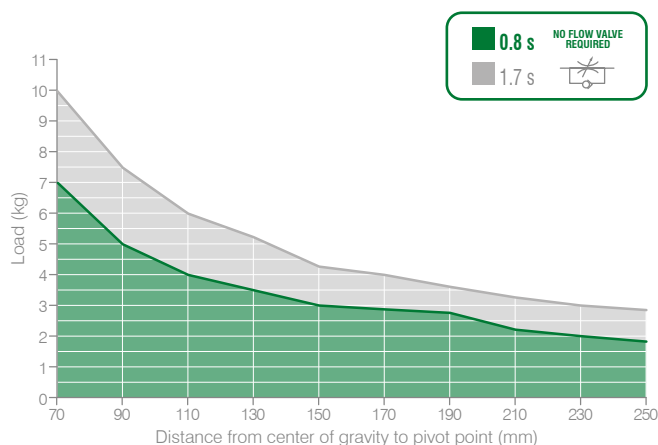

• Clamping moment (at 5 bar / 72.5 psi)

185 N m / 136,44 lb·ft

• Holding moment


800 N m / 590,04 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

Size 63 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

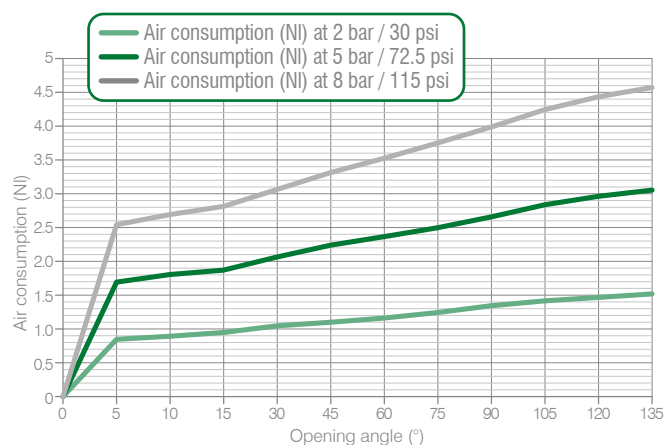

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

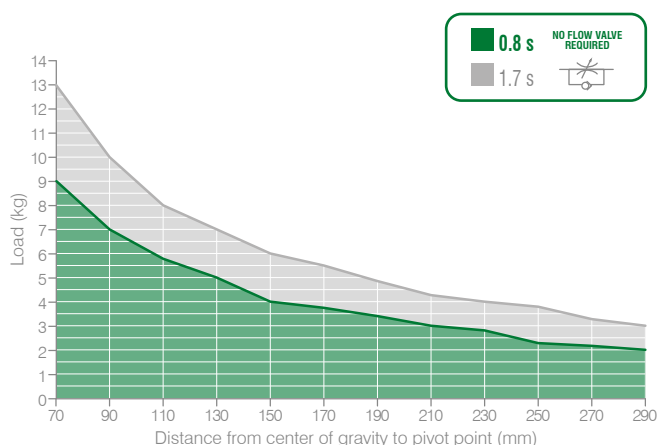

• Clamping moment (at 5 bar / 72.5 psi)

390 N m / 287,64 lb·ft

• Holding moment


1.500 N m / 1.106,34 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

Size 80 mm


Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 29/05/2015

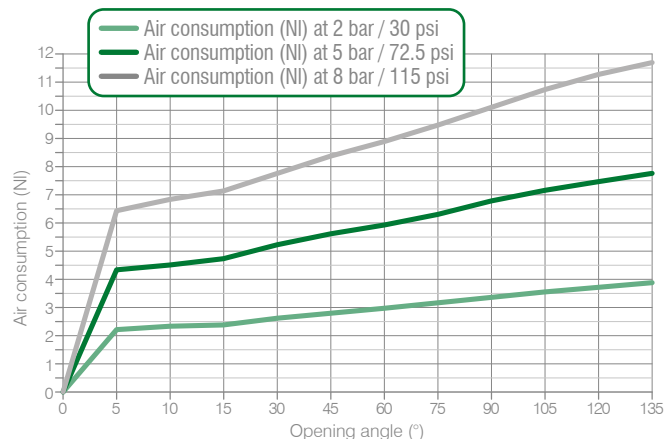

Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 29/05/2016

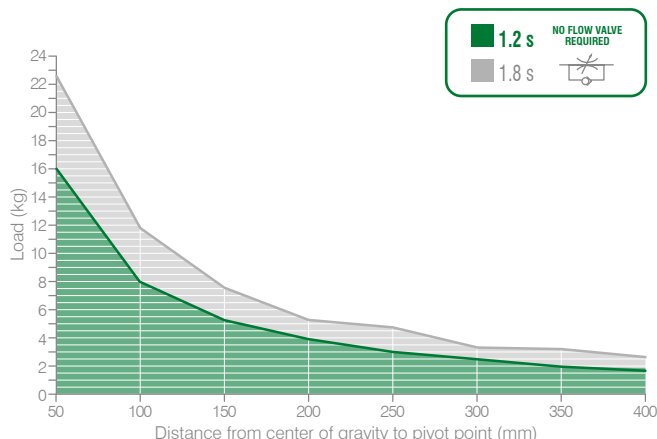

Clamping moment (at 5 bar / 72.5 psi)

850 N m / 626,92 lb·ft

Holding moment

2.500 N m / 1.843,90 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

C2-Series / Ordering string

C2-Series


C 2 P 50 E N L

C	VERSION	C = clamp	
2	MOUNTING PATTERN	2 = NAAMS Standard	GLOBAL STANDARD COMPONENTS NAAMS
P	OPERATION	P = pneumatic D = pneumatic with manual operation D0 = output shaft for manual operation - no lever and no handle included	
50	SIZE	40 = Ø 40 mm 63 = Ø 63 mm 50 = Ø 50 mm 80 = Ø 80 mm	
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP	
N	PORTS	G = G thread – BSPP N = NPT	
L	SHAFT OUTPUT	L = dual output L = single output - LEFT R = single output - RIGHT	Not available for size 40 mm

NAAMS clamping arms to be ordered separately
Please see the charts in the datasheets
for arm position as well as for max. opening angle

C2P40E / Power clamp - NAAMS Std - 40 mm bore

WEIGHT 1.45 kg

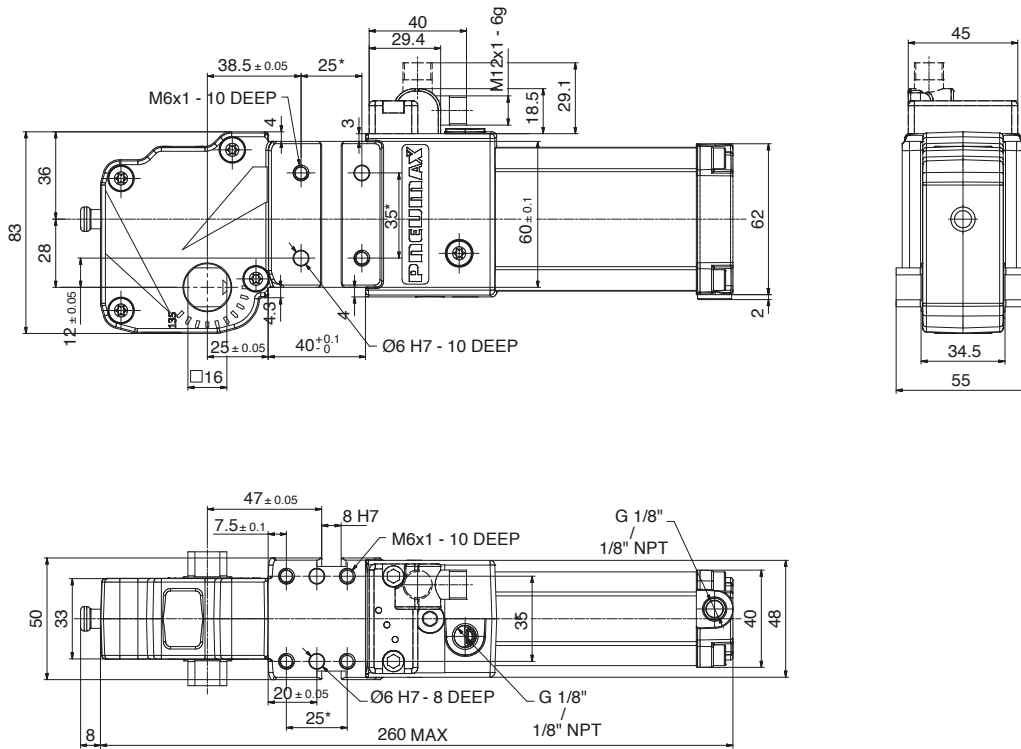
* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02 DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 16/04/2025

C2D_40E / Power clamp - NAAMS Std - 40 mm bore with manual operation

WEIGHT 1.75 kg

D2 handle included

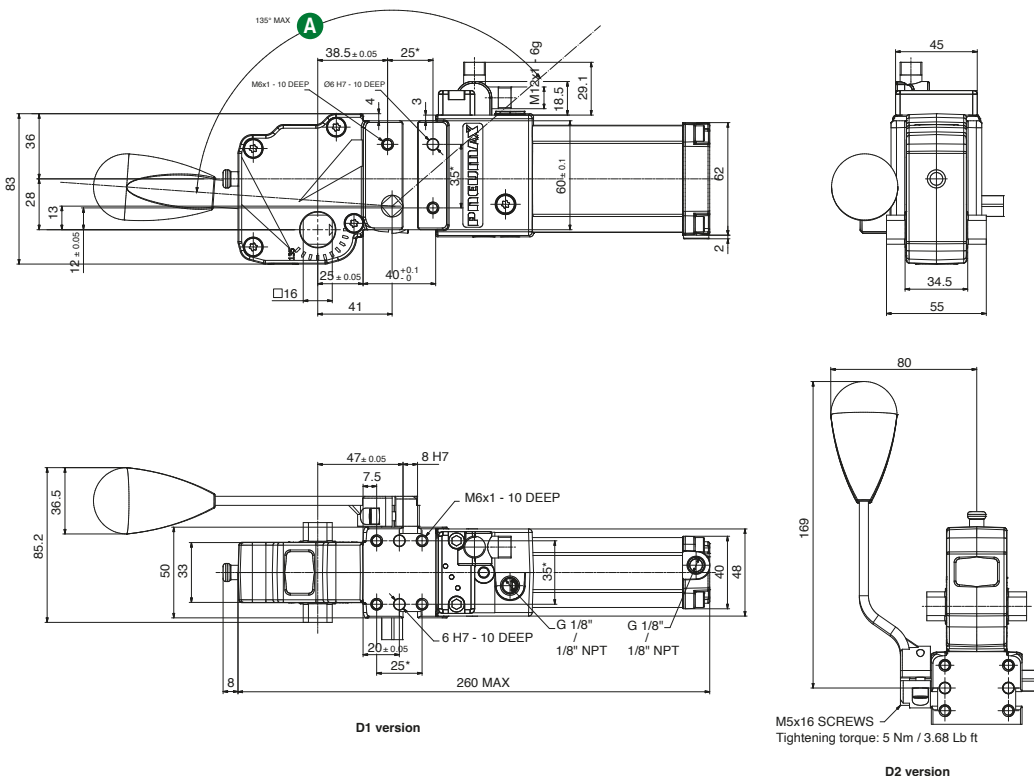

Handle swivel angle

Arm opening angle	Handle swivel angle A
0°	4.12°
15°	22.65°
30°	38.2°
45°	58.4°
60°	83.6°
75°	107.6°
90°	123.6°
105°	132.75°
120°	137.7°
135°	140°

Max Hand Force: 200 N


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02 DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 16/04/2025

Clamping arms / 16 mm shaft - NAAMS Std

REV 00 - 14/04/2025

CLAMPING

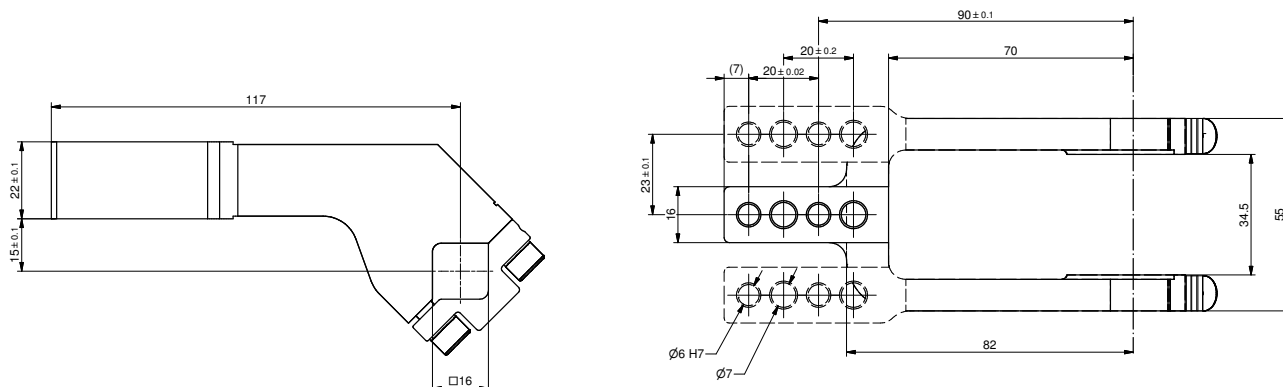


16 mm shaft – 15 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1601N	Aluminum	Central	0.24	135°	125°	N/A	45°
B1602N	Aluminum	Right	0.24	135°	125°	N/A	45°
B1603N	Aluminum	Left	0.24	135°	125°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

C2P50E / Power clamp - NAAMS Std - 50 mm bore

WEIGHT 2.7 kg

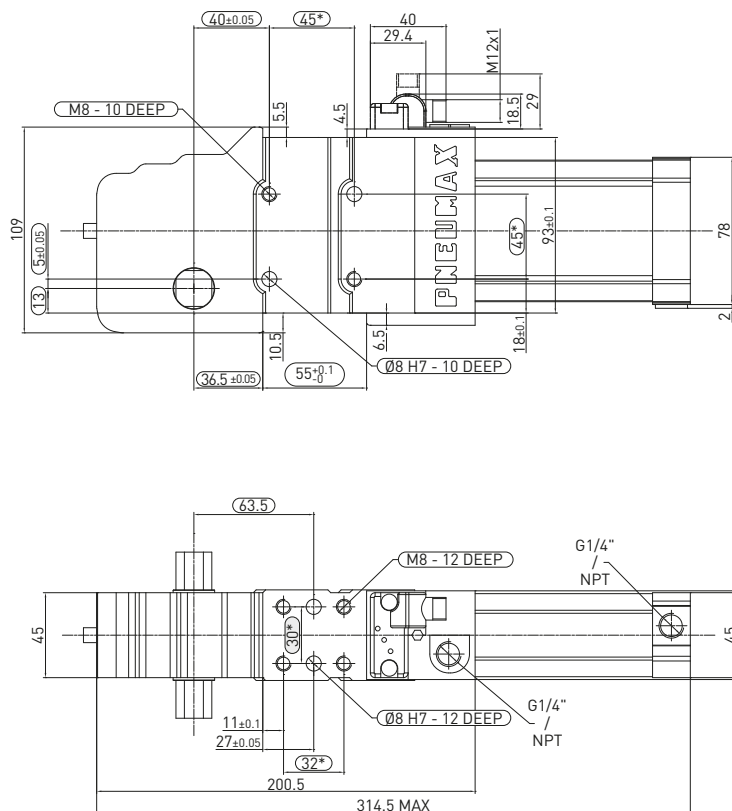

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 01 - 15/05/2016

C2D250E / Power clamp - NAAMS Std - 50 mm bore with manual operation

WEIGHT 3.17 kg

D2 handle included

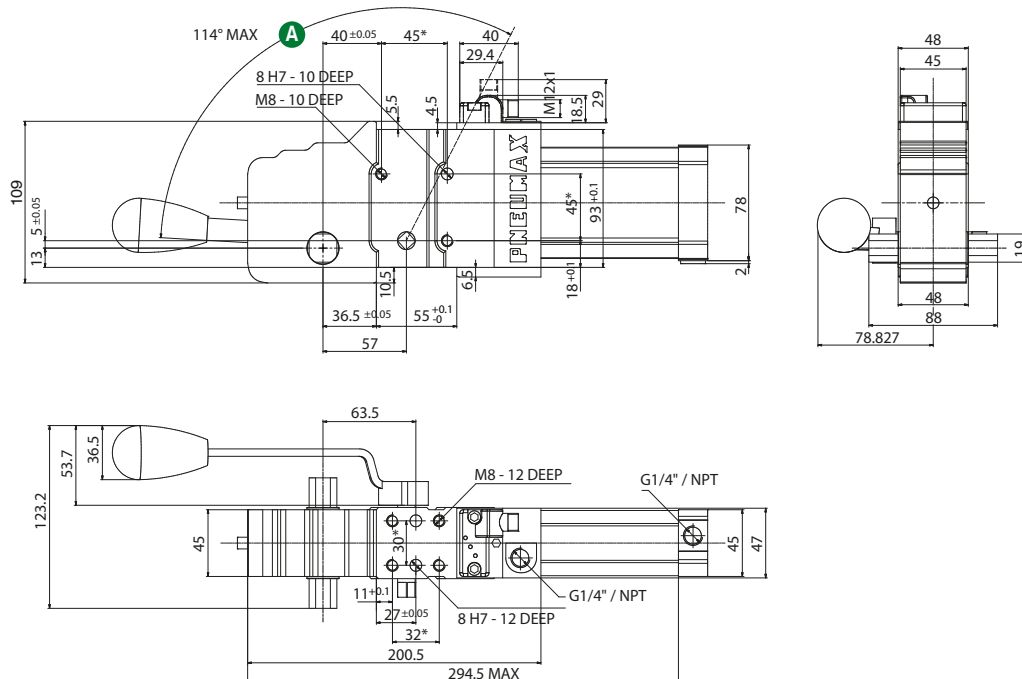

Handle swivel angle

Arm opening angle	Handle swivel angle A
0°	3.25°
15°	27°
30°	43°
45°	59.3°
60°	75.4°
75°	89.75°
90°	101°
105°	109°
120°	114.25°
135°	117.2°

Max Hand Force: 200 N

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 01 - 15/05/2016


Clamping arms / 19 mm shaft - NAAMS Std

REV 03 - 29/03/2019



0 mm OFFSET

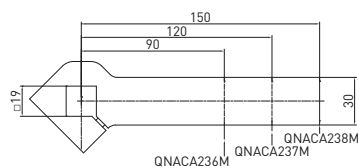

25 mm OFFSET

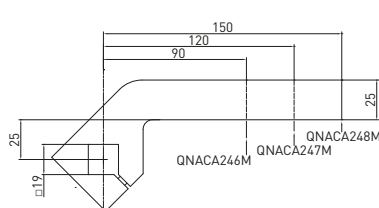

50 mm OFFSET

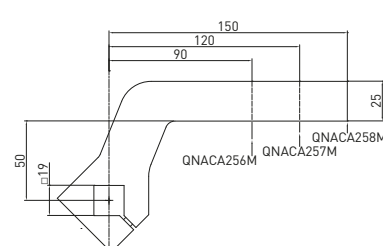

19 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA236M	Steel	90	0.4	135°	135°	135°	135°
QNACA237M	Steel	120	0.49	135°	135°	135°	135°
QNACA238M	Steel	150	0.58	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

19 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA246M	Steel	90	0.44	135°	135°	135°	135°
QNACA247M	Steel	120	0.52	135°	135°	135°	135°
QNACA248M	Steel	150	0.6	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

19 mm shaft – 50 mm offset


Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA256M	Steel	90	0.52	135°	135°	135°	135°
QNACA257M	Steel	120	0.6	135°	135°	135°	135°
QNACA258M	Steel	150	0.68	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft



Clamping arms / 22 mm shaft - NAAMS Std

REV 02 - 29/03/2019

0 mm OFFSET

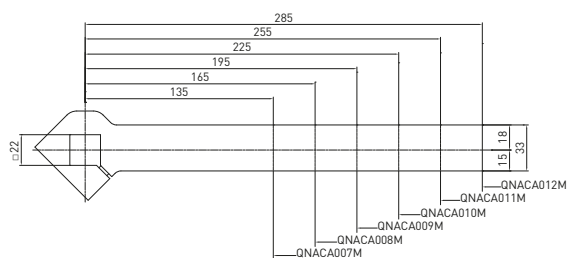

25 mm OFFSET

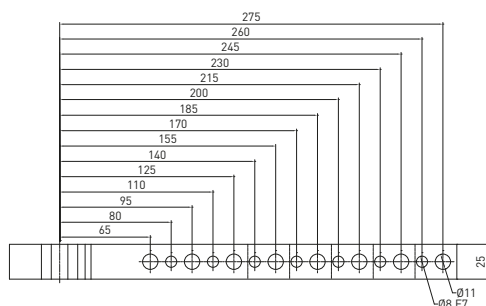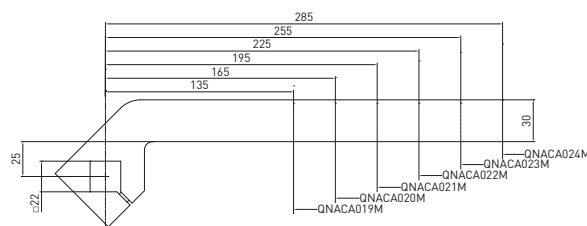

22 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA007M	Steel	135	0.72	135°	135°	135°	135°
QNACA008M	Steel	165	0.83	135°	135°	135°	135°
QNACA009M	Steel	195	0.94	135°	135°	135°	135°
QNACA010M	Steel	225	1.05	135°	135°	135°	135°
QNACA011M	Steel	255	1.16	135°	135°	135°	135°
QNACA012M	Steel	285	1.28	135°	135°	135°	135°



Screws: M8X25 Tightening torque: 25 N m / 18.43 lb ft

22 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA019M	Steel	135	0.84	135°	135°	135°	135°
QNACA020M	Steel	165	0.95	135°	135°	135°	135°
QNACA021M	Steel	195	1.05	135°	135°	135°	135°
QNACA022M	Steel	225	1.16	135°	135°	135°	135°
QNACA023M	Steel	255	1.26	135°	135°	135°	135°
QNACA024M	Steel	285	1.37	135°	135°	135°	135°

Screws: M8X25 Tightening torque: 25 N m / 18.43 lb ft

Clamping arms / 22 mm shaft - NAAMS Std

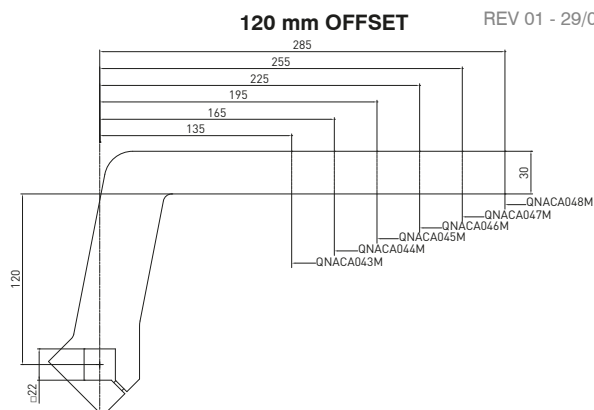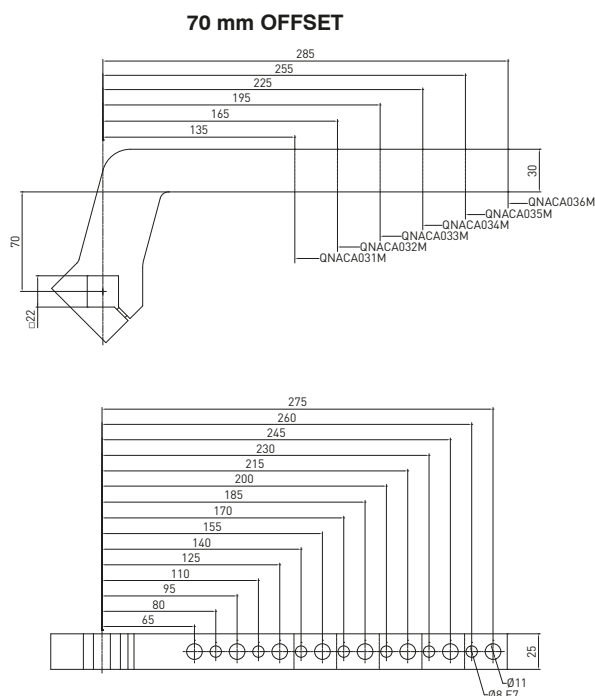

REV 01 - 29/03/2019

CLAMPING

22 mm shaft – 70 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNA031M	Stahl	135	1.05	135°	135°	135°	135°
QNA032M	Stahl	165	1.16	135°	135°	135°	135°
QNA033M	Stahl	195	1.27	135°	135°	135°	135°
QNA034M	Stahl	225	1.38	135°	135°	135°	135°
QNA035M	Stahl	255	1.49	135°	135°	135°	135°
QNA036M	Stahl	285	1.6	135°	135°	135°	135°

Screws: M8X25 Tightening torque: 25 N m / 18.43 lb ft


22 mm shaft – 120 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNA043M	Stahl	135	1.27	135°	135°	135°
QNA044M	Stahl	165	1.37	135°	135°	135°
QNA045M	Stahl	195	1.48	135°	135°	135°
QNA046M	Stahl	225	1.58	135°	135°	135°
QNA047M	Stahl	255	1.69	135°	135°	135°
QNA048M	Stahl	285	1.8	135°	135°	135°

Screws: M8X25 Tightening torque: 25 N m / 18.43 lb ft

C2P80E / Power clamp - NAAMS Std - 80 mm bore

WEIGHT 8.75 kg

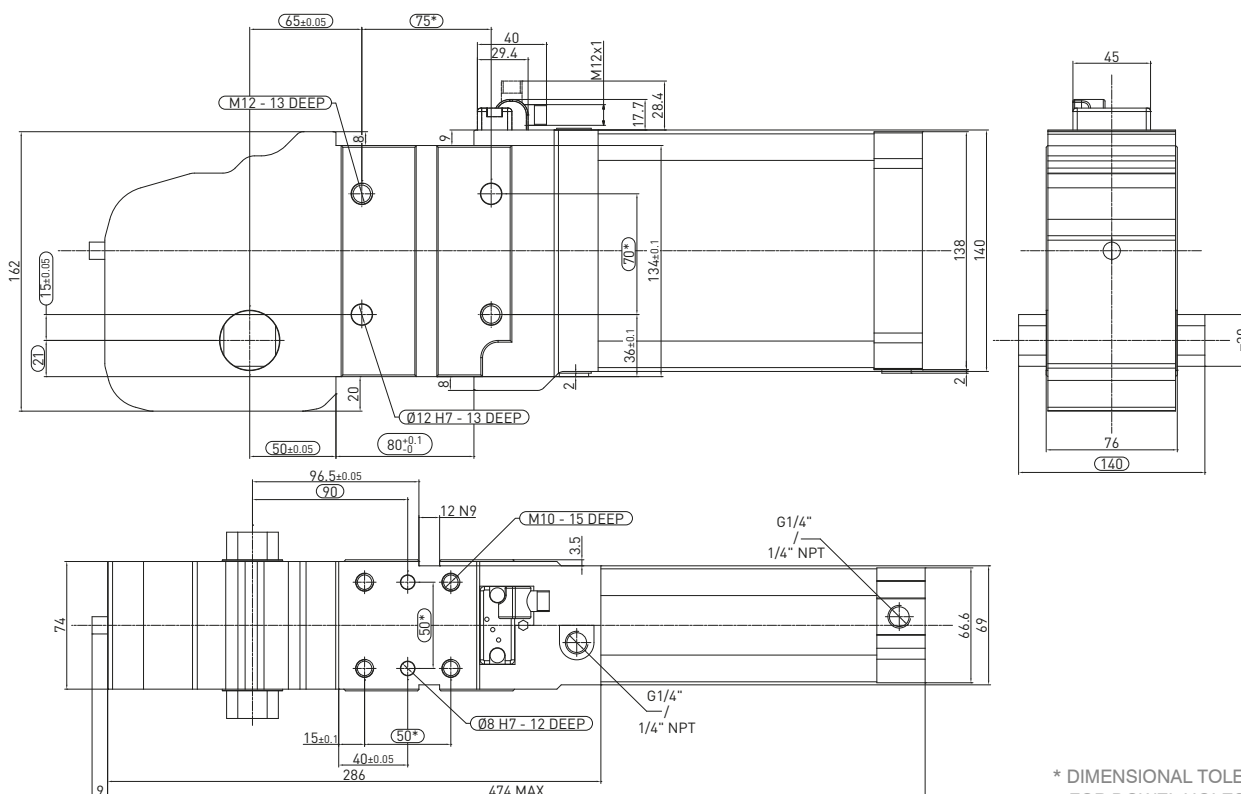

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 31/07/2015

C2D280E / Power clamp - NAAMS Std - 80 mm bore with manual operation

WEIGHT 9.8 kg

D2 handle included

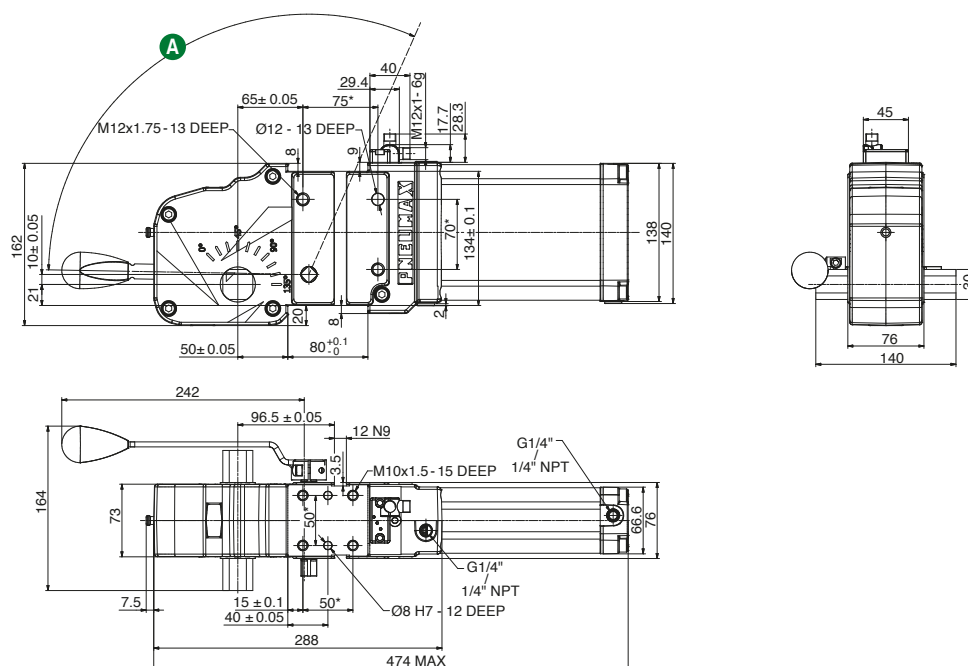

Handle swivel angle

Arm opening angle	Handle swivel angle A
0°	3°
15°	22°
30°	36°
45°	51.3°
60°	68°
75°	84.2°
90°	98°
105°	108°
120°	115°
135°	119°

Max Hand Force: 200 N

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV.00 - 29/01/2024



Clamping arms / 30 mm shaft - NAAMS Std

REV.04 - 28/06/2024

0 mm OFFSET

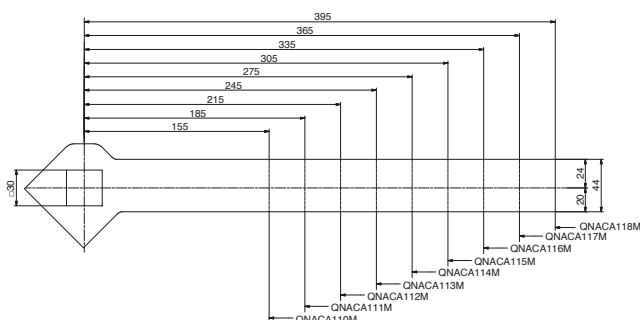

25 mm OFFSET

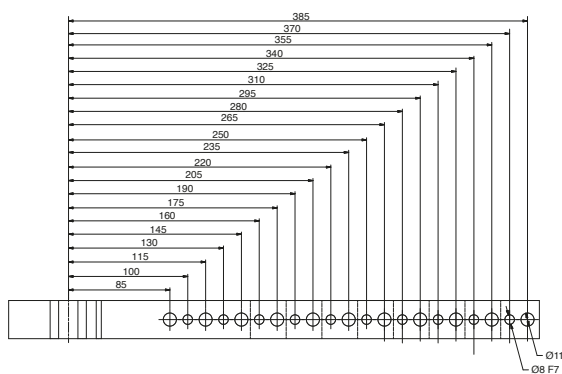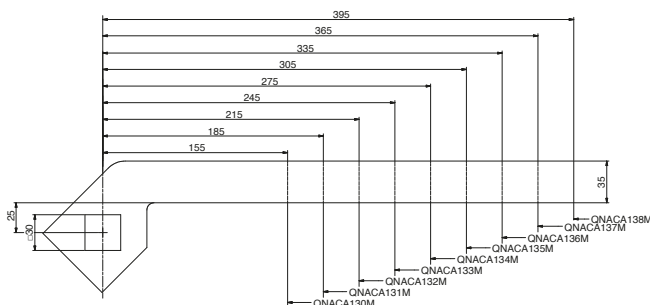

30 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA110M	Steel	155	1.41	135°	135°	135°	135°
QNACA111M	Steel	185	1.58	135°	135°	135°	135°
QNACA112M	Steel	215	1.76	135°	135°	135°	135°
QNACA113M	Steel	245	1.93	135°	135°	135°	135°
QNACA114M	Steel	275	2.1	135°	135°	135°	135°
QNACA115M	Steel	305	2.27	135°	135°	135°	135°
QNACA116M	Steel	335	2.45	135°	135°	135°	135°
QNACA117M	Steel	365	2.62	135°	135°	135°	135°
QNACA118M	Steel	395	2.8	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

30 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA130M	Steel	155	1.24	135°	135°	135°	135°
QNACA131M	Steel	185	1.39	135°	135°	135°	135°
QNACA132M	Steel	215	1.54	135°	135°	135°	135°
QNACA133M	Steel	245	1.69	135°	135°	135°	135°
QNACA134M	Steel	275	1.84	135°	135°	135°	135°
QNACA135M	Steel	305	2	135°	135°	135°	135°
QNACA136M	Steel	335	2.14	135°	135°	135°	135°
QNACA137M	Steel	365	2.29	135°	135°	135°	135°
QNACA138M	Steel	395	2.45	135°	135°	135°	135°




Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

Clamping arms / 30 mm shaft - NAAMS Std

REV.04 - 28/06/2024

70 mm OFFSET

120 mm OFFSET

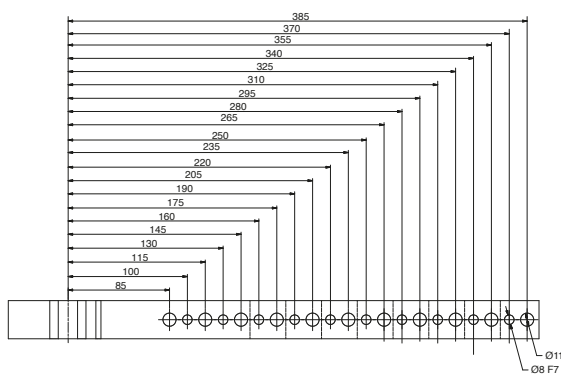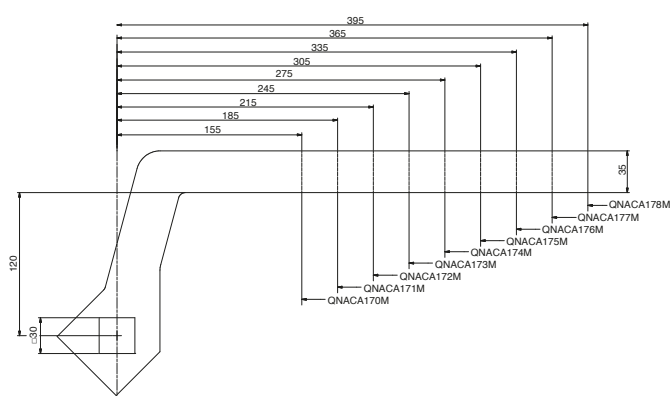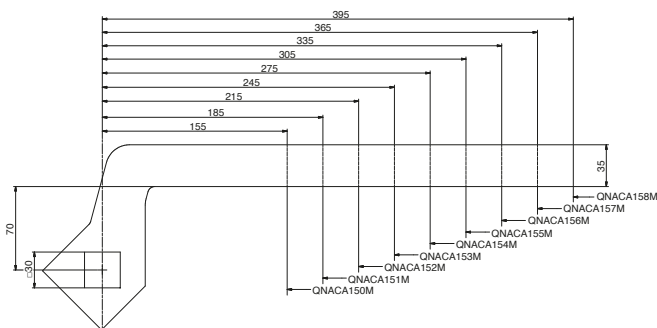

30 mm shaft – 70 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA150M	Steel	155	1.7	135°	135°	135°	135°
QNACA151M	Steel	185	1.85	135°	135°	135°	135°
QNACA152M	Steel	215	2	135°	135°	135°	135°
QNACA153M	Steel	245	2.15	135°	135°	135°	135°
QNACA154M	Steel	275	2.3	135°	135°	135°	135°
QNACA155M	Steel	305	2.45	135°	135°	135°	135°
QNACA156M	Steel	335	2.6	135°	135°	135°	135°
QNACA157M	Steel	365	2.76	135°	135°	135°	135°
QNACA158M	Steel	395	2.92	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft


30 mm shaft – 120 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA170M	Steel	155	1.97	135°	135°	135°	135°
QNACA171M	Steel	185	2.12	135°	135°	135°	135°
QNACA172M	Steel	215	2.27	135°	135°	135°	135°
QNACA173M	Steel	245	2.42	135°	135°	135°	135°
QNACA174M	Steel	275	2.57	135°	135°	135°	135°
QNACA175M	Steel	305	2.72	135°	135°	135°	135°
QNACA176M	Steel	335	2.87	135°	135°	135°	135°
QNACA177M	Steel	365	3.02	135°	135°	135°	135°
QNACA178M	Steel	395	3.19	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

C3 and C4-Series

INTERNATIONAL
MOUNT 

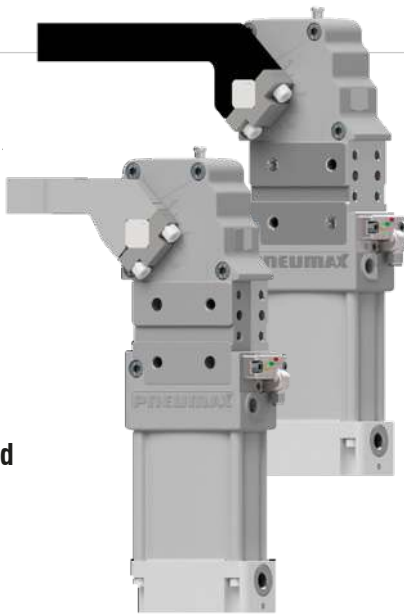

Patented

New integrated hold open device

It securely holds the clamp in its open position in case of air loss

The new integrated hold open device is a reliable solution even for applications with considerable **axial load** on the **clamping arm**.

It allows for a smooth and controlled restart of the cycle.

Compact overall dimensions.

Available for all clamps' mountings (logo International mount and logo NAAMS). Protection against external impacts, dust and welding debris.

CLAMPING

Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features


Operating pressure	from 3 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required
High retention	make sure to supply air to the opposite side of the cylinder before switching the valve

Functional charts

Size 40 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

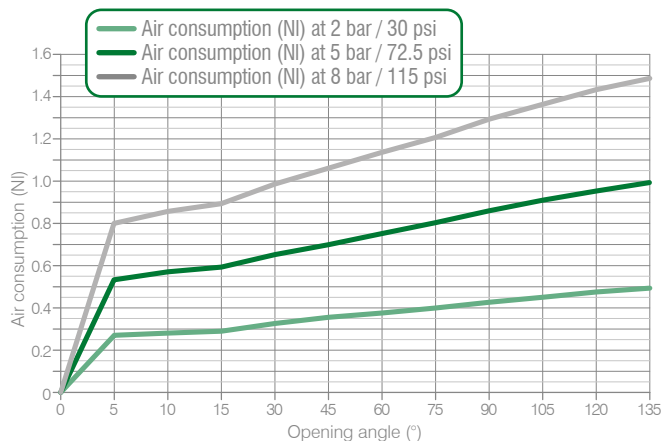

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

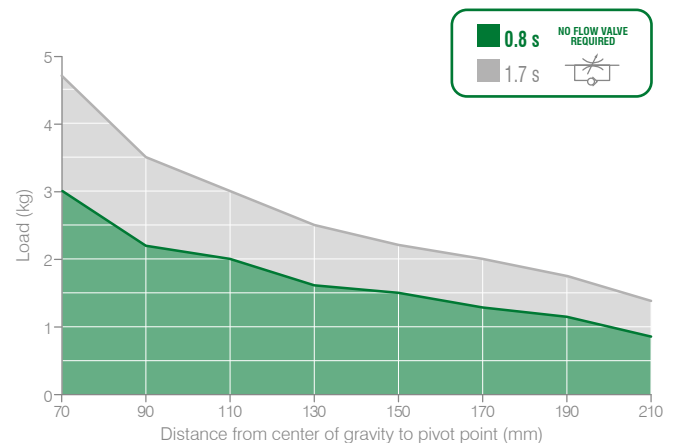

- **Clamping moment (at 5 bar / 72.5 psi)**
130 N m / 95,88 lb-ft

- **Holding moment**
380 N m / 280,27 lb-ft


The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

C3 and C4-Series / Functional charts (continued)

Series 45 - size 40 interchangeable to size 50 and 63 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 16/06/2015

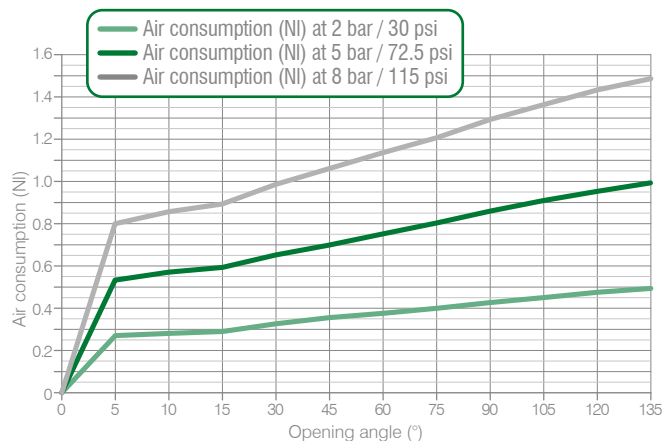

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 16/06/2015

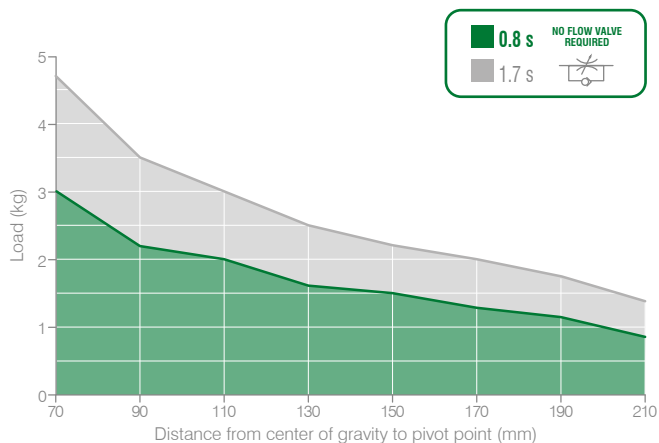

• Clamping moment (at 5 bar / 72.5 psi)

130 N m / 95,88 lb·ft

• Holding moment


380 N m / 280,25 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

Size 50 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 16/06/2015

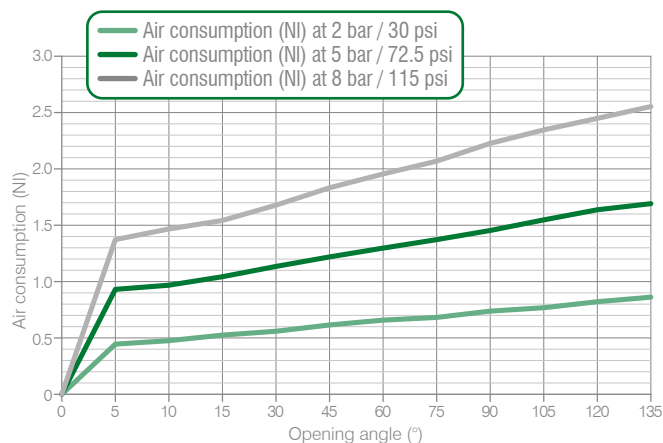

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 16/06/2015

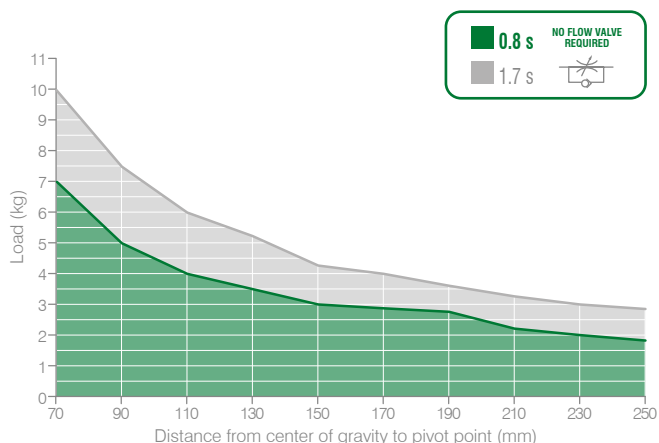

• Clamping moment (at 5 bar / 72.5 psi)

185 N m / 136,44 lb·ft

• Holding moment

800 N m / 590,04 lb·ft


The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

C3 and C4-Series / Functional charts (continued)

Size 63 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

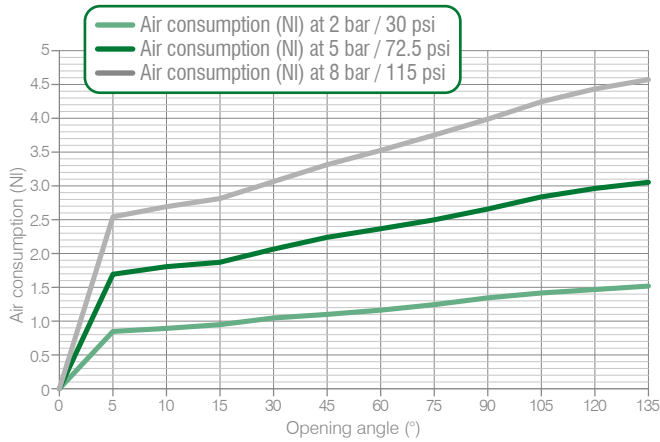

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

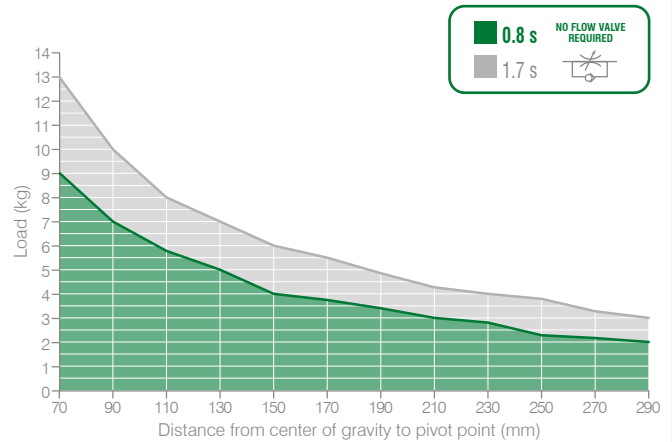

• Clamping moment (at 5 bar / 72.5 psi)

390 N m / 287,64 lb·ft

• Holding moment


1.500 N m / 1.106,34 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

Size 80 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 29/05/2015

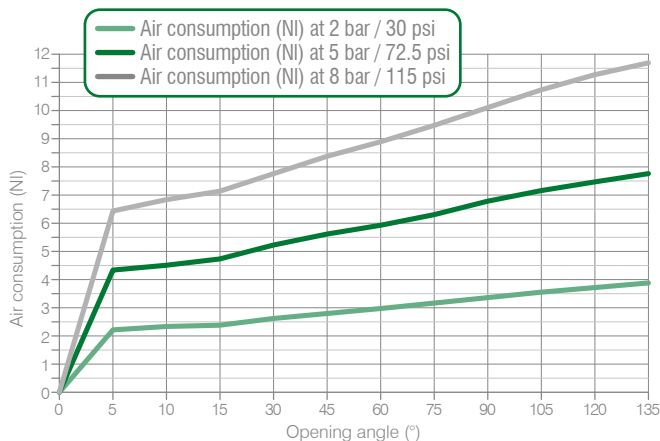

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 29/05/2016

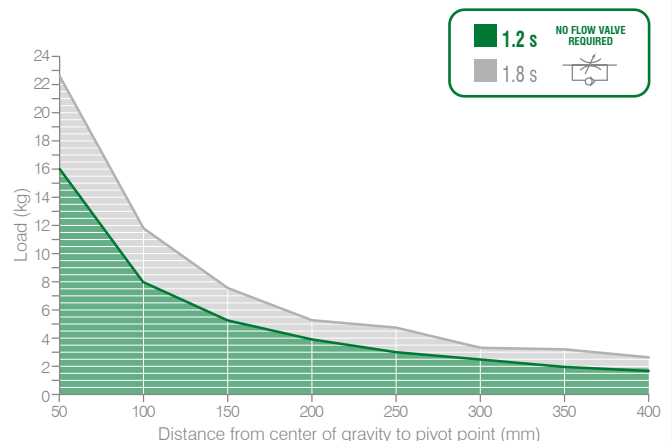

• Clamping moment (at 5 bar / 72.5 psi)

850 N m / 626,92 lb·ft

• Holding moment

2.500 N m / 1.843,90 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

C3 and C4-Series / Ordering string

Please see the charts in the datasheets for arm position as well as for max. opening angle

C3-Series
C 3 P 40 E G 4 A 01



C	VERSION	C = clamp
3	MOUNTING PATTERN	3 = International mount with integrated hold-open device
P	OPERATION	P = pneumatic
40	SIZE	40 = Ø 40 mm 45 = Ø 40 mm with interchangeable to size 50 and 63 mm 50 = Ø 50 mm 63 = Ø 63 mm 80 = Ø 80 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP N = NPT
4	ARM MOUNT	1 =  2 =  3 =  4 = 
A	ARM MATERIAL	A = aluminum S = steel
01	CLAMP ARM TYPE	01 = wishbone, central, 15 mm offset* 04 = wishbone, central, 45 mm offset 02 = wishbone, right, 15 mm offset* 05 = wishbone, right, 45 mm offset 03 = wishbone, left, 15 mm offset* 06 = wishbone, left, 45 mm offset

* for size 80 mm = 20 mm offset


C4-Series
C 4 P 50 E N L

C	VERSION	C = clamp
4	MOUNTING PATTERN	4 = NAAMS Standard with integrated hold-open device 
P	OPERATION	P = pneumatic
50	SIZE	50 = Ø 50 mm 63 = Ø 63 mm 80 = Ø 80 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
N	PORTS	G = G thread – BSPP N = NPT
L	SHAFT OUTPUT	= dual output L = single output - LEFT R = single output - RIGHT



 NAAMS clamping arms to be ordered separately
 Please see the charts in the datasheets
 for arm position as well as for max. opening angle

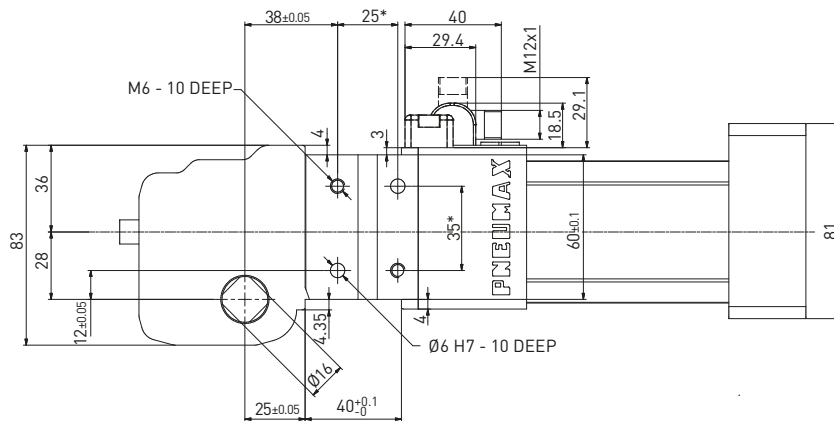C3P40E / Power clamp - International mount with integrated hold-open device - 40 mm bore**WEIGHT 3.5 kg**


for clamping arms, please see C1 series

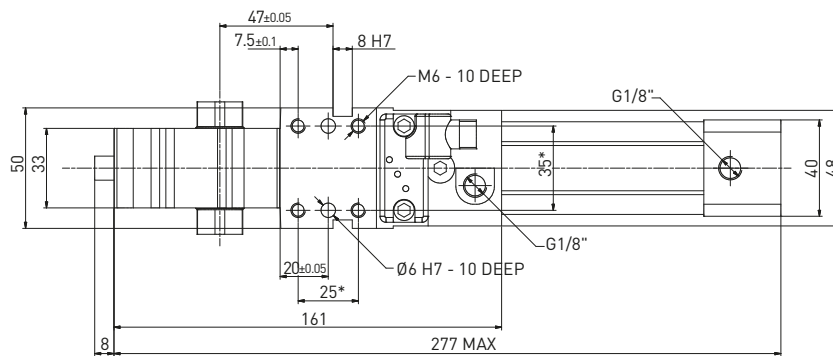* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1




REV. 00 - 27/07/2022

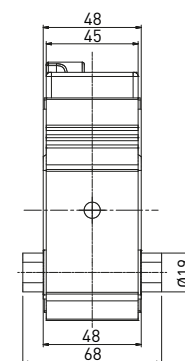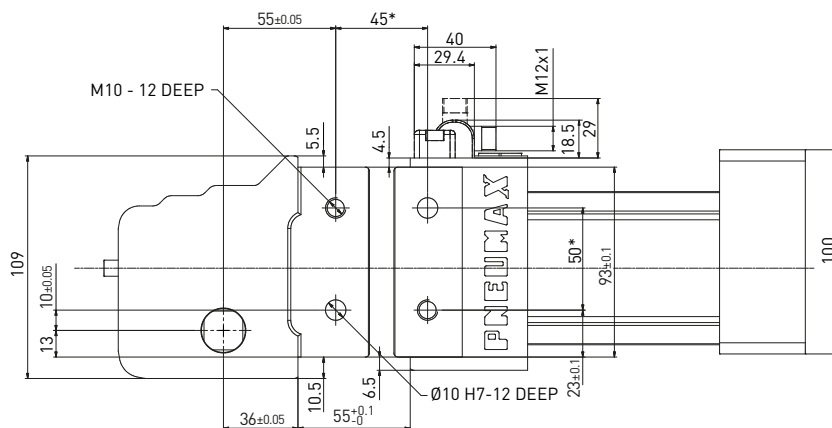C3P50E / Power clamp - International mount with integrated hold-open device - 50 mm bore**WEIGHT 4 kg**

for clamping arms, please see C1 series

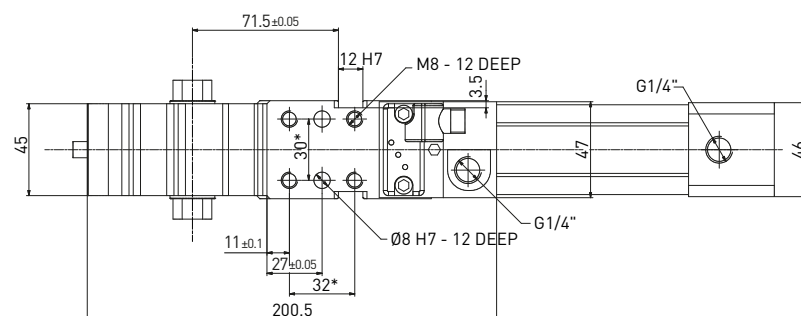* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 22/07/2022

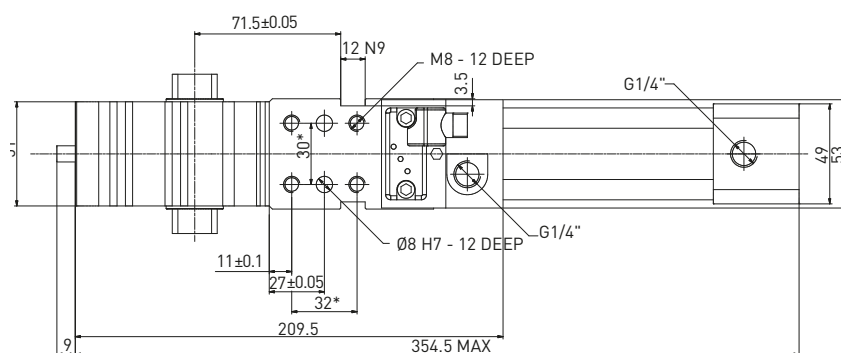
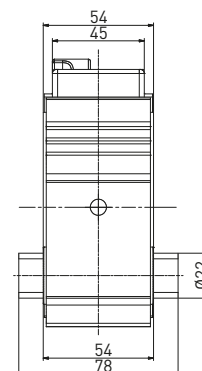
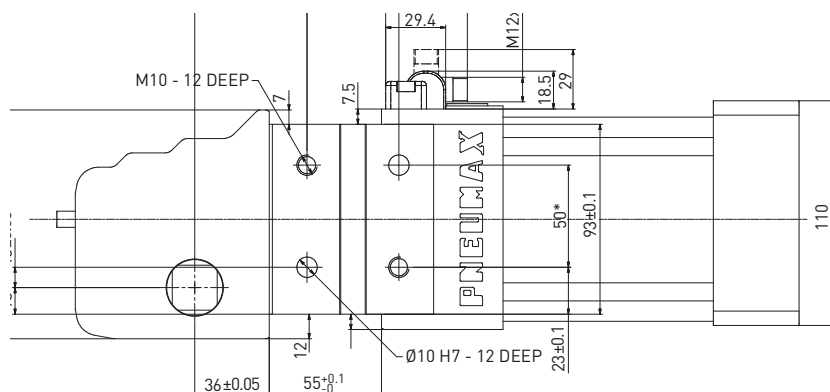
C3P63E / Power clamp - International mount with integrated hold-open device - 63 mm bore
WEIGHT 3.5 kg


for clamping arms, please see C1 series

 * DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02

 DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 27/07/2022

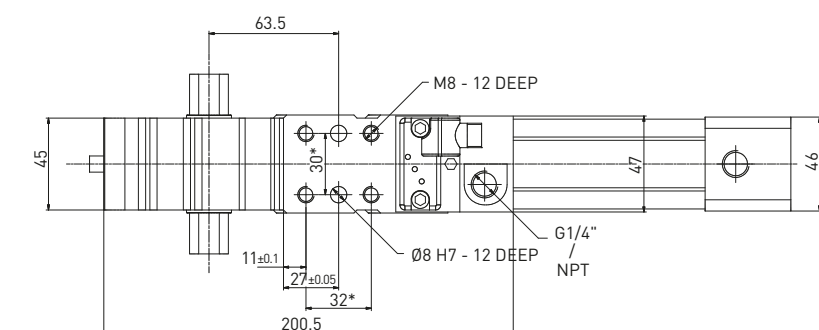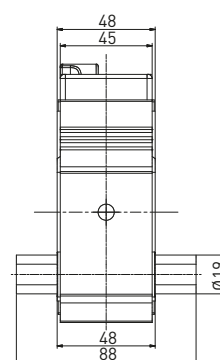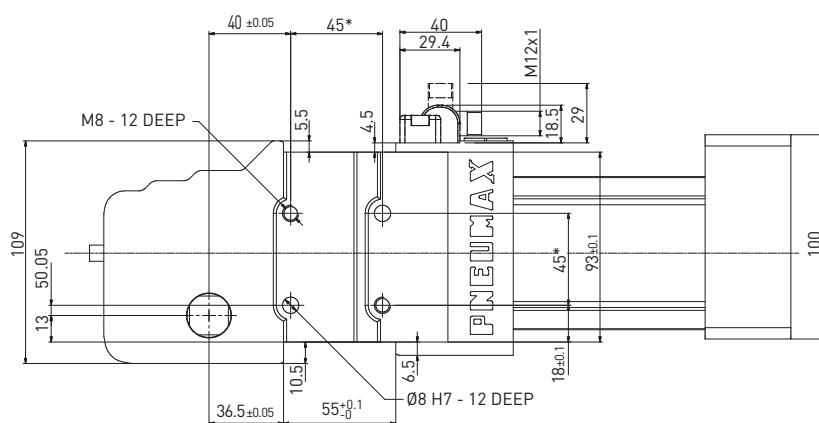C4P50E / Power clamp - NAAMS Standard with integrated hold-open device - 50 mm bore
WEIGHT 4 kg


for clamping arms, please see C2 series



 * DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02

 DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 27/07/2022

C4P63E / Power clamp - NAAMS Standard with integrated hold-open device - 63 mm bore

WEIGHT 3.5 kg

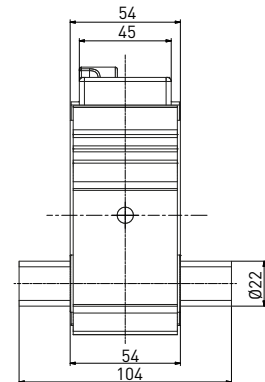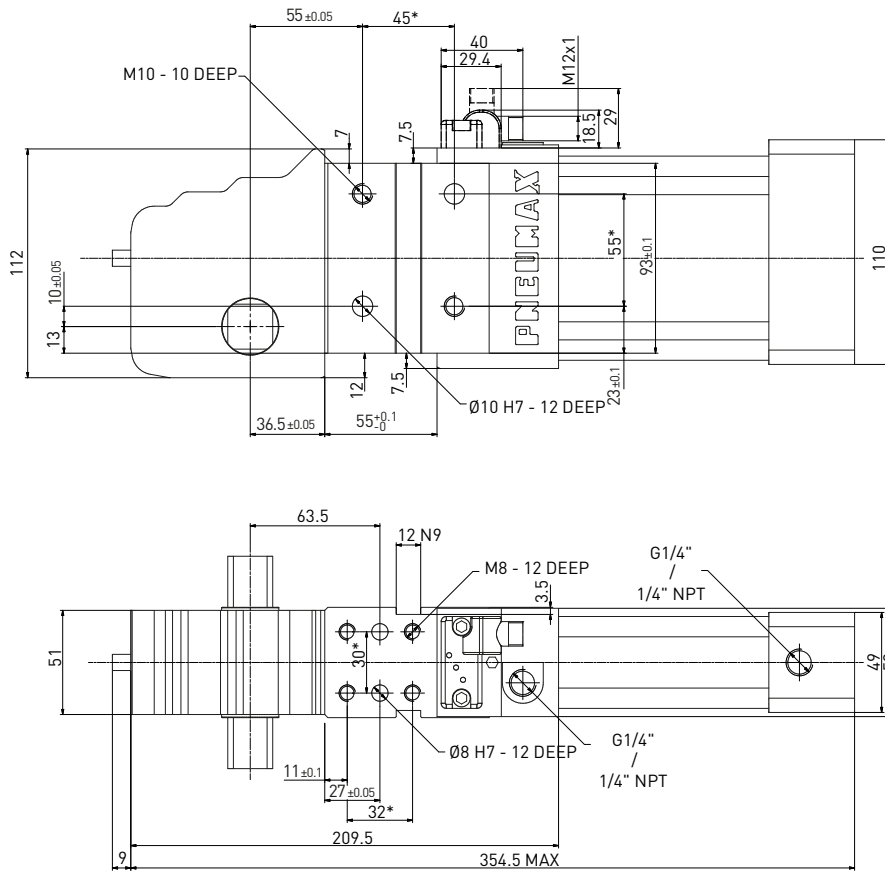

for clamping arms, please see C2 series

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 27/07/2022

Integrated mechanism





Without air, a spring pushes a steel locking ring in a groove machined in the piston rod termination and prevents it from moving.

On the opposite side, a pneumatic piston, when activated, pushes the steel locking ring and releases the piston.

SINGLE EFFECT



Patented

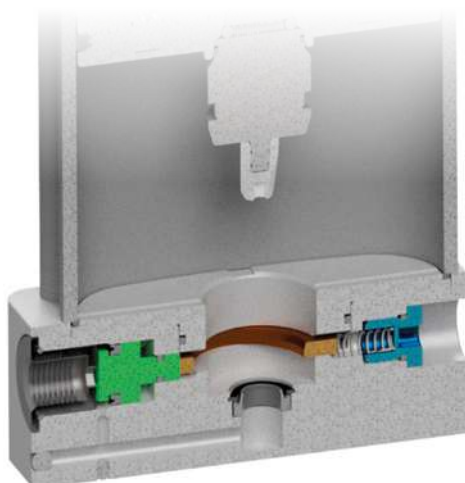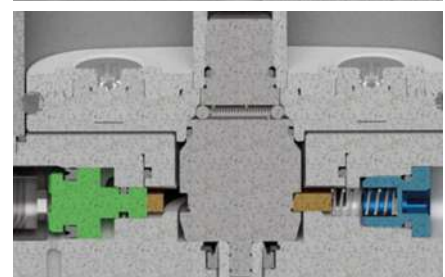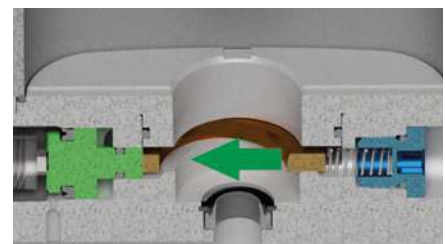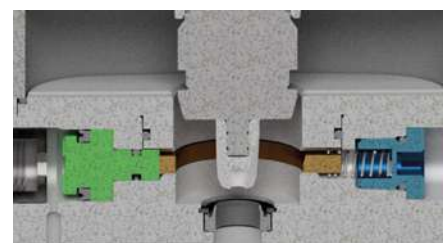**LOCKING****RELEASE**

HE1-Series

High Efficiency power clamps International mount

INTERNATIONAL
MOUNT



Patented

Air consumption saving up to 41%

The perfect combination between **functionality** and **efficiency**: same clamping moment, same holding moment, same overall and functional dimensions, same load capacity of a standard clamp with International and NAAMS mounts available.

Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features


Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

HE1P0E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 21/01/2016

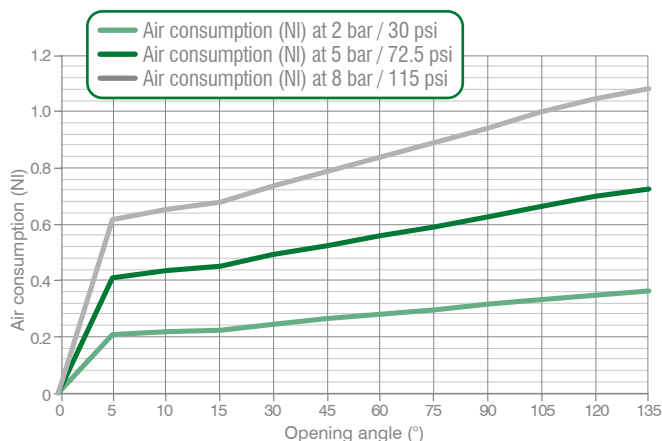

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

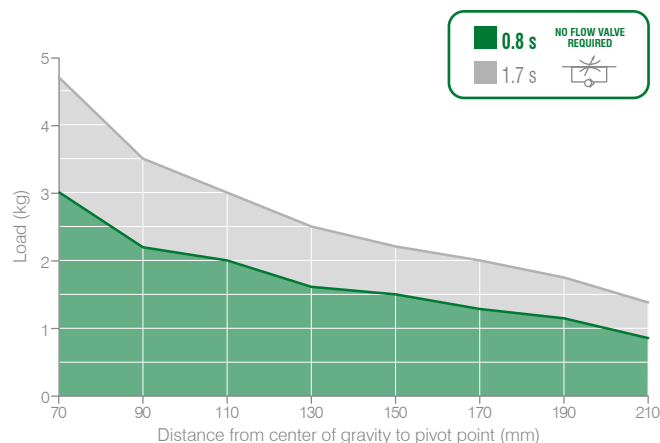

• Clamping moment (at 5 bar / 72.5 psi) **130 N m / 95,88 lb·ft**


• Holding moment **380 N m / 280,27 lb·ft**

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

HE1P1E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 31/03/2015

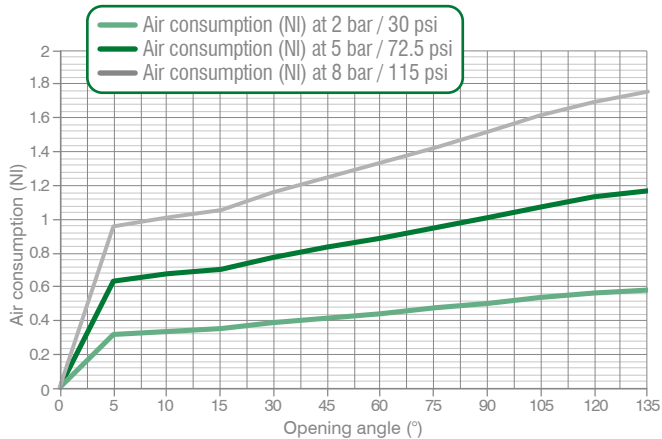

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

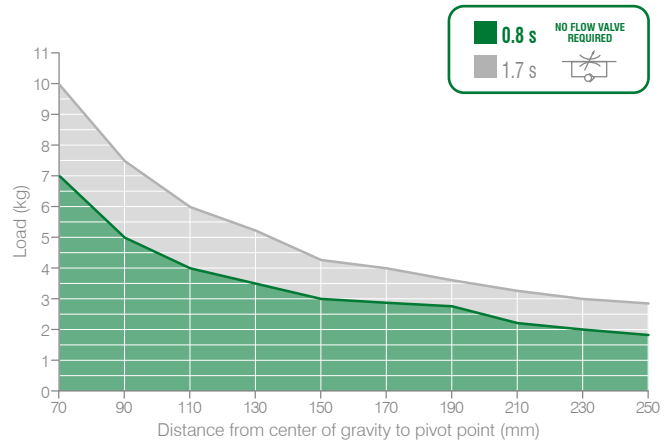

• Clamping moment (at 5 bar / 72.5 psi)

185 N m / 136,44 lb·ft

• Holding moment


800 N m / 590,04 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

HE1P2E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 31/03/2015

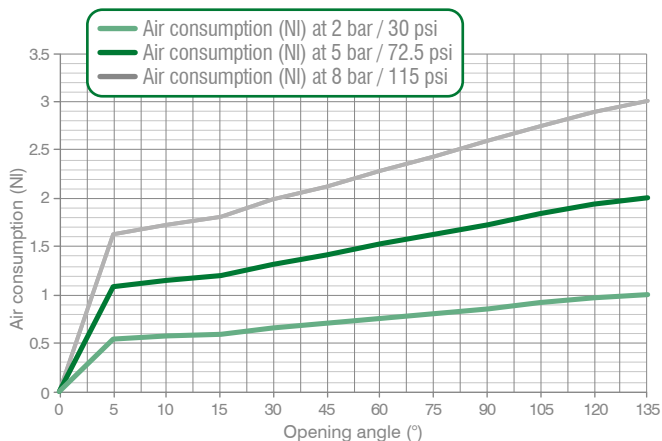

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

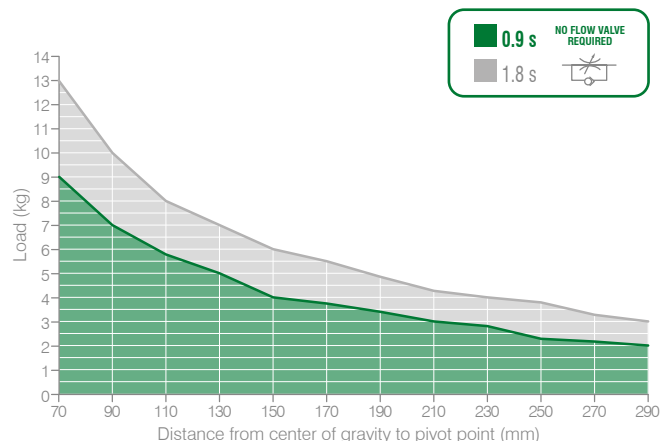

• Clamping moment (at 5 bar / 72.5 psi)

390 N m / 287,64 lb·ft

• Holding moment

1500 N m / 1.106,34 lb·ft


The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

HE1-Series / Functional charts (continued)

HE1P3E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 01 - 17/09/2024

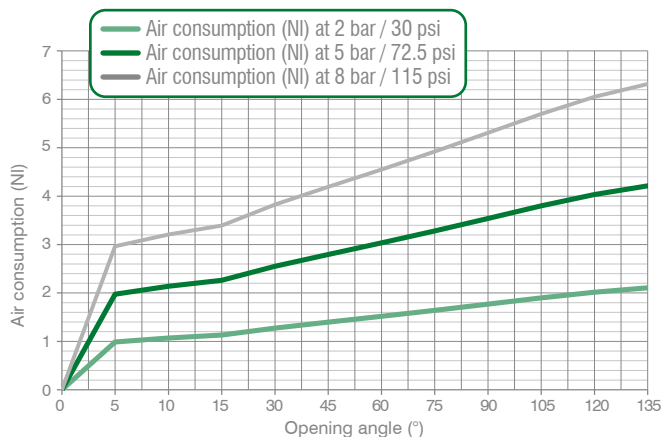

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

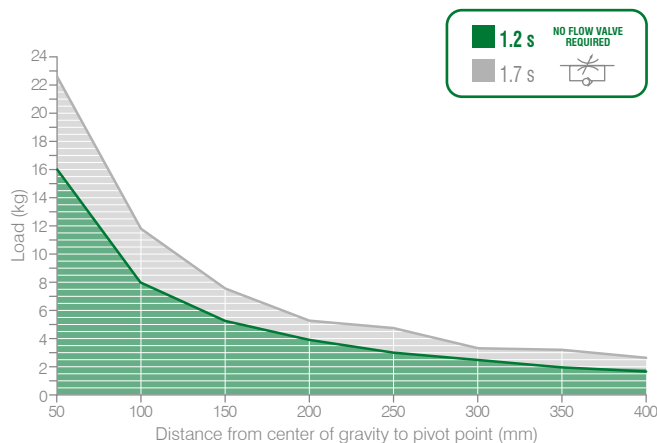

• Clamping moment (at 5 bar / 72.5 psi)

850 N m / 626,92 lb·ft

• Holding moment


2500 N m / 1843,90 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

HE1P4E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 21/01/2016

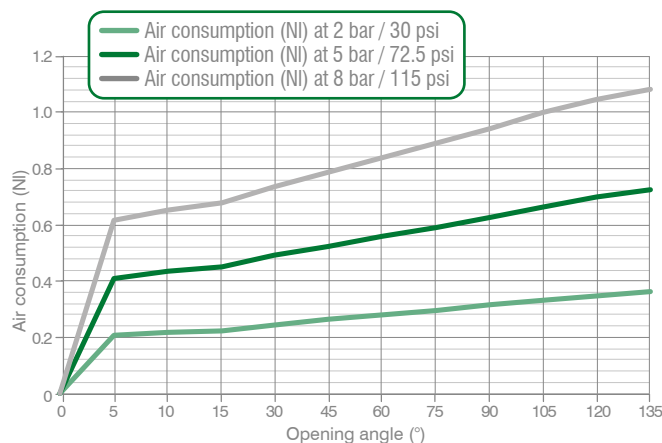

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

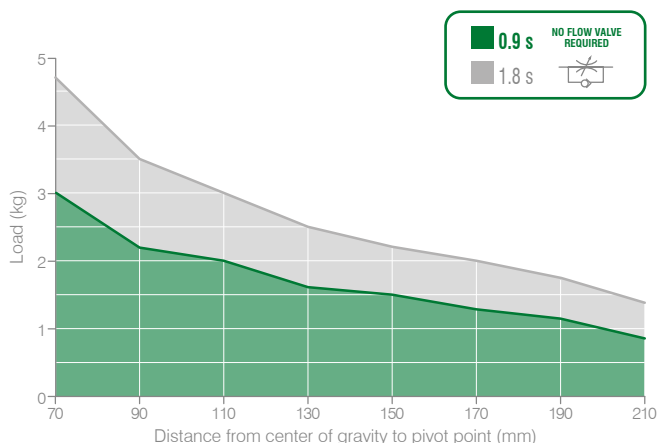

• Clamping moment (at 5 bar / 72.5 psi)

130 N m / 95,88 lb·ft

• Holding moment

380 N m / 280,27 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

Ordering string

HE1-Series

HE 1 P 1 E G 1 A 01

HE	VERSION	HE = high efficiency clamp	
1	MOUNTING PATTERN	1 = International mount	
P	OPERATION	P = pneumatic	
1	SIZE	0 = housing size 40 / cylinder Ø 32 mm 5 = housing size 50 / cylinder Ø 40 mm 1 = housing size 50 / cylinder Ø 40 mm NAAMS shaft (20 mm) 2 = housing size 63 / cylinder Ø 50 mm 6 = housing size 63 / cylinder Ø 50 mm 3 = housing size 80 / cylinder Ø 63 mm NAAMS shaft (25 mm)	
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP	
G	PORTS	G = G thread – BSPP N = NPT	
1	ARM MOUNT	1 =  2 =  3 =  4 = 	
A	ARM MATERIAL	A = aluminum S = steel	
01	CLAMP ARM TYPE	01 = wishbone, central, 15 mm offset* 04 = wishbone, central, 45 mm offset 02 = wishbone, right, 15 mm offset* 05 = wishbone, right, 45 mm offset 03 = wishbone, left, 15 mm offset* 06 = wishbone, left, 45 mm offset	


* for size 80 mm > 20 mm offset

HE1-Series

HE 1 P 4 E G 1 A 54

HE	VERSION	HE = high efficiency clamp	
1	MOUNTING PATTERN	1 = International mount	
P	OPERATION	P = pneumatic	
4	SIZE	4 = housing size 40 / cylinder Ø 32 mm Mounting pattern interchangeable to 50 and 63 mm bore clamps	
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP	
G	PORTS	G = G thread – BSPP N = NPT	
1	ARM MOUNT	1 =  2 =  3 =  4 = 	
A	ARM MATERIAL	A = aluminum	
54	CLAMP ARM TYPE	54 = wishbone, central, 45 mm offset 55 = wishbone, right, 45 mm offset 56 = wishbone, left, 45 mm offset	

HE1P0E / High Efficiency clamp - International mount - Housing size 40 / cylinder Ø 32 mm

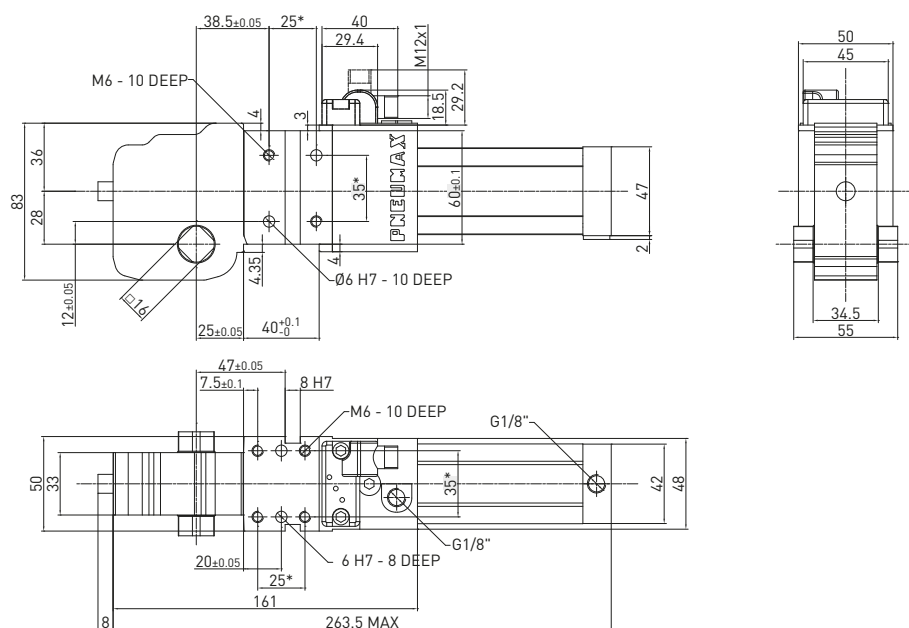WEIGHT 1.36 kg


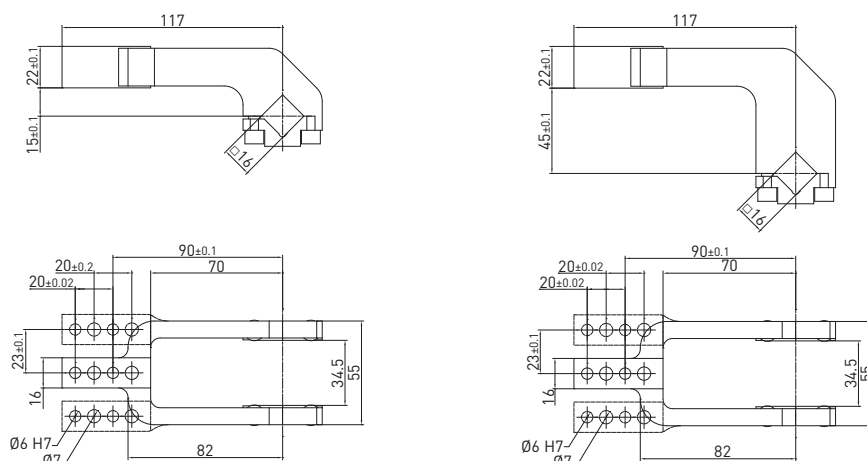
* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 02/10/2015

Clamping arms / 16 mm shaft for clamps' size 40 mm

REV. 02 - 07/10/2015



16 mm shaft – 15 mm offset


Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1601	Aluminum	Central	0.24	135°	135°	N/A	45°
Q1601	Steel	Central	0.44	135°	135°	N/A	45°
B1602	Aluminum	Right	0.24	135°	135°	N/A	45°
Q1602	Steel	Right	0.46	135°	135°	N/A	45°
B1603	Aluminum	Left	0.24	135°	135°	N/A	45°
Q1603	Steel	Left	0.46	135°	135°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

16 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1604	Aluminum	Central	0.3	135°	135°	N/A	45°
Q1604	Steel	Central	0.55	135°	135°	N/A	45°
B1605	Aluminum	Right	0.3	135°	135°	N/A	45°
Q1605	Steel	Right	0.57	135°	135°	N/A	45°
B1606	Aluminum	Left	0.3	135°	135°	N/A	45°
Q1606	Steel	Left	0.57	135°	135°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

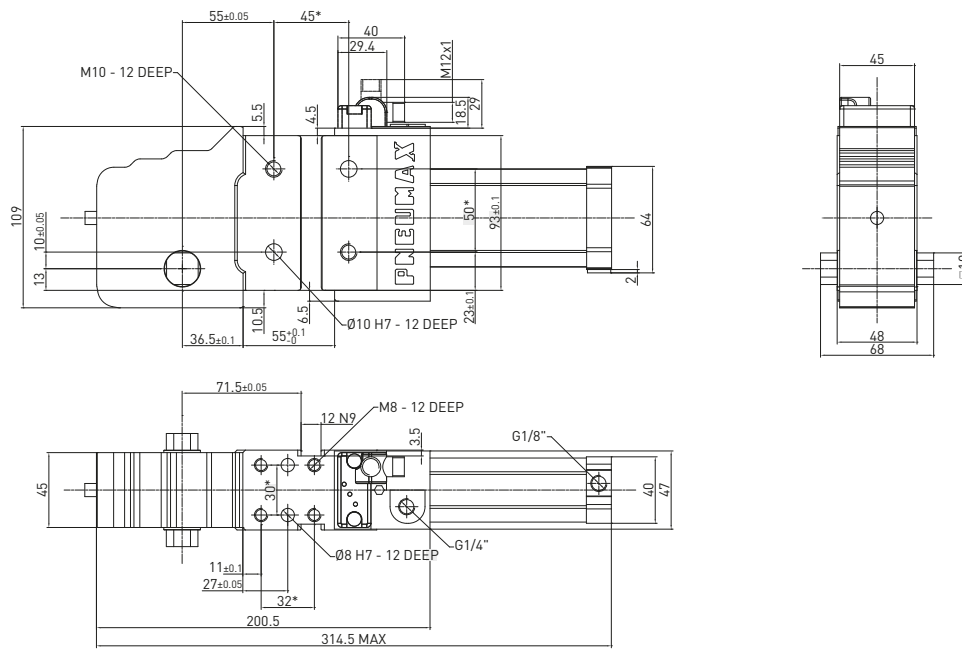
HE1P1E / High Efficiency clamp - International mount - Housing size 50 / cylinder Ø 40 mm
WEIGHT 2.53 kg

 * DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

 DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 02 - 29/03/2019

Clamping arms / 19 mm shaft for clamps' size 50 mm

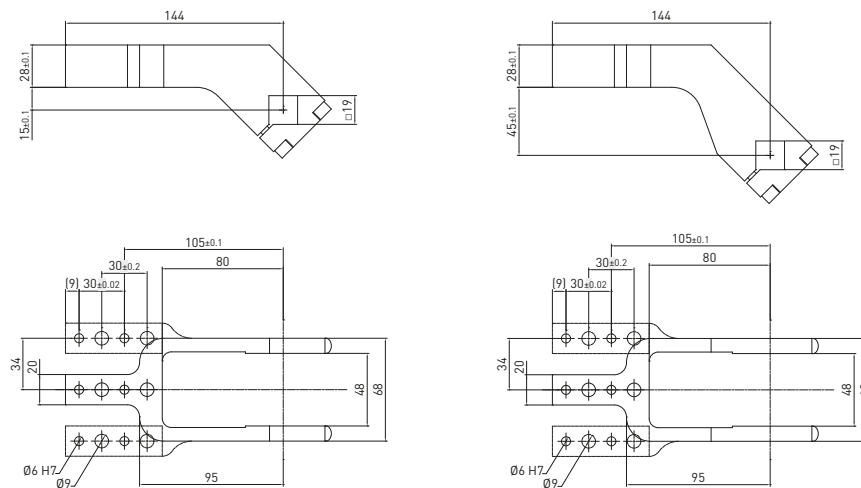REV. 01 - 08/02/2019


19 mm shaft – 15 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1901	Aluminum	Central	0.41	135°	115°	135°	80°
Q1901	Steel	Central	0.71	135°	115°	135°	80°
B1902	Aluminum	Right	0.43	135°	115°	135°	80°
Q1902	Steel	Right	0.79	135°	115°	135°	80°
B1903	Aluminum	Left	0.43	135°	115°	135°	80°
Q1903	Steel	Left	0.79	135°	115°	135°	80°


Screws: M6x25 Tightening torque: 10 N m

19 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1904	Aluminum	Central	0.45	135°	135°	135°	80°
Q1904	Steel	Central	0.77	135°	135°	135°	80°
B1905	Aluminum	Right	0.46	135°	135°	135°	80°
Q1905	Steel	Right	0.81	135°	135°	135°	80°
B1906	Aluminum	Left	0.46	135°	135°	135°	80°
Q1906	Steel	Left	0.81	135°	135°	135°	80°

Screws: M6x25 Tightening torque: 10 N m

HE1P2E / High Efficiency clamp - International mount - Housing size 63 / cylinder Ø 50 mm

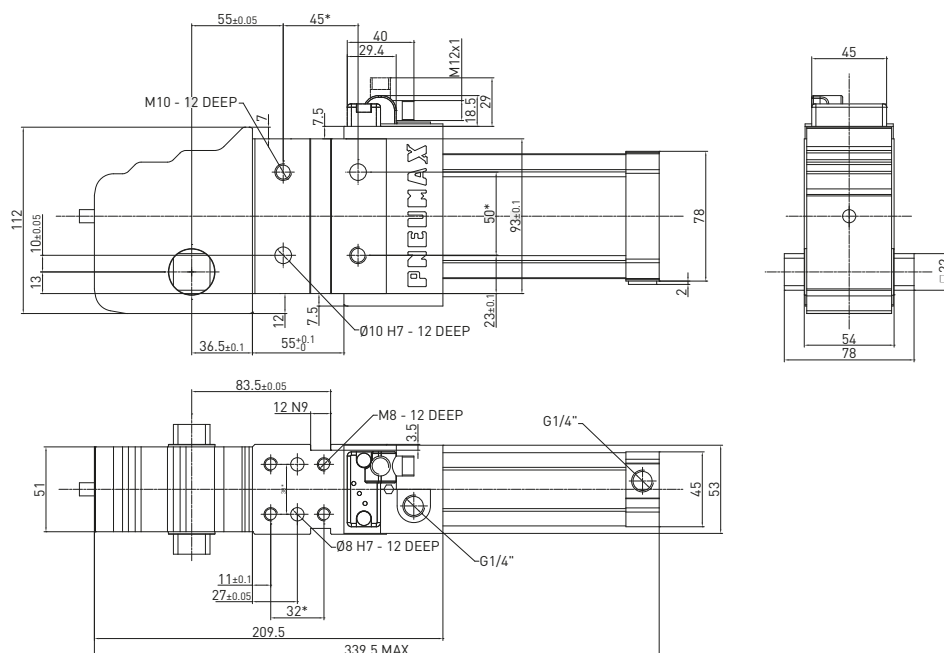WEIGHT 3.3 kg


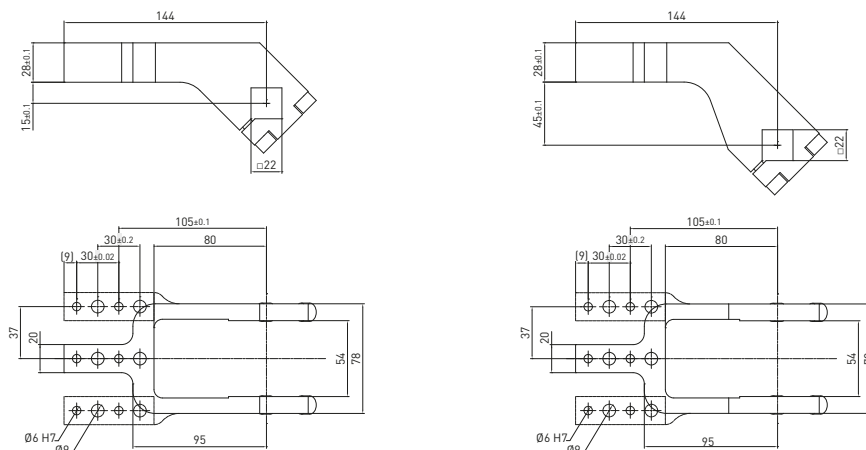
* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 31/03/2015

Clamping arms / 22 mm shaft

REV. 01 - 08/02/2019



22 mm shaft – 15 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B2201	Aluminum	Central	0.52	135°	115°	135°	80°
Q2201	Steel	Central	0.9	135°	115°	135°	80°
B2202	Aluminum	Right	0.54	135°	115°	135°	80°
Q2202	Steel	Right	0.93	135°	115°	135°	80°
B2203	Aluminum	Left	0.54	135°	115°	135°	80°
Q2203	Steel	Left	0.93	135°	115°	135°	80°

Screws: M8x25 Tightening torque: 25 N m


22 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B2204	Aluminum	Central	0.57	135°	135°	135°	75°
Q2204	Steel	Central	0.98	135°	135°	135°	75°
B2205	Aluminum	Right	0.58	135°	135°	135°	75°
Q2205	Steel	Right	1.02	135°	135°	135°	75°
B2206	Aluminum	Left	0.58	135°	135°	135°	75°
Q2206	Steel	Left	1.02	135°	135°	135°	75°

Screws: M8x25 Tightening torque: 25 N m

HE1P3E / High Efficiency clamp - International mount - Housing size 80 / cylinder Ø 63 mm





WEIGHT 7.55 kg

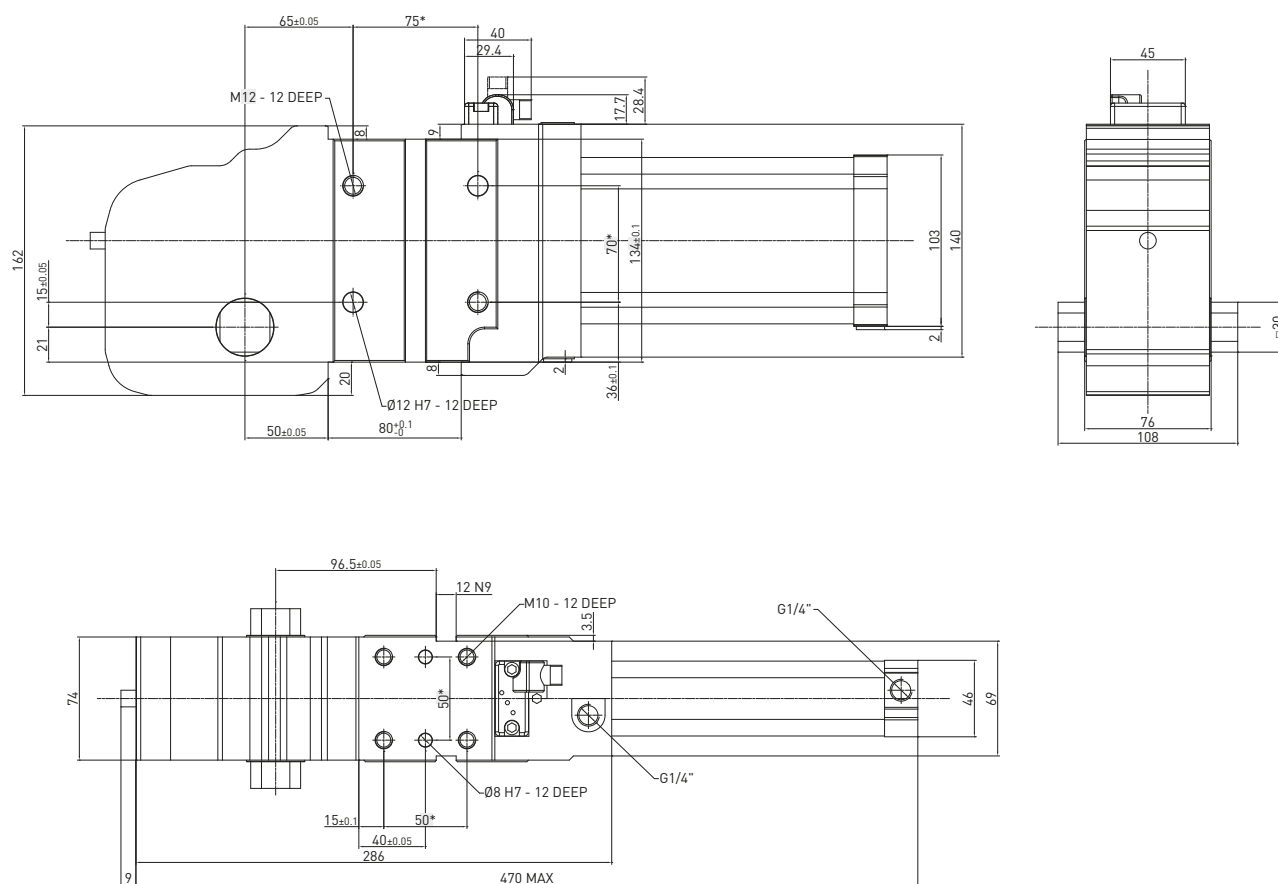* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02 DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 20/10/2015

Clamping arms / 30 mm shaft

REV. 01 - 08/02/2019

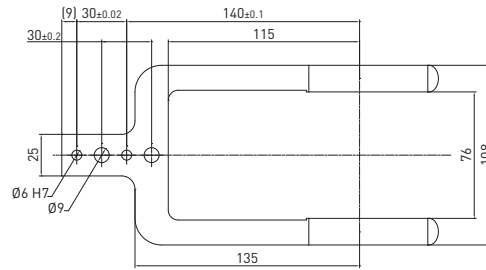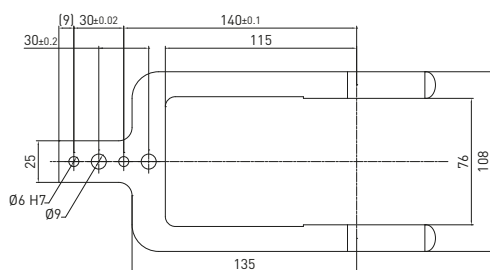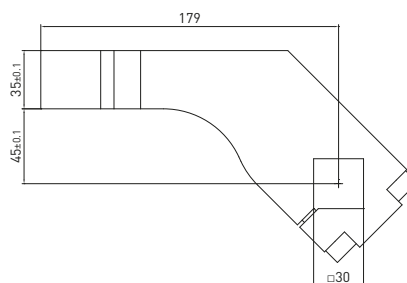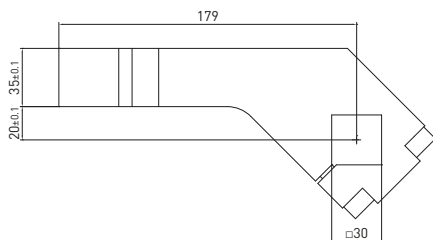

30 mm shaft – 20 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B3001	Aluminum	Central	1.1	135°	110°	135°	75°
B3002	Aluminum	Right	1.15	135°	110°	135°	75°
B3003	Aluminum	Left	1.15	135°	110°	135°	75°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft


30 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B3004	Aluminum	Central	1.18	135°	110°	135°	75°
B3005	Aluminum	Right	1.2	135°	110°	135°	75°
B3006	Aluminum	Left	1.2	135°	110°	135°	75°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft


HE1P4EG / Power clamp - 32 mm bore cylinder and mounting pattern interchangeable to 50 and 63 mm bore clamps

WEIGHT 1.36 kg

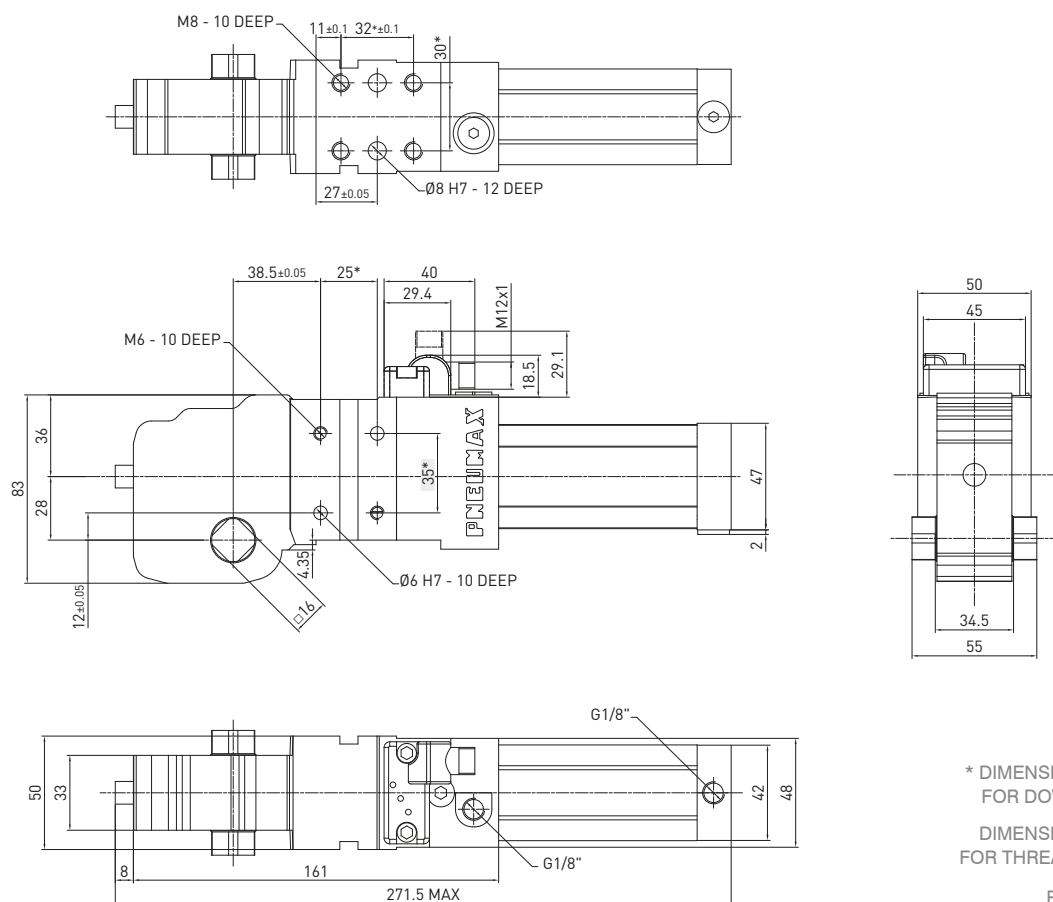

Clamping arms / 16 mm shaft

REV. 00 - 23/04/2019

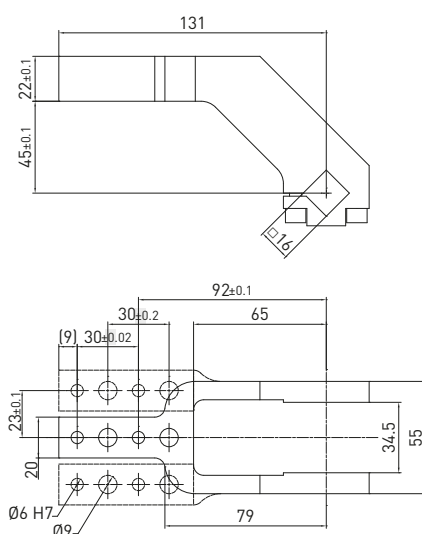




16 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1654	Aluminum	Central	0.3	135°	135°	N/A	45°
B1655	Aluminum	Right	0.3	135°	135°	N/A	45°
B1656	Aluminum	Left	0.3	135°	135°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

HE1P5EG / High Efficiency clamp - International mount - Housing size 50 / cylinder Ø 40 mm

WEIGHT 2,56 kg

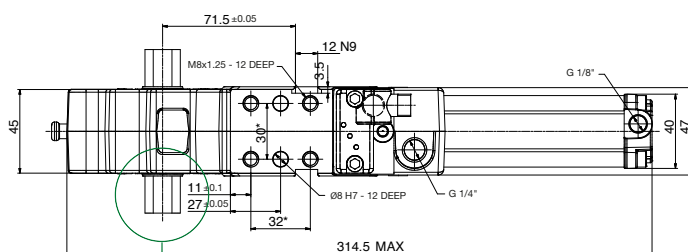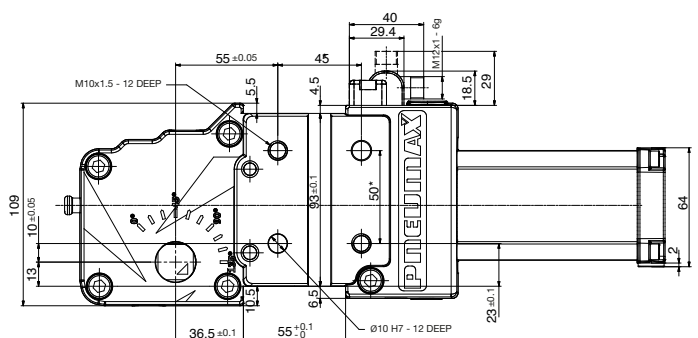


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1



REV. 00 - 21/10/2025

**20 mm NAAMS shaft length,
QNACA- clamping arms
can be used with this series.
Please refer to the following pages.**

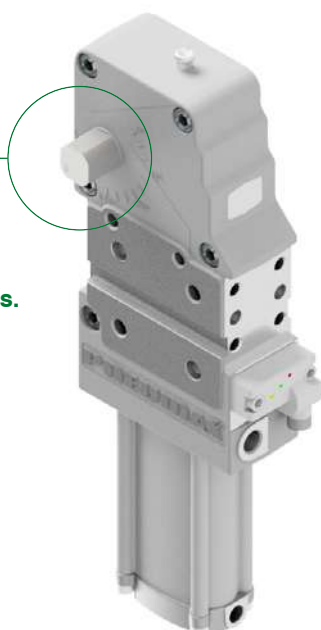

HE1P6EG / High Efficiency clamp - International mount - Housing size 63 / cylinder Ø 50 mm

WEIGHT 3,6 kg

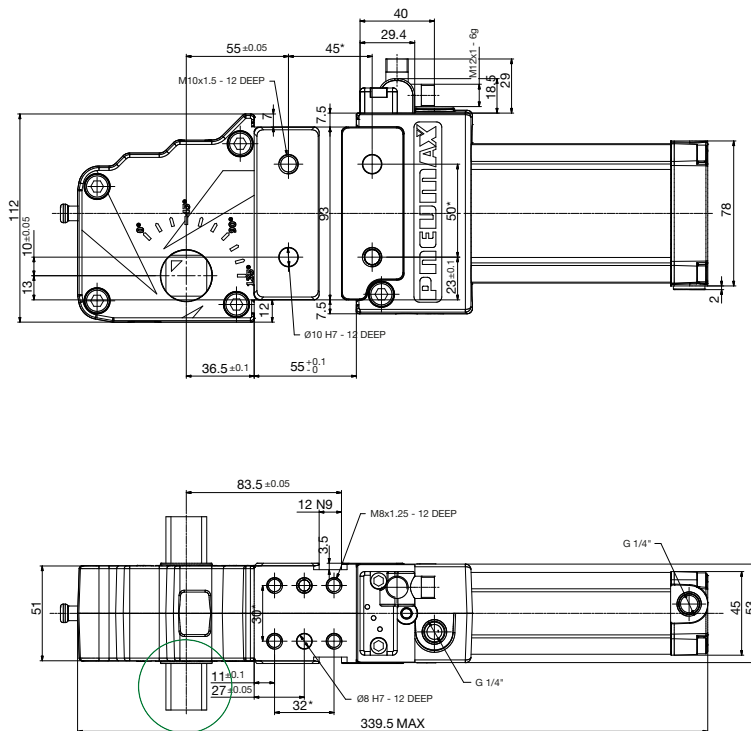

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 21/10/2025

**25 mm NAAMS shaft length,
QNACA- clamping arms
can be used with this series.
Please refer to the following pages.**



HE2-Series

High efficiency power clamps conforming to the NAAMS Standard

GLOBAL STANDARD COMPONENTS
NAAMS



Patented

Air consumption saving up to 41%

The perfect combination between **functionality** and **efficiency**: same clamping moment, same holding moment, same overall and functional dimensions, same load capacity of a standard clamp with International and NAAMS mounts available.

Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features


Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

HE2P1E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 31/03/2015

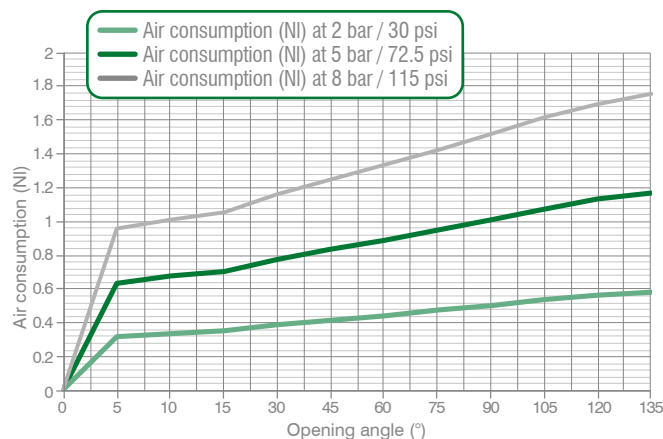

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

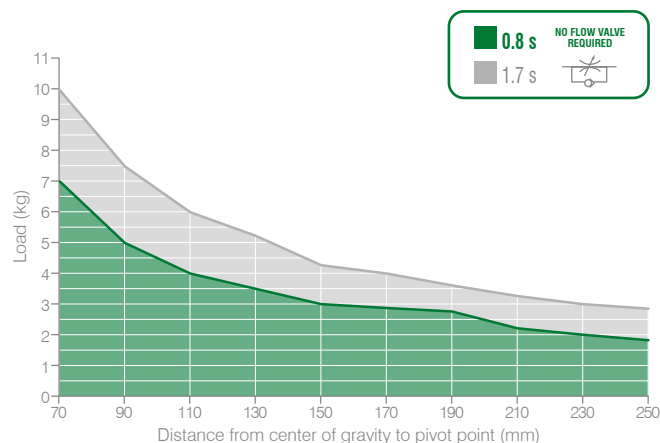

• Clamping moment (at 5 bar / 72.5 psi)

185 N m / 136,44 lb·ft

• Holding moment


800 N m / 590,04 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

HE2P2E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 31/03/2015

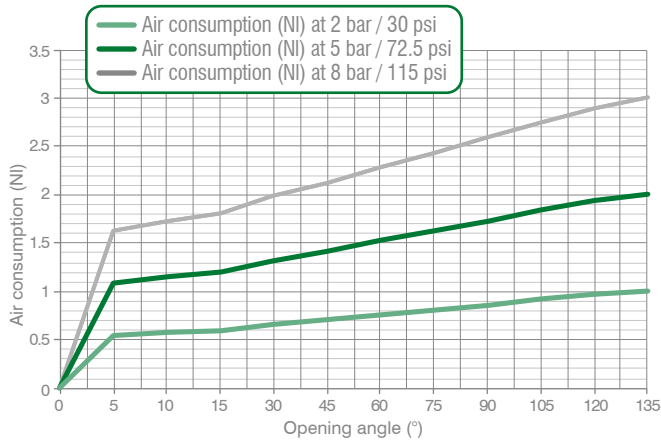

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

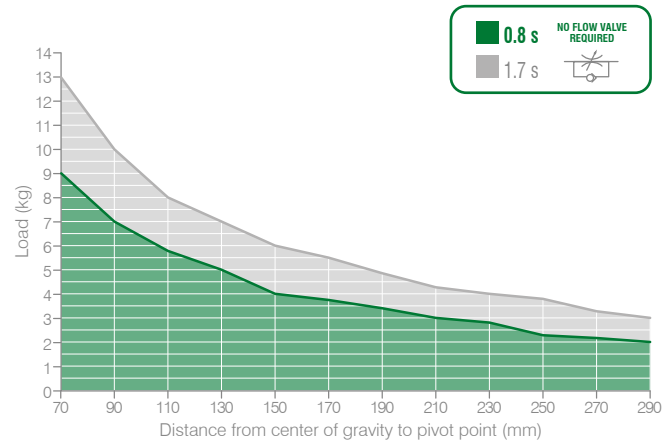

• Clamping moment (at 5 bar / 72.5 psi)

390 N m / 287,64 lb·ft

• Holding moment


1500 N m / 1.106,34 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

HE2P3E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 01 - 17/09/2024

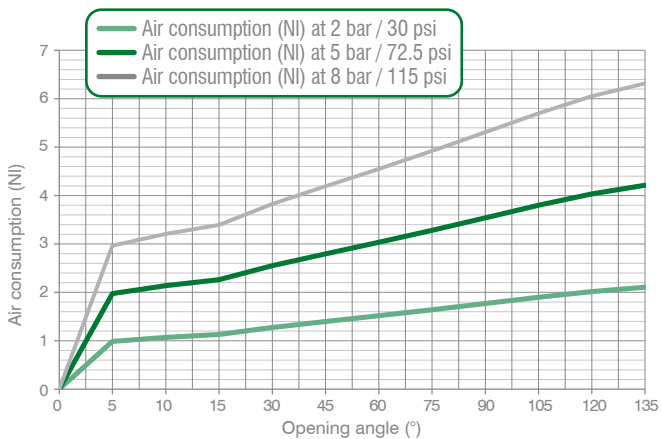

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

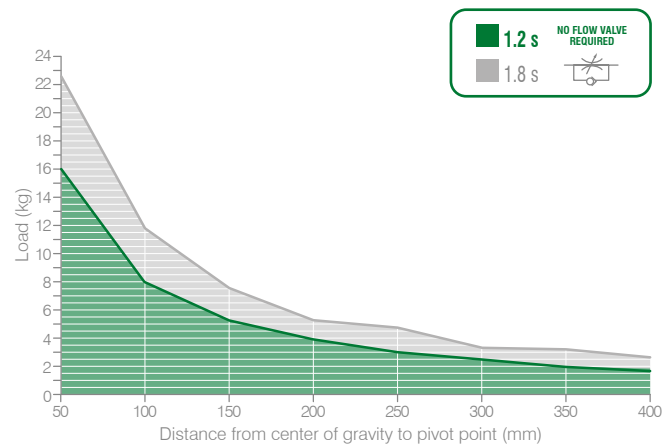

• Clamping moment (at 5 bar / 72.5 psi)

850 N m / 626,92 lb·ft

• Holding moment

2500 N m / 1.843,90 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

HE2-Series / Ordering string

HE2-Series

HE 2 P 2 E G L


HE	VERSION	HE = high efficiency clamp
2	MOUNTING PATTERN	2 = NAAMS Standard
P	OPERATION	P = pneumatic
2	SIZE	1 = housing size 50 / cylinder Ø 40 mm 3 = housing size 80 / cylinder Ø 63 mm 2 = housing size 63 / cylinder Ø 50 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP N = NPT
L	SHAFT OUTPUT	— = dual output L = single output - LEFT R = single output - RIGHT



Please see the charts in the datasheets
for arm position as well as for max. opening angle.
NAAMS clamping arms to be ordered separately
*for size 3 > 20 mm offset

HE2P1E / High Efficiency clamp - NAAMS Std - Housing size 50/cylinder Ø 40 mm

WEIGHT 2.5 kg

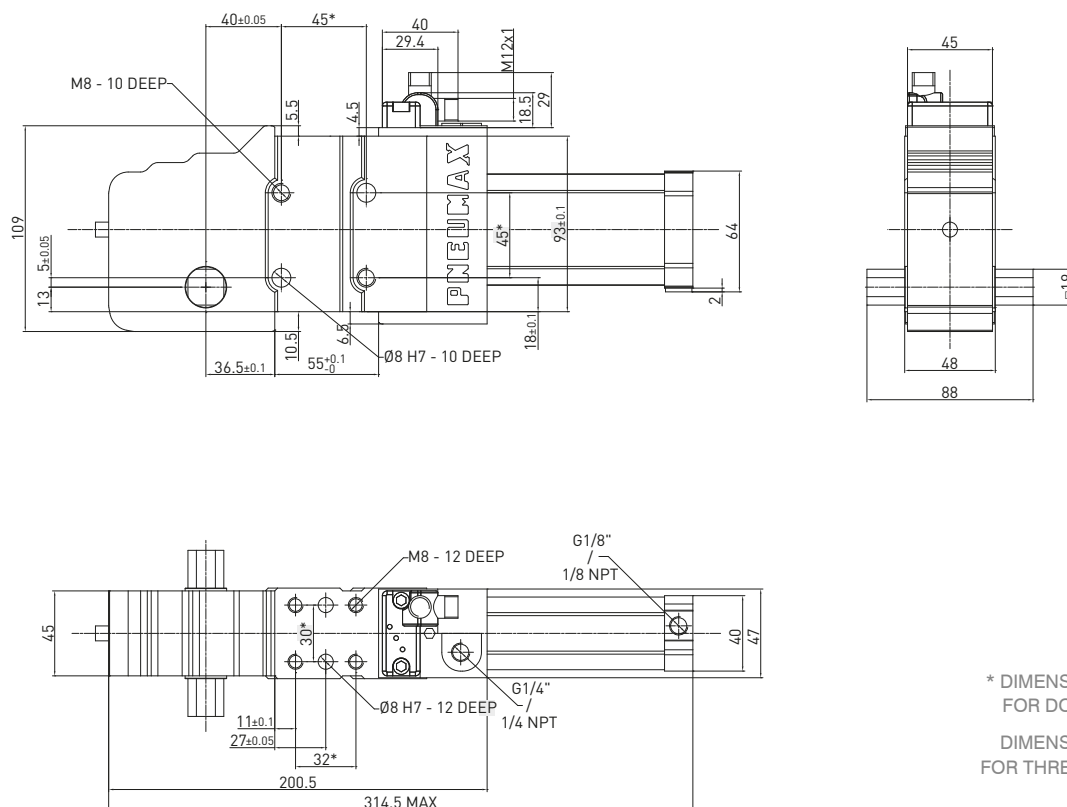


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02
DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 02 - 29/03/2019


Clamping arms / 19 mm shaft - NAAMS Std

REV 03 - 29/03/2019


0 mm OFFSET

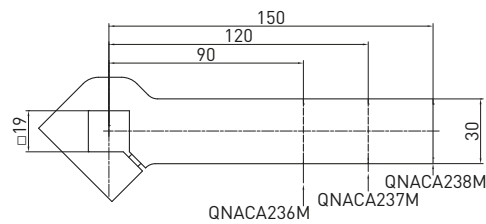

25 mm OFFSET

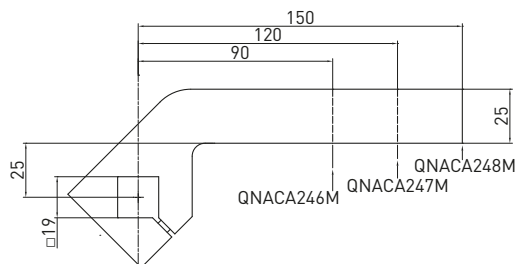

50 mm OFFSET

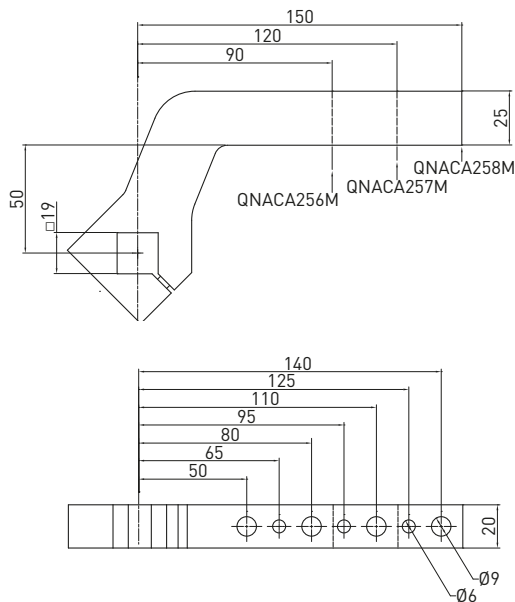

19 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA236M	Steel	90	0.4	135°	135°	135°	135°
QNACA237M	Steel	120	0.49	135°	135°	135°	135°
QNACA238M	Steel	150	0.58	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

19 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA246M	Steel	90	0.44	135°	135°	135°	135°
QNACA247M	Steel	120	0.52	135°	135°	135°	135°
QNACA248M	Steel	150	0.6	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

19 mm shaft – 50 mm offset



Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA256M	Steel	90	0.52	135°	135°	135°	135°
QNACA257M	Steel	120	0.6	135°	135°	135°	135°
QNACA258M	Steel	150	0.68	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

HE2P2E / High efficiency clamp - NAAMS Std - Housing size 63 / cylinder Ø 50 mm

WEIGHT 2.8 kg

CLAMPING

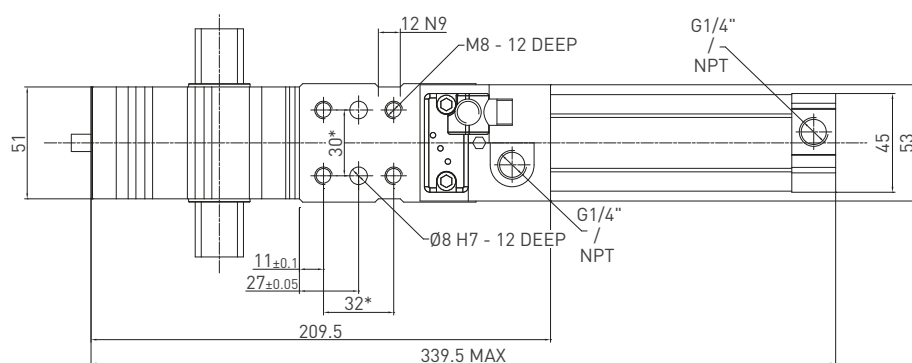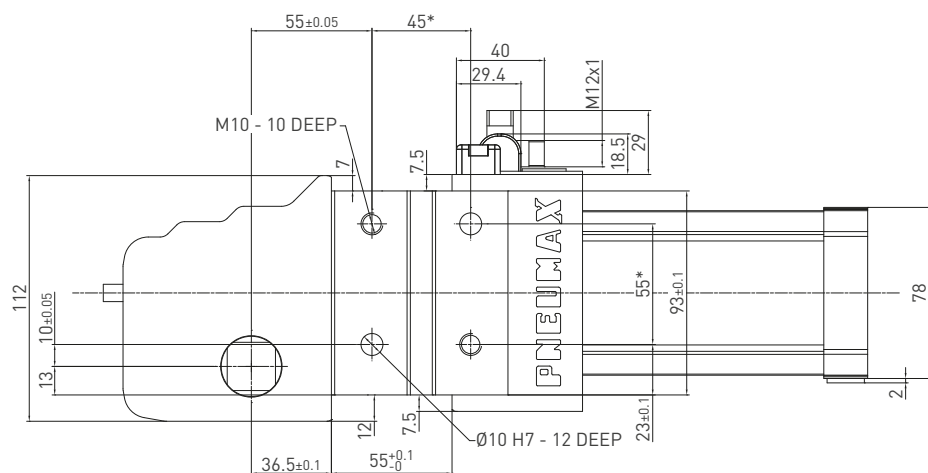

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 02/10/2015


Clamping arms / 22 mm shaft - NAAMS Std

REV 02 - 29/03/2019


0 mm OFFSET

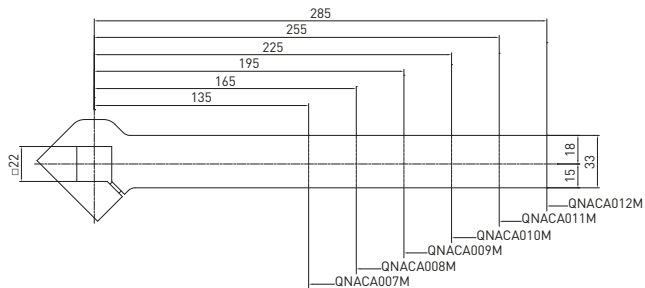

25 mm OFFSET

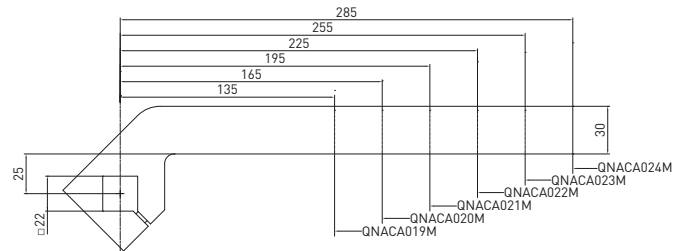

CLAMPING

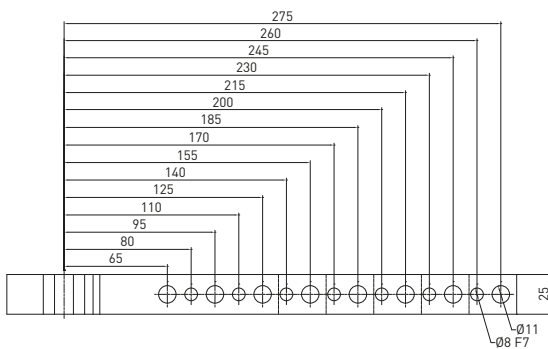

22 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA007M	Steel	135	0.72	135°	135°	135°	135°
QNACA008M	Steel	165	0.83	135°	135°	135°	135°
QNACA009M	Steel	195	0.94	135°	135°	135°	135°
QNACA010M	Steel	225	1.05	135°	135°	135°	135°
QNACA011M	Steel	255	1.16	135°	135°	135°	135°
QNACA012M	Steel	285	1.28	135°	135°	135°	135°

Screws: M8x25 Tightening torque: 25 N m / 18.43 lb ft

22 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA019M	Steel	135	0.84	135°	135°	135°	135°
QNACA020M	Steel	165	0.95	135°	135°	135°	135°
QNACA021M	Steel	195	1.05	135°	135°	135°	135°
QNACA022M	Steel	225	1.16	135°	135°	135°	135°
QNACA023M	Steel	255	1.26	135°	135°	135°	135°
QNACA024M	Steel	285	1.37	135°	135°	135°	135°




Screws: M8x25 Tightening torque: 25 N m / 18.43 lb ft

Clamping arms / 22 mm shaft - NAAMS Std

REV. 01 - 31/07/2015

70 mm OFFSET

120 mm OFFSET

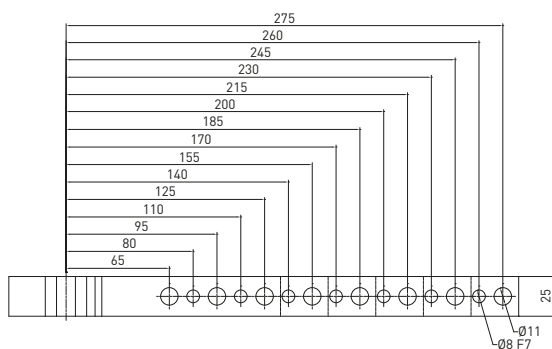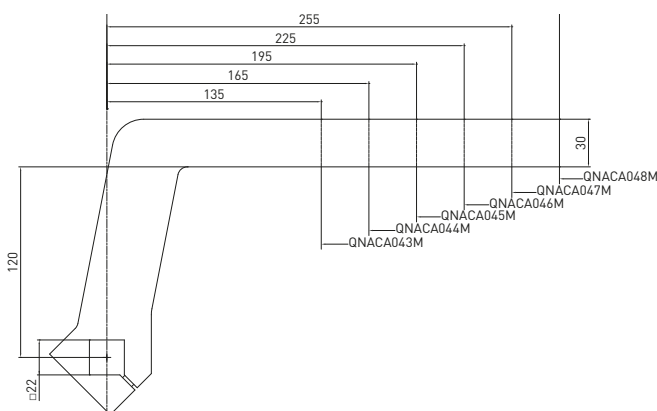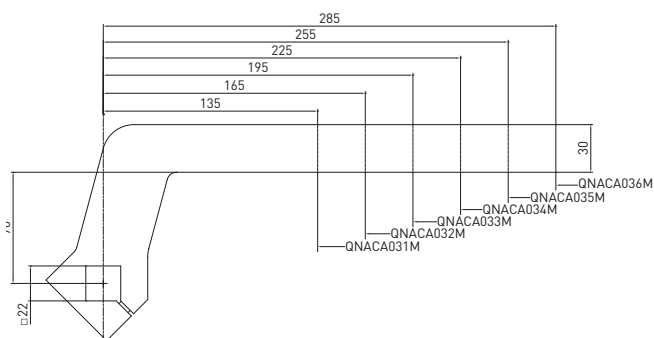

22 mm shaft – 70 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA031M	Steel	135	1.05	135°	135°	135°	135°
QNACA032M	Steel	165	1.16	135°	135°	135°	135°
QNACA033M	Steel	195	1.27	135°	135°	135°	135°
QNACA034M	Steel	225	1.38	135°	135°	135°	135°
QNACA035M	Steel	255	1.49	135°	135°	135°	135°
QNACA036M	Steel	285	1.6	135°	135°	135°	135°

Screws: M8X25 Tightening torque: 25 N m / 18.43 lb ft



22 mm shaft – 120 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA043M	Steel	135	1.27	135°	135°	135°	135°
QNACA044M	Steel	165	1.37	135°	135°	135°	135°
QNACA045M	Steel	195	1.48	135°	135°	135°	135°
QNACA046M	Steel	225	1.58	135°	135°	135°	135°
QNACA047M	Steel	255	1.69	135°	135°	135°	135°
QNACA048M	Steel	285	1.8	135°	135°	135°	135°

Screws: M8X25 Tightening torque: 25 N m / 18.43 lb ft

HE2P3E / High Efficiency clamp - NAAMS Std - Housing size 80 / cylinder Ø 63 mm

WEIGHT 7.76 kg

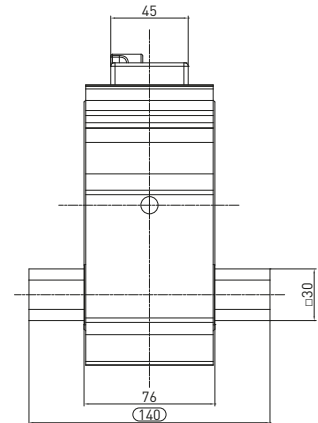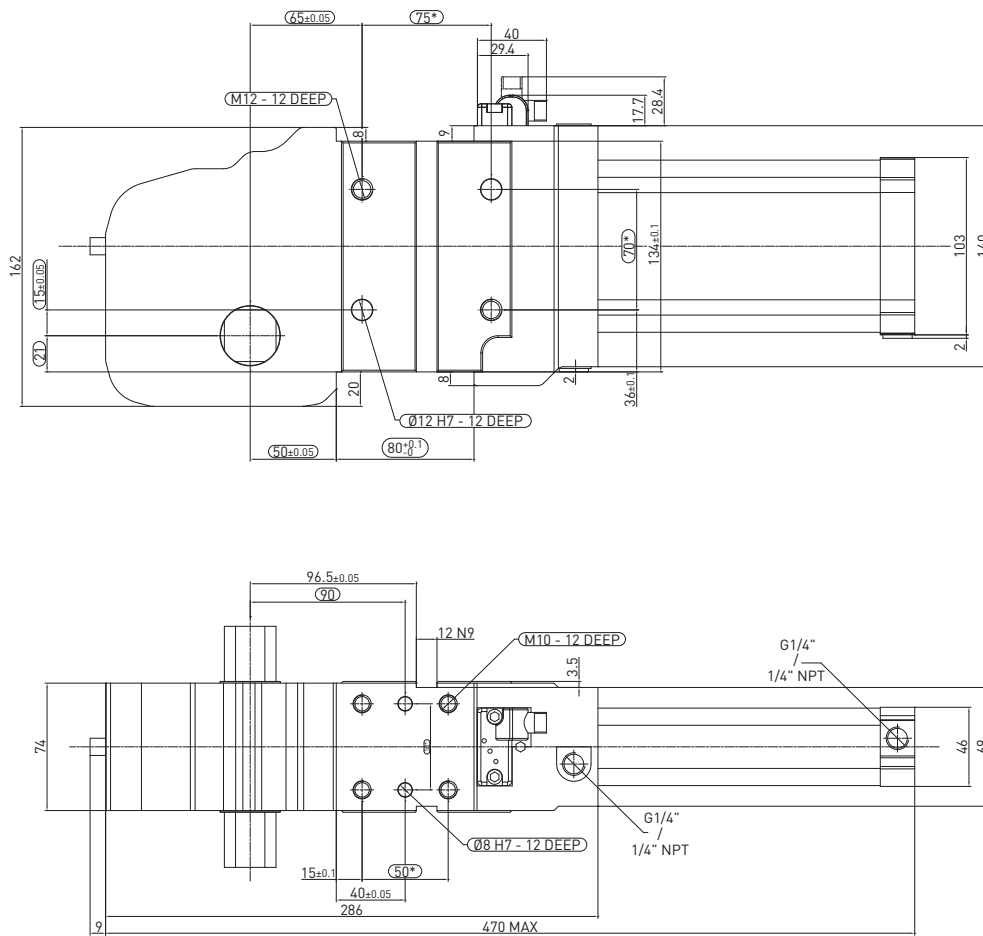


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02
DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 20/10/2015



Clamping arms / 30 mm shaft - NAAMS Std

REV.04 - 28/06/2024

0 mm OFFSET

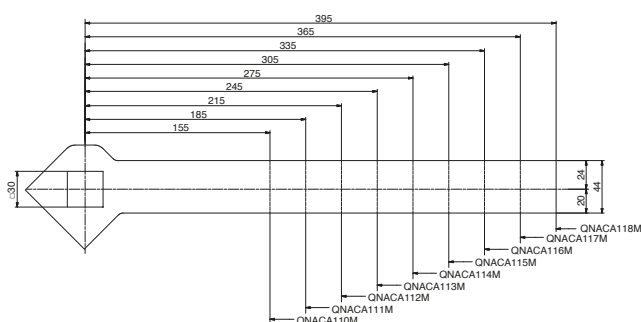

25 mm OFFSET

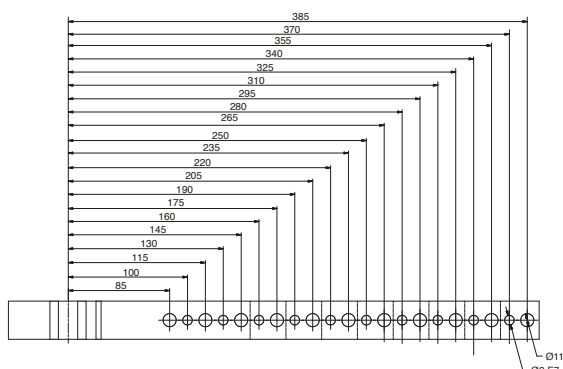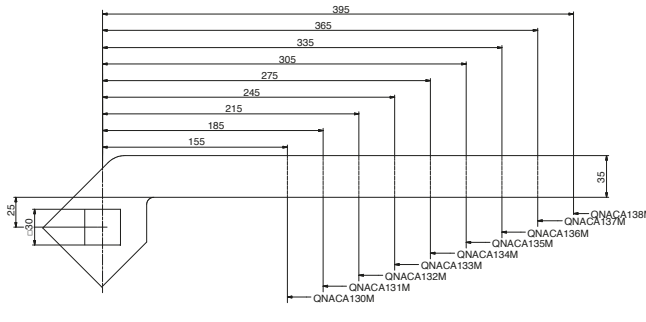

30 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA110M	Steel	155	1.41	135°	135°	135°	135°
QNACA111M	Steel	185	1.58	135°	135°	135°	135°
QNACA112M	Steel	215	1.76	135°	135°	135°	135°
QNACA113M	Steel	245	1.93	135°	135°	135°	135°
QNACA114M	Steel	275	2.1	135°	135°	135°	135°
QNACA115M	Steel	305	2.27	135°	135°	135°	135°
QNACA116M	Steel	335	2.45	135°	135°	135°	135°
QNACA117M	Steel	365	2.62	135°	135°	135°	135°
QNACA118M	Steel	395	2.8	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

30 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA130M	Steel	155	1.24	135°	135°	135°	135°
QNACA131M	Steel	185	1.39	135°	135°	135°	135°
QNACA132M	Steel	215	1.54	135°	135°	135°	135°
QNACA133M	Steel	245	1.69	135°	135°	135°	135°
QNACA134M	Steel	275	1.84	135°	135°	135°	135°
QNACA135M	Steel	305	2	135°	135°	135°	135°
QNACA136M	Steel	335	2.14	135°	135°	135°	135°
QNACA137M	Steel	365	2.29	135°	135°	135°	135°
QNACA138M	Steel	395	2.45	135°	135°	135°	135°




Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

Clamping arms / 30 mm shaft - NAAMS Std

REV.04 - 28/06/2024

70 mm OFFSET

120 mm OFFSET

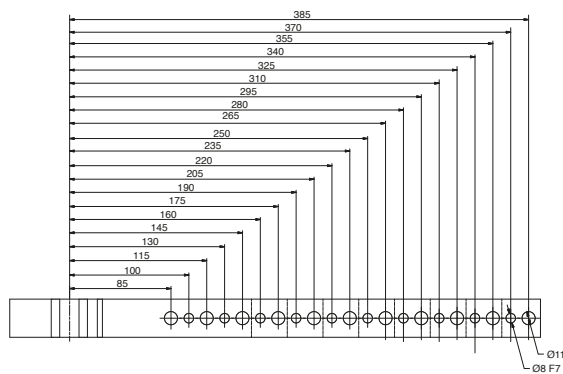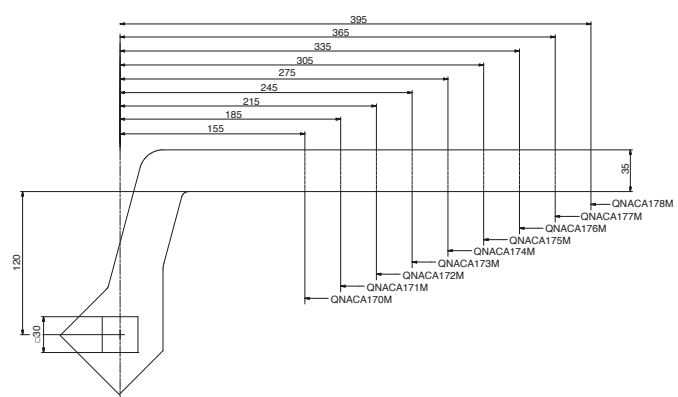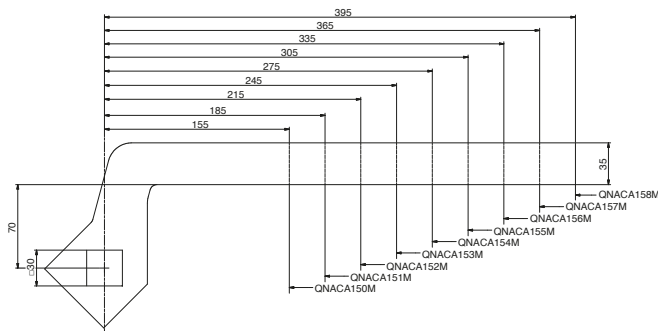

30 mm shaft – 70 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA150M	Steel	155	1.7	135°	135°	135°	135°
QNACA151M	Steel	185	1.85	135°	135°	135°	135°
QNACA152M	Steel	215	2	135°	135°	135°	135°
QNACA153M	Steel	245	2.15	135°	135°	135°	135°
QNACA154M	Steel	275	2.3	135°	135°	135°	135°
QNACA155M	Steel	305	2.45	135°	135°	135°	135°
QNACA156M	Steel	335	2.6	135°	135°	135°	135°
QNACA157M	Steel	365	2.76	135°	135°	135°	135°
QNACA158M	Steel	395	2.92	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

30 mm shaft – 120 mm offset


Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA170M	Steel	155	1.97	135°	135°	135°	135°
QNACA171M	Steel	185	2.12	135°	135°	135°	135°
QNACA172M	Steel	215	2.27	135°	135°	135°	135°
QNACA173M	Steel	245	2.42	135°	135°	135°	135°
QNACA174M	Steel	275	2.57	135°	135°	135°	135°
QNACA175M	Steel	305	2.72	135°	135°	135°	135°
QNACA176M	Steel	335	2.87	135°	135°	135°	135°
QNACA177M	Steel	365	3.02	135°	135°	135°	135°
QNACA178M	Steel	395	3.19	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

HE4-Series

High efficiency power clamps conforming to the NAAMS Standard with integrated hold open function

GLOBAL STANDARD COMPONENTS
NAAMS

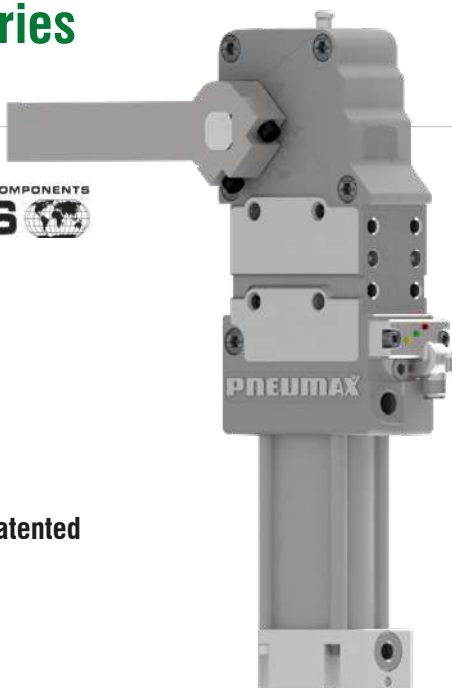

Patented

Air consumption saving up to 41%

The perfect combination between **functionality** and **efficiency**: same clamping moment, same holding moment, same overall and functional dimensions, same load capacity of a standard clamp with International and NAAMS mounts available.

Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features


Operating pressure	from 3 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

HE4P1E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 31/03/2015

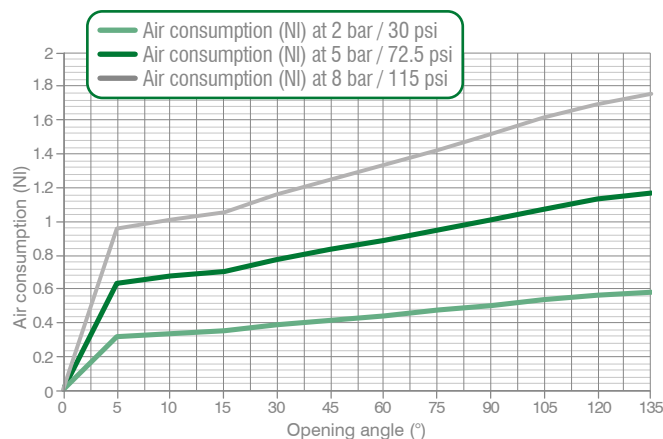

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

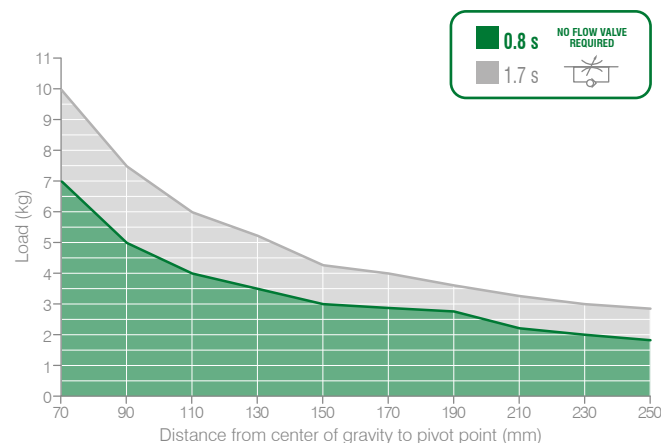

• Clamping moment (at 5 bar / 72.5 psi)

185 N m / 136,44 lb·ft

• Holding moment


800 N m / 590,04 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

HE4P2E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 31/03/2015

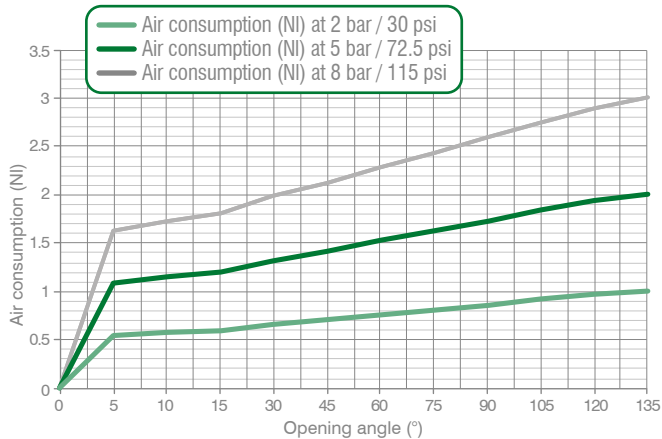

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

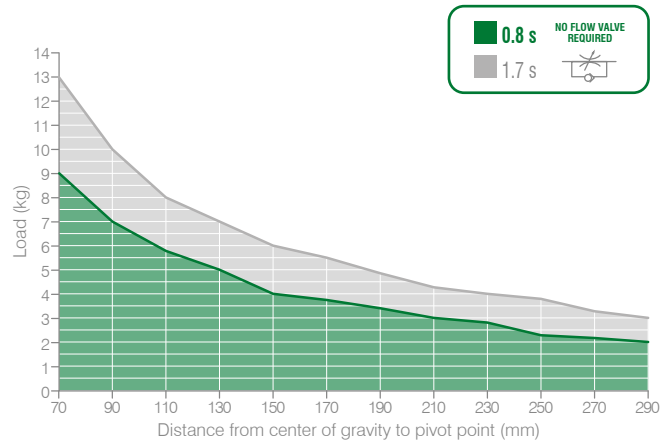

• Clamping moment (at 5 bar / 72.5 psi)

390 N m / 287,64 lb·ft

• Holding moment


1500 N m / 1.106,34 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

HE4P3E


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 01 - 17/09/2024

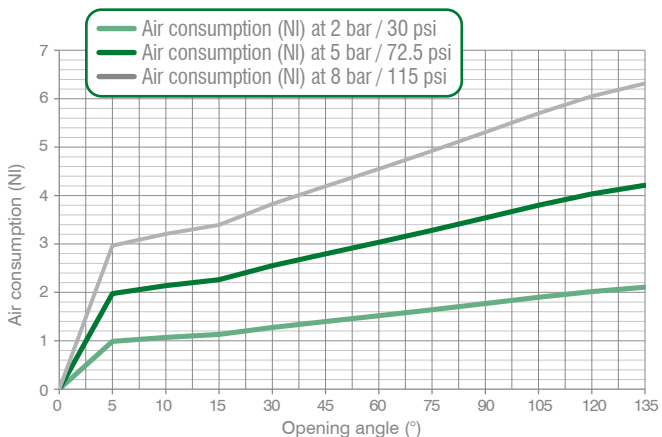

• Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

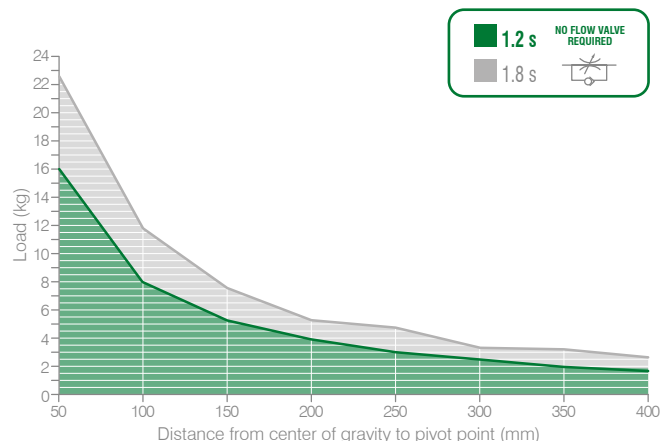

• Clamping moment (at 5 bar / 72.5 psi)

850 N m / 626,92 lb·ft

• Holding moment

2500 N m / 1.843,90 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

HE2-Series / Ordering string

HE4-Series

HE 4 P 2 E N L

HE

VERSION

HE = high efficiency clamp

4

MOUNTING PATTERN

2 = NAAMS Standard
with integrated hold open function

GLOBAL STANDARD COMPONENTS
NAAMS

P

OPERATION

P = pneumatic

2

SIZE

1 = housing size 50 / cylinder Ø 40 mm **3** = housing size 80 / cylinder Ø 63 mm
2 = housing size 63 / cylinder Ø 50 mm

E

SENSOR

E = electronic sensor with M12 swivel connector - PNP
A = electronic sensor with M12 swivel connector - NPN
N = no sensor
B = electronic sensor with M8 swivel connector - PNP

G

PORTS

G = G thread – BSPP
N = NPT


L

SHAFT OUTPUT

= dual output
L = single output - LEFT
R = single output - RIGHT

Please see the charts in the datasheets
for arm position as well as for max. opening angle.
NAAMS clamping arms to be ordered separately
*for size 3 > 20 mm offset

HE4P1E / High Efficiency clamp - NAAMS Std - Housing size 50/cylinder Ø 40 mm

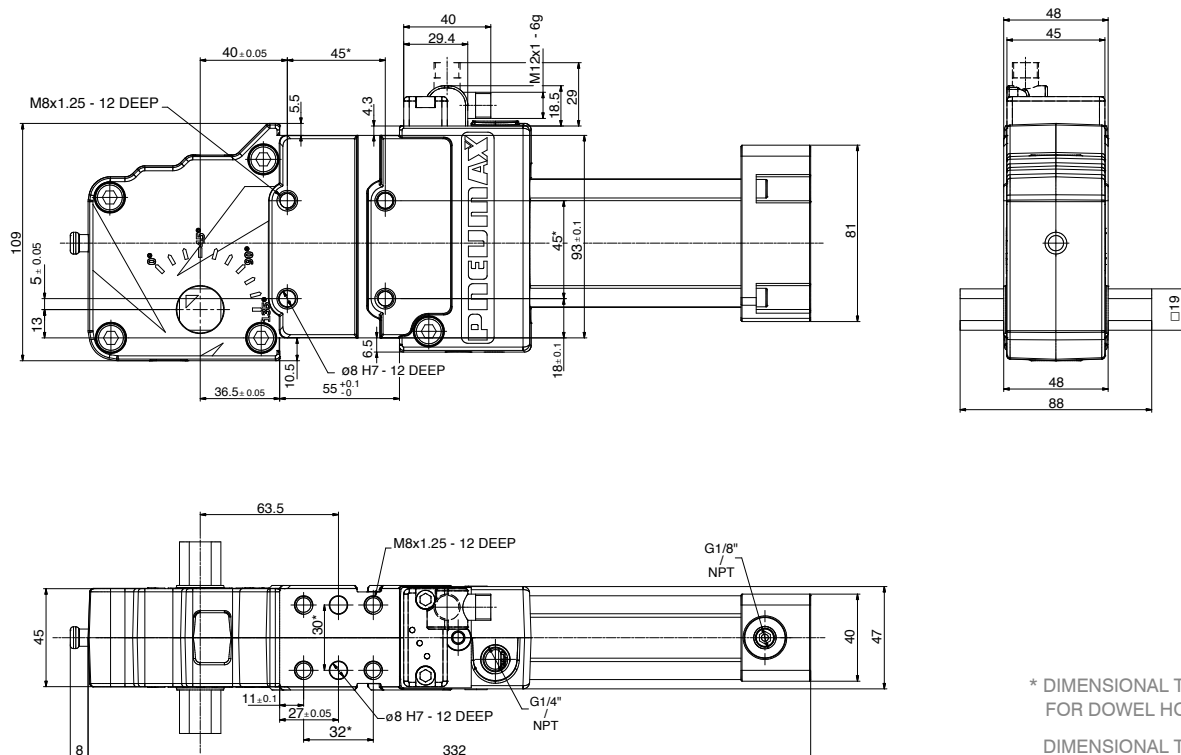


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02
DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 22/10/2025


Clamping arms / 19 mm shaft - NAAMS Std

REV 03 - 29/03/2019


0 mm OFFSET

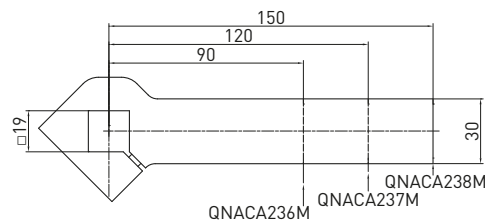

25 mm OFFSET

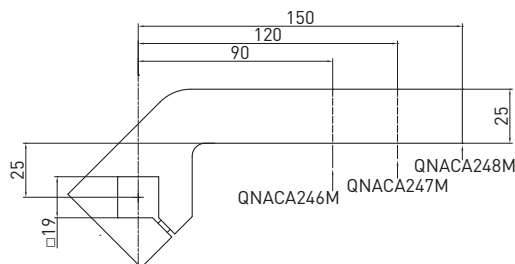

50 mm OFFSET

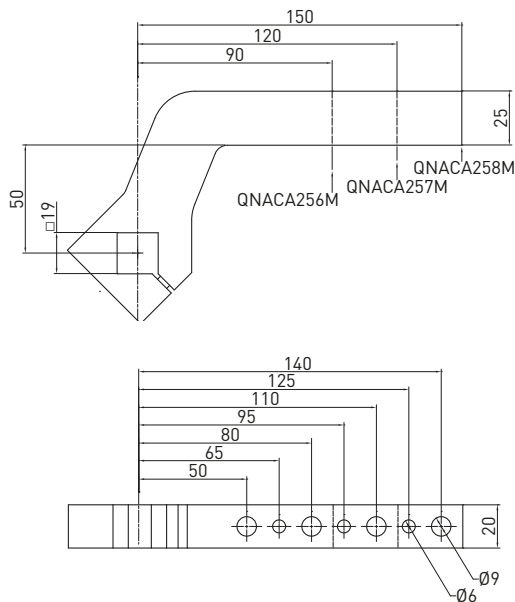

19 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA236M	Steel	90	0.4	135°	135°	135°	135°
QNACA237M	Steel	120	0.49	135°	135°	135°	135°
QNACA238M	Steel	150	0.58	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

19 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA246M	Steel	90	0.44	135°	135°	135°	135°
QNACA247M	Steel	120	0.52	135°	135°	135°	135°
QNACA248M	Steel	150	0.6	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft


19 mm shaft – 50 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA256M	Steel	90	0.52	135°	135°	135°	135°
QNACA257M	Steel	120	0.6	135°	135°	135°	135°
QNACA258M	Steel	150	0.68	135°	135°	135°	135°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

HE4P2E / High efficiency clamp - NAAMS Std - Housing size 63 / cylinder Ø 50 mm

CLAMPING

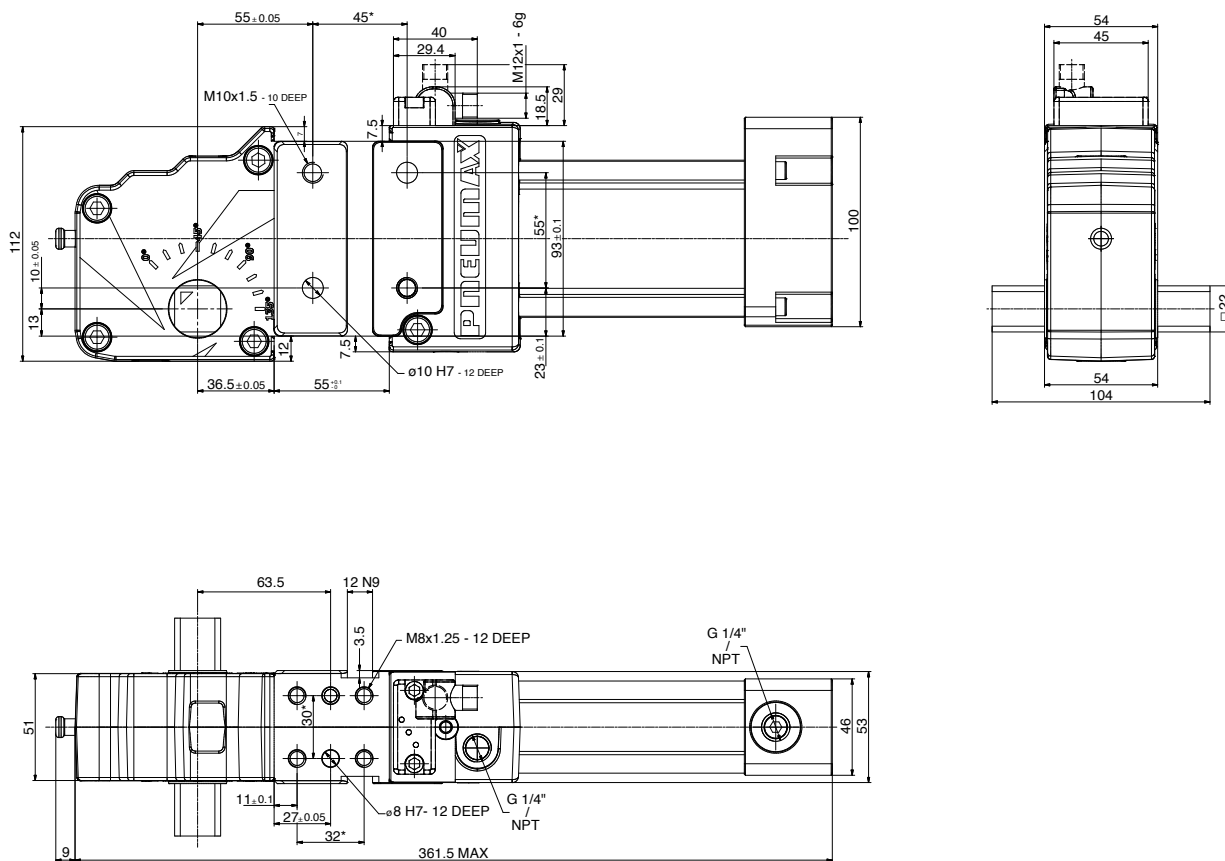

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 22/10/2025


Clamping arms / 22 mm shaft - NAAMS Std

REV 02 - 29/03/2019


0 mm OFFSET

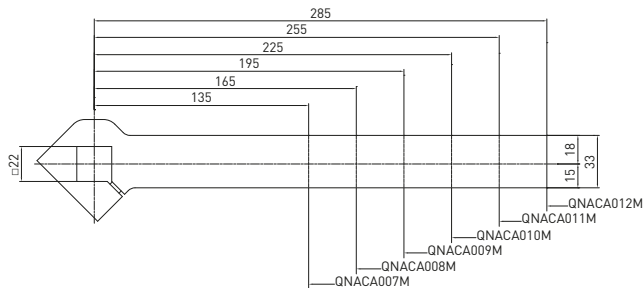

25 mm OFFSET

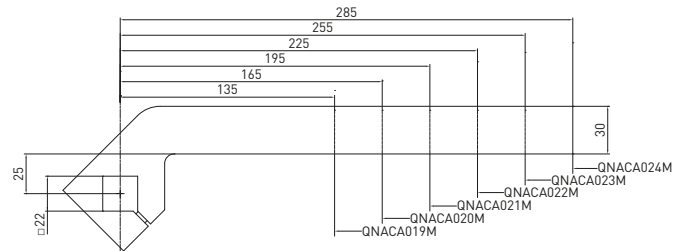

CLAMPING

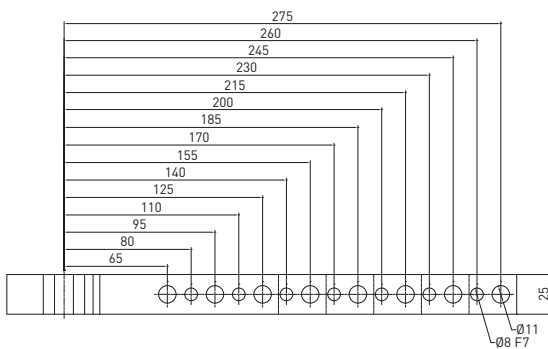

22 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA007M	Steel	135	0.72	135°	135°	135°	135°
QNACA008M	Steel	165	0.83	135°	135°	135°	135°
QNACA009M	Steel	195	0.94	135°	135°	135°	135°
QNACA010M	Steel	225	1.05	135°	135°	135°	135°
QNACA011M	Steel	255	1.16	135°	135°	135°	135°
QNACA012M	Steel	285	1.28	135°	135°	135°	135°

Screws: M8x25 Tightening torque: 25 N m / 18.43 lb ft

22 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA019M	Steel	135	0.84	135°	135°	135°	135°
QNACA020M	Steel	165	0.95	135°	135°	135°	135°
QNACA021M	Steel	195	1.05	135°	135°	135°	135°
QNACA022M	Steel	225	1.16	135°	135°	135°	135°
QNACA023M	Steel	255	1.26	135°	135°	135°	135°
QNACA024M	Steel	285	1.37	135°	135°	135°	135°



Screws: M8x25 Tightening torque: 25 N m / 18.43 lb ft

Clamping arms / 22 mm shaft - NAAMS Std

REV. 01 - 31/07/2015

70 mm OFFSET

120 mm OFFSET

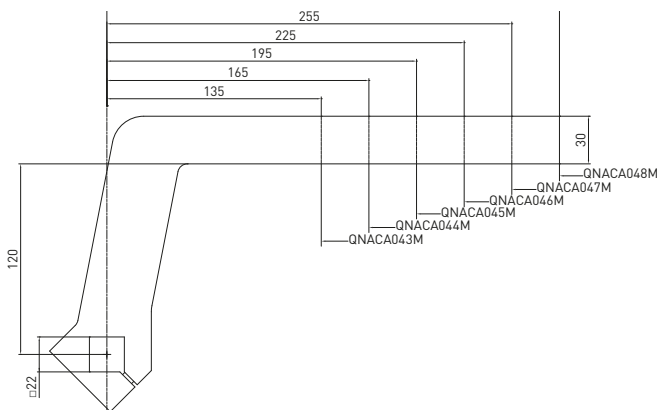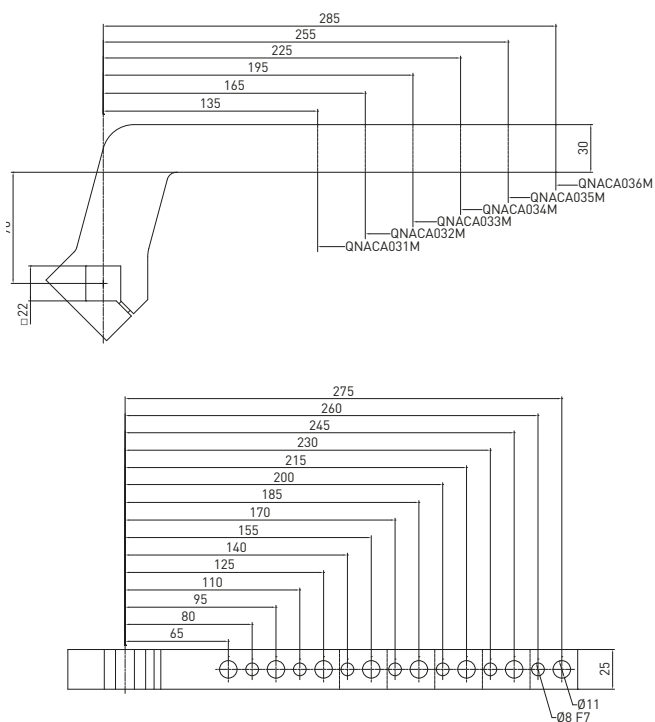

22 mm shaft – 70 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA031M	Steel	135	1.05	135°	135°	135°	135°
QNACA032M	Steel	165	1.16	135°	135°	135°	135°
QNACA033M	Steel	195	1.27	135°	135°	135°	135°
QNACA034M	Steel	225	1.38	135°	135°	135°	135°
QNACA035M	Steel	255	1.49	135°	135°	135°	135°
QNACA036M	Steel	285	1.6	135°	135°	135°	135°


Screws: M8X25 Tightening torque: 25 N m / 18.43 lb ft

22 mm shaft – 120 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA043M	Steel	135	1.27	135°	135°	135°	135°
QNACA044M	Steel	165	1.37	135°	135°	135°	135°
QNACA045M	Steel	195	1.48	135°	135°	135°	135°
QNACA046M	Steel	225	1.58	135°	135°	135°	135°
QNACA047M	Steel	255	1.69	135°	135°	135°	135°
QNACA048M	Steel	285	1.8	135°	135°	135°	135°

Screws: M8X25 Tightening torque: 25 N m / 18.43 lb ft

HE4P3E / High Efficiency clamp - NAAMS Std - Housing size 80 / cylinder Ø 63 mm

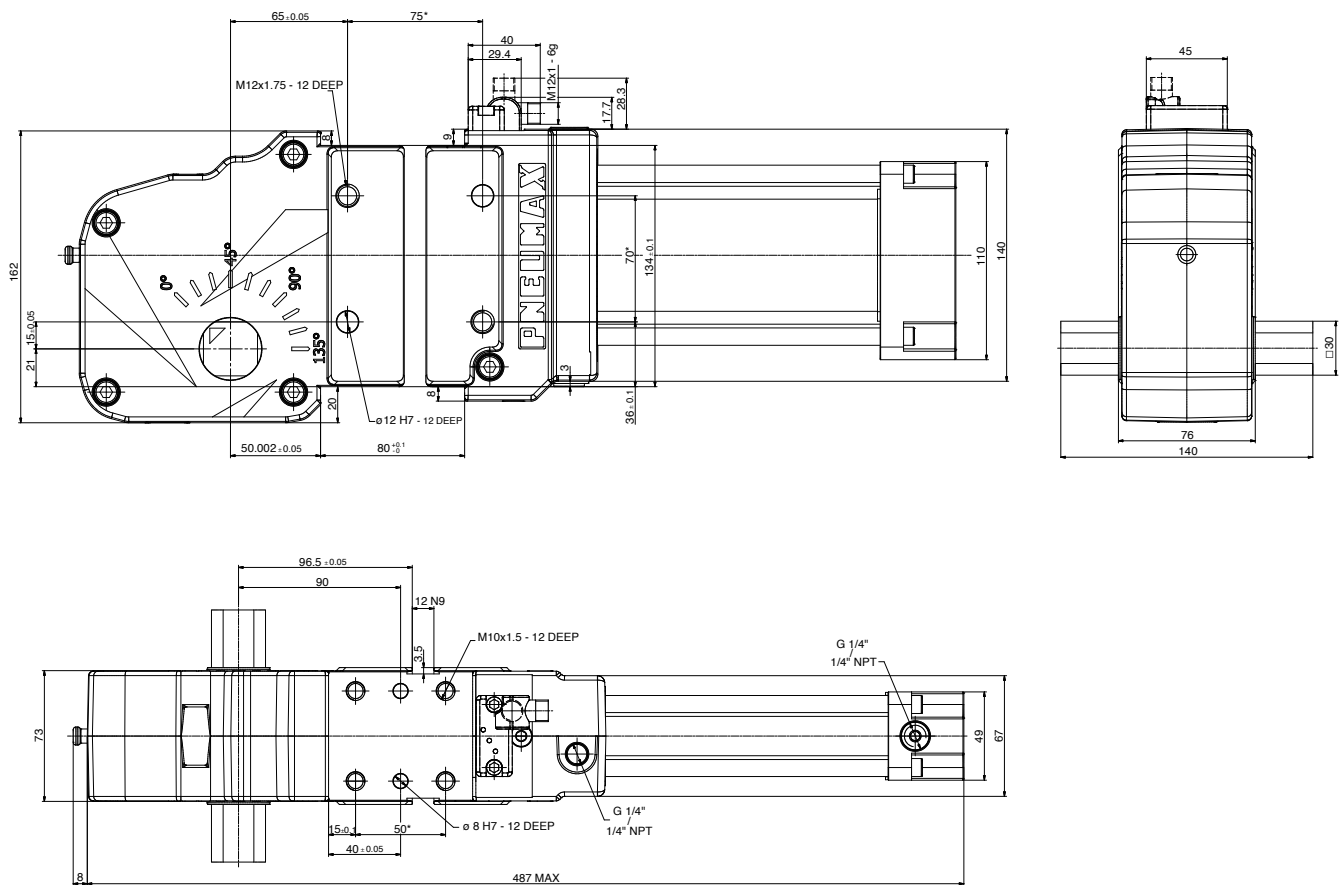

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1


REV. 00 - 22/10/2025

CLAMPING



Clamping arms / 30 mm shaft - NAAMS Std

REV.04 - 28/06/2024

0 mm OFFSET

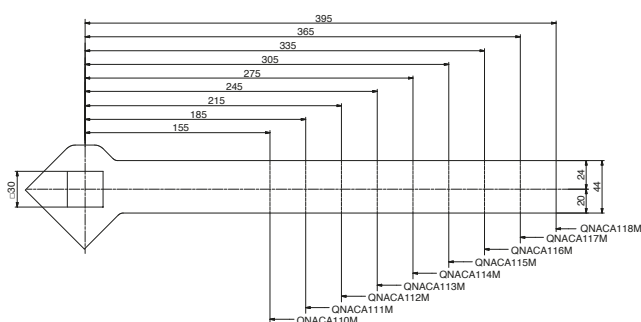

25 mm OFFSET

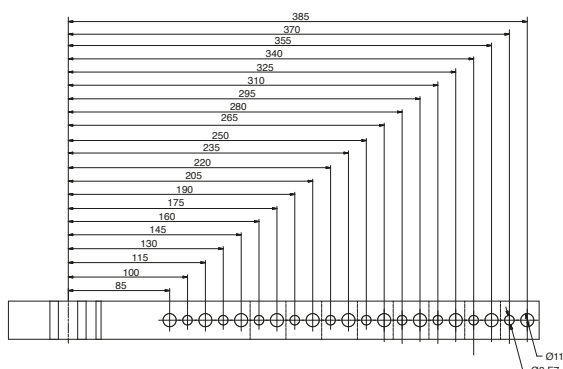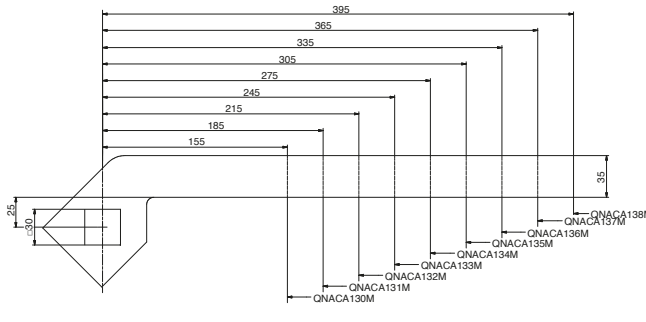

30 mm shaft – 0 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA110M	Steel	155	1.41	135°	135°	135°	135°
QNACA111M	Steel	185	1.58	135°	135°	135°	135°
QNACA112M	Steel	215	1.76	135°	135°	135°	135°
QNACA113M	Steel	245	1.93	135°	135°	135°	135°
QNACA114M	Steel	275	2.1	135°	135°	135°	135°
QNACA115M	Steel	305	2.27	135°	135°	135°	135°
QNACA116M	Steel	335	2.45	135°	135°	135°	135°
QNACA117M	Steel	365	2.62	135°	135°	135°	135°
QNACA118M	Steel	395	2.8	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

30 mm shaft – 25 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA130M	Steel	155	1.24	135°	135°	135°	135°
QNACA131M	Steel	185	1.39	135°	135°	135°	135°
QNACA132M	Steel	215	1.54	135°	135°	135°	135°
QNACA133M	Steel	245	1.69	135°	135°	135°	135°
QNACA134M	Steel	275	1.84	135°	135°	135°	135°
QNACA135M	Steel	305	2	135°	135°	135°	135°
QNACA136M	Steel	335	2.14	135°	135°	135°	135°
QNACA137M	Steel	365	2.29	135°	135°	135°	135°
QNACA138M	Steel	395	2.45	135°	135°	135°	135°




Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

Clamping arms / 30 mm shaft - NAAMS Std

REV.04 - 28/06/2024

70 mm OFFSET

120 mm OFFSET

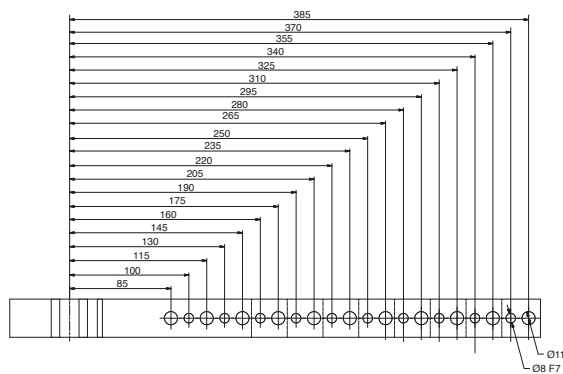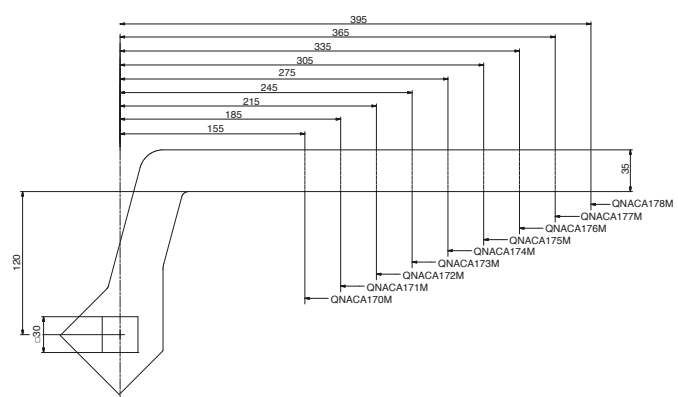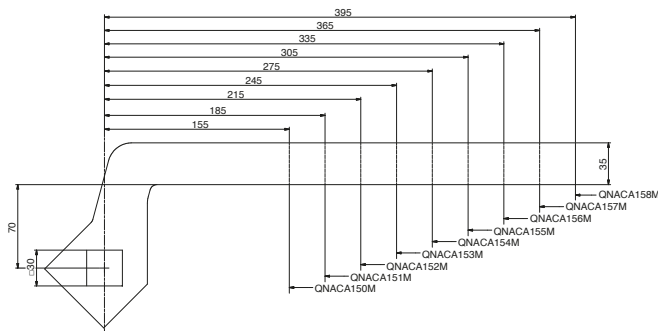

30 mm shaft – 70 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA150M	Steel	155	1.7	135°	135°	135°	135°
QNACA151M	Steel	185	1.85	135°	135°	135°	135°
QNACA152M	Steel	215	2	135°	135°	135°	135°
QNACA153M	Steel	245	2.15	135°	135°	135°	135°
QNACA154M	Steel	275	2.3	135°	135°	135°	135°
QNACA155M	Steel	305	2.45	135°	135°	135°	135°
QNACA156M	Steel	335	2.6	135°	135°	135°	135°
QNACA157M	Steel	365	2.76	135°	135°	135°	135°
QNACA158M	Steel	395	2.92	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

30 mm shaft – 120 mm offset

Part no.	Material	Length (mm)	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
QNACA170M	Steel	155	1.97	135°	135°	135°	135°
QNACA171M	Steel	185	2.12	135°	135°	135°	135°
QNACA172M	Steel	215	2.27	135°	135°	135°	135°
QNACA173M	Steel	245	2.42	135°	135°	135°	135°
QNACA174M	Steel	275	2.57	135°	135°	135°	135°
QNACA175M	Steel	305	2.72	135°	135°	135°	135°
QNACA176M	Steel	335	2.87	135°	135°	135°	135°
QNACA177M	Steel	365	3.02	135°	135°	135°	135°
QNACA178M	Steel	395	3.19	135°	135°	135°	135°

Screws: M10x40 Tightening torque: 35 N m / 25.81 lb ft

Integrated mechanism


Without air, a spring pushes a steel locking ring in a groove machined in the piston rod termination and prevents it from moving.

On the opposite side, a pneumatic piston, when activated, pushes the steel locking ring and releases the piston.



SINGLE EFFECT




Patented

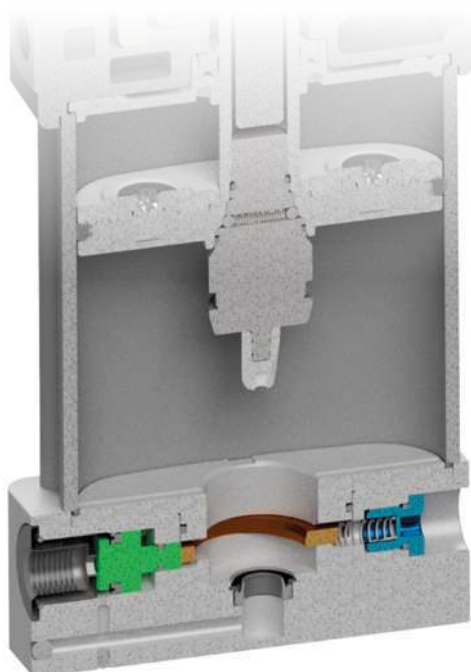

LOCKING

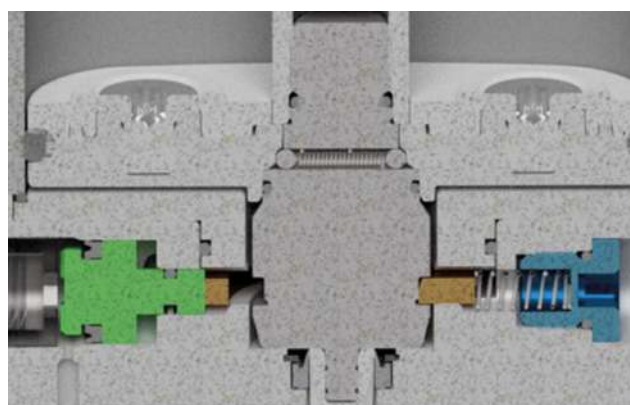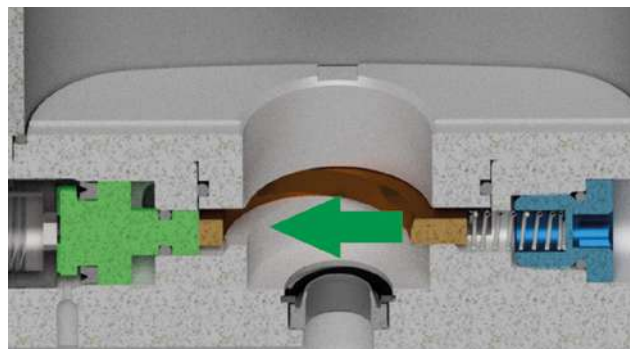


RELEASE

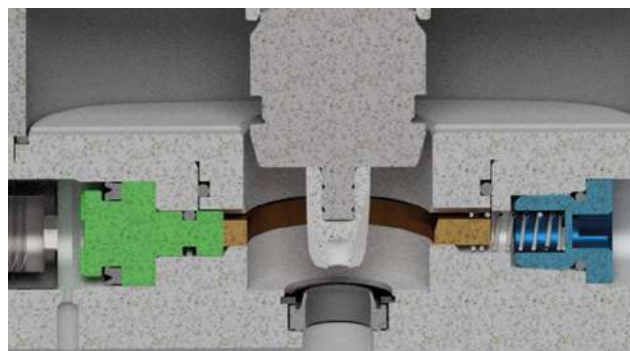

CX-Series



Patented

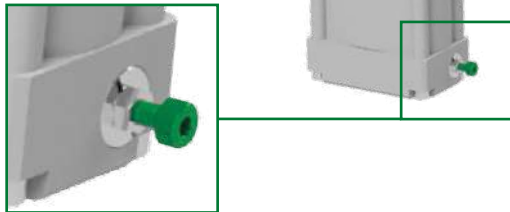

Power clamps for double workpiece identification

International mount - Naams mount

For critical applications, where it is required to identify the unwilling presence of two metal sheets in the process and to avoid their clamping. This built-in device **allows a reliable double workpiece identification**.

The below end cap shows an **adjustment screw**: by loosening the screw, the inlet pressure is adjusted, i.e. reduced to the minimum required to guarantee the **clamping of a single workpiece**, not of two metal sheets. The toggle linkage is therefore prevented from engaging (no toggle lock) and consequently the sensor will not detect the closed position and will signal the anomaly. Once the clamp is properly adjusted from the below end cap screw, to be able to clamp a single workpiece, **it will be able to detect the false condition in case a second workpiece is inadvertently set on the tooling**.

CLAMPING

Instructions

The adjustment cannot be performed without air.

- 1 Install the clamp on the fixture by using all 4 screws and dowels. If mounted on the side, use the key slot.
- 2 Check the shimming and make sure that that with 5/ 5.5 bars the clamp is operating smoothly (0.3 or less shimming is optimal).
- 3 Place the workpiece and clamp it. Make sure you get the red led signal for closed position.
- 4 Open the clamp.
- 5 Use, further to the workpiece, a thickness gauge (a feeler or a shim) whose thickness is half the thickness of the workpiece.
- 6 Close the clamp and tighten the screw slightly. Operate the clamp and check if the closed position signal is lost. In this way, the pressure is reduced and the cylinder won't get enough push force to engage the toggle linkage.
- 7 Open and close a few times, then double check with two workpieces and no red led light will be on, in such a condition.
- 8 If ok, tighten the bolt behind the screw to avoid its loosening.



Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features


Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 40 mm

- **Tooling weight chart**

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

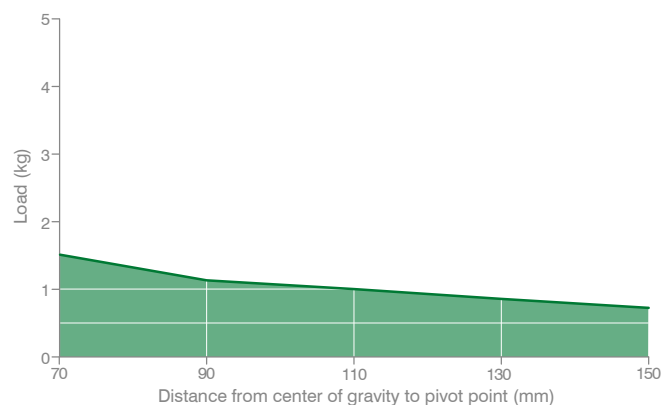


- **Holding moment**

380 N m / 280,27 lb·ft

Size 50 mm

- **Tooling weight chart**

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

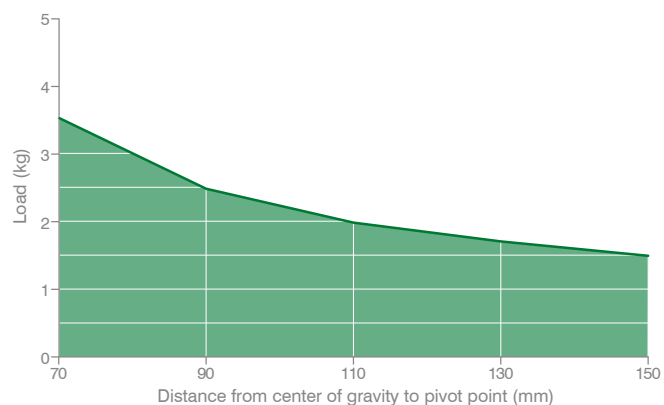


- **Holding moment**

800 N m / 590,04 lb·ft

Size 63 mm

- **Tooling weight chart**

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

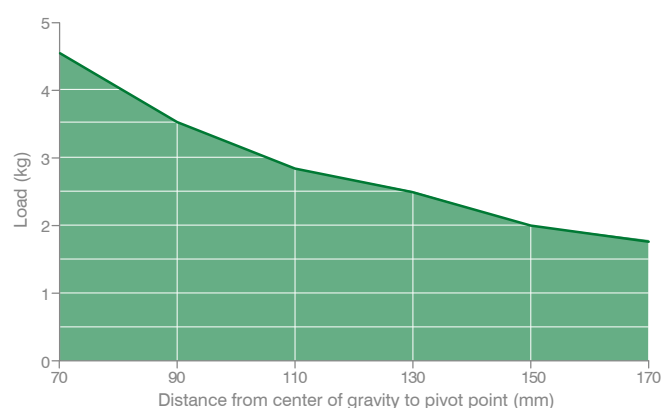

- **Holding moment**

1.500 N m / 1.106,34 lb·ft


CX-Series / Ordering string

CX-Series

C **1** **X** **40** **E** **G** **1** **A** **01**

C	VERSION	C = clamp
1	MOUNTING PATTERN	1 = International mount 2 = NAAMS Standard
X	OPERATION	X = double workpiece identification
40	SIZE	40 = 40 mm 63 = Ø 63 mm 50 = Ø 50 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP N = NPT
1	ARM MOUNT	1 =  2 =  3 =  4 = 
A	ARM MATERIAL	A = aluminum S = steel
01	CLAMP ARM TYPE	01 = wishbone, central, 15 mm offset 02 = wishbone, right, 15 mm offset 03 = wishbone, left, 15 mm offset 04 = wishbone, central, 45 mm offset 05 = wishbone, right, 45 mm offset 06 = wishbone, left, 45 mm offset

Please see the charts
in the datasheets for arm position
as well as for max. opening angle.
NAAMS clamping arms
to be ordered separately

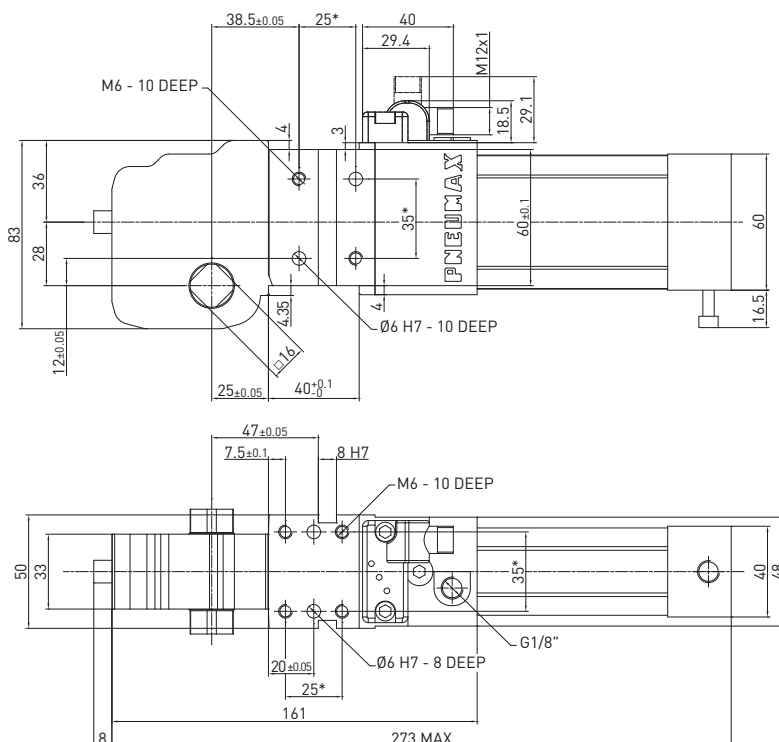C1X40E / Clamp with double workpiece identification - International mount - 40 mm bore**WEIGHT 1.6 kg**


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 20/08/2018

C1X50E / Clamp with double workpiece identification - International mount - 50 mm bore

WEIGHT 2.9 kg

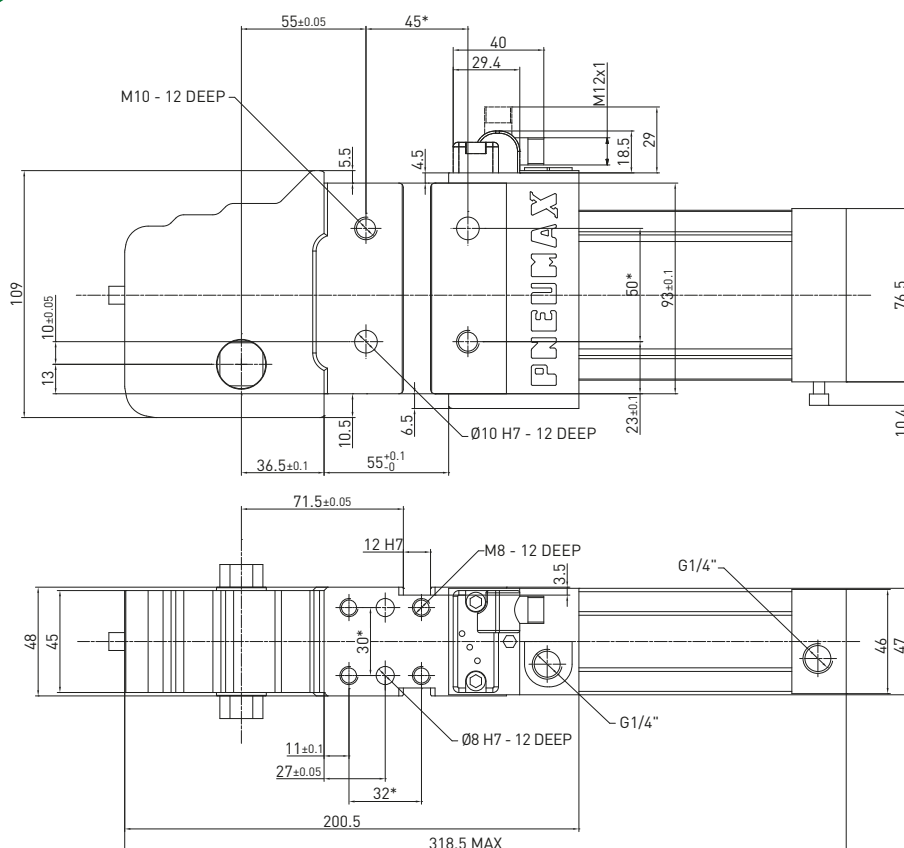


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 20/08/2018

C1X63E / Clamp with double workpiece identification - International mount - 63 mm bore

WEIGHT 3.7 kg

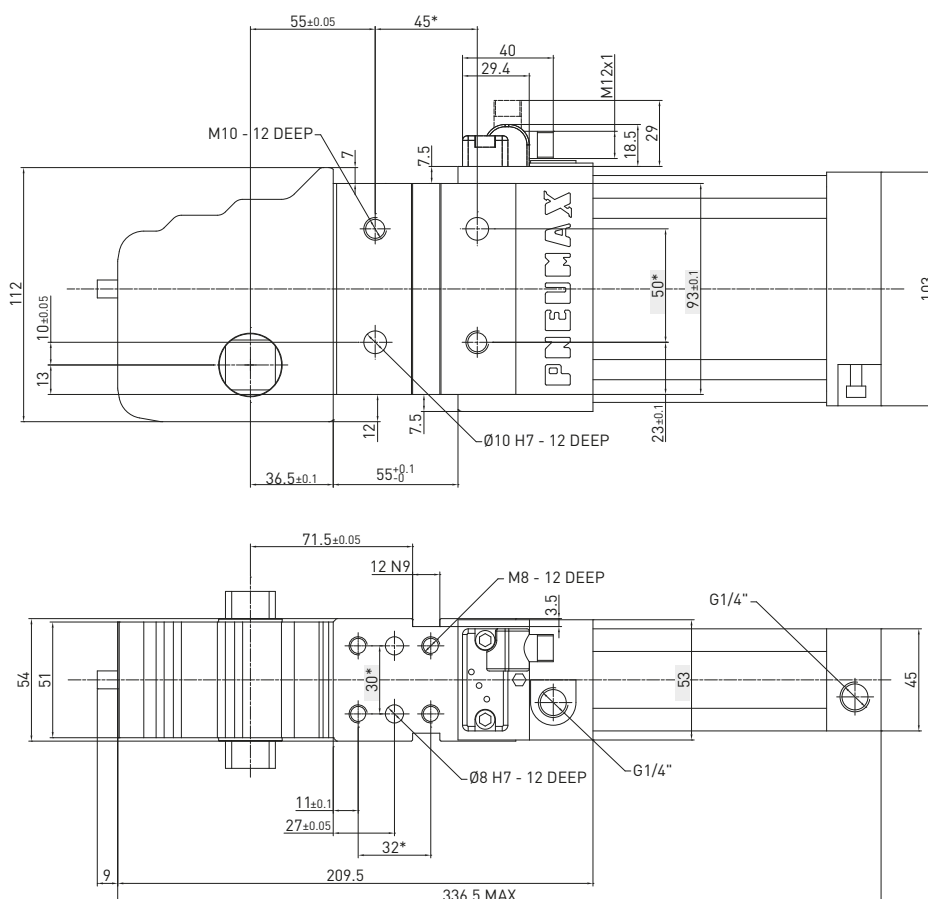



* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 20/09/2018

C2X50E / Clamp with double workpiece identification - NAAMS Std - 50 mm bore

WEIGHT 2.95 kg

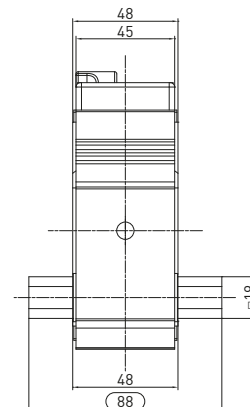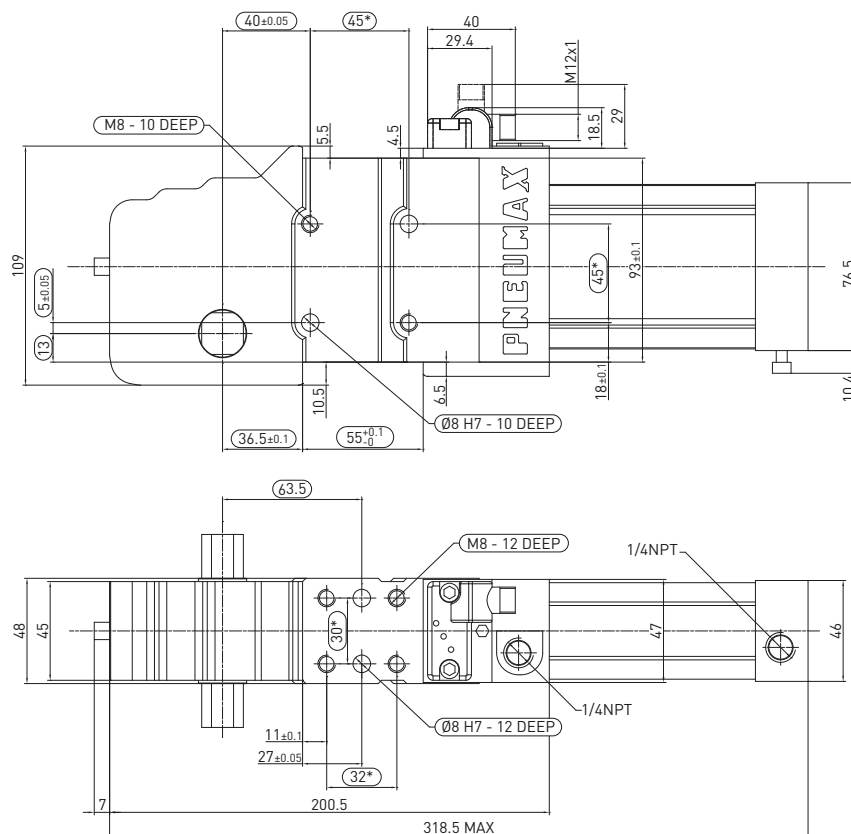



* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 20/09/2018

C2X63E / Clamp with double workpiece identification - NAAMS Std - 63 mm bore

WEIGHT 3.75 kg

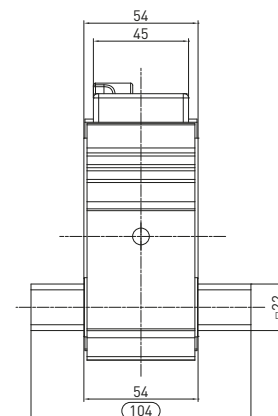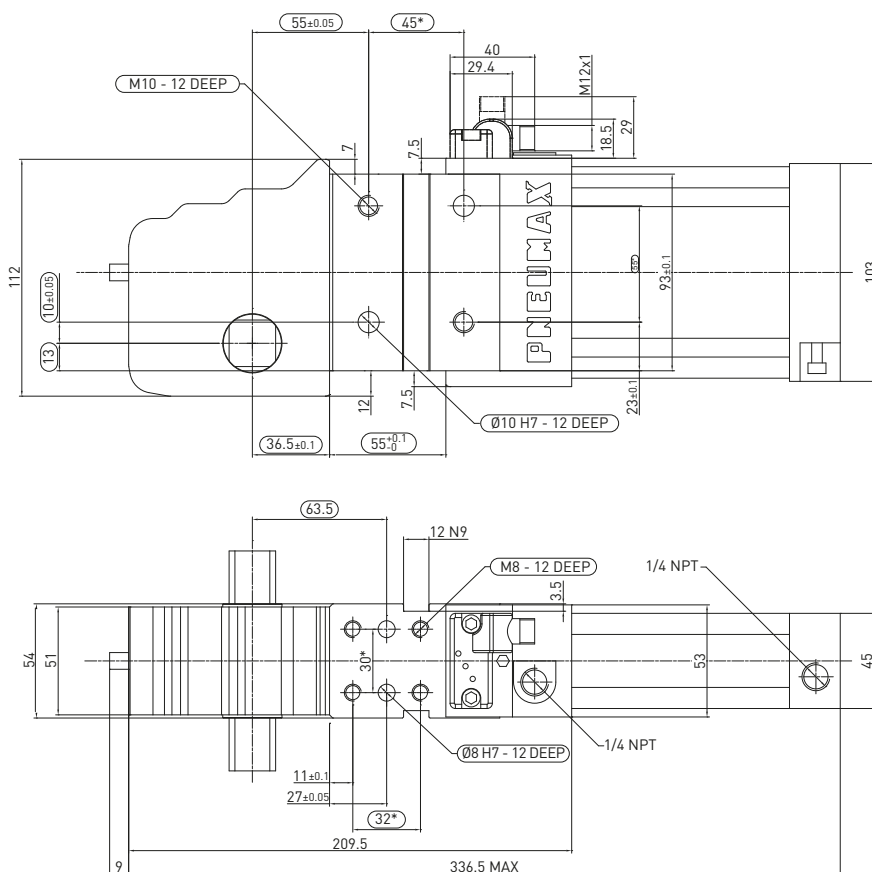


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 20/09/2018

ADWI14: for clamps size 50 and 63 mm / Devices for double workpiece identification - G 1/4"

WEIGHT 100 g

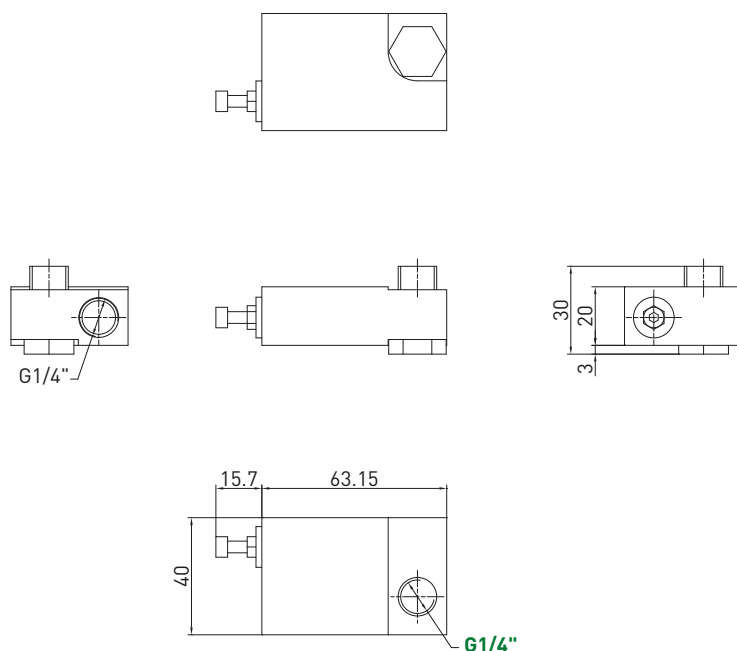


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 20/09/2018

ADWI18: for clamps size 25,32 and 40 mm / Devices for double workpiece identification - G 1/8"

WEIGHT 100 g

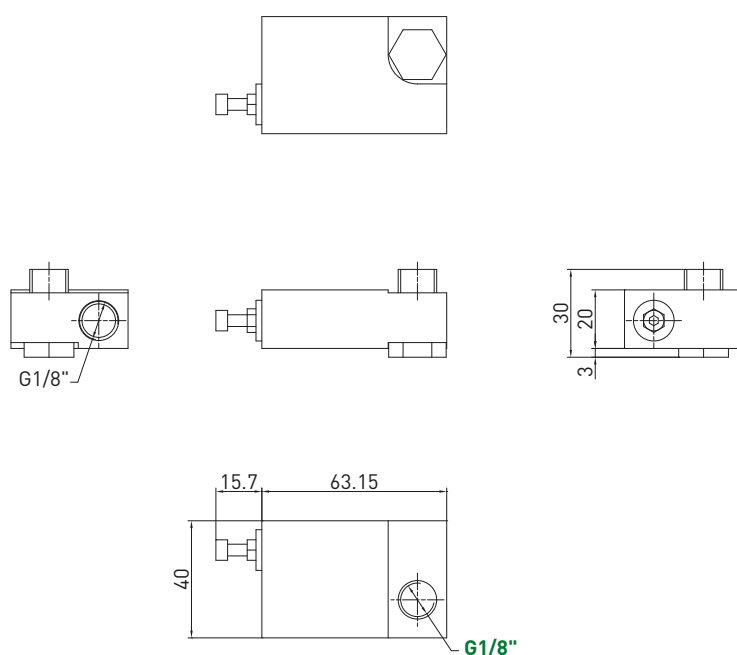


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 20/09/2018

CS/HES-Series

Sealed clamps

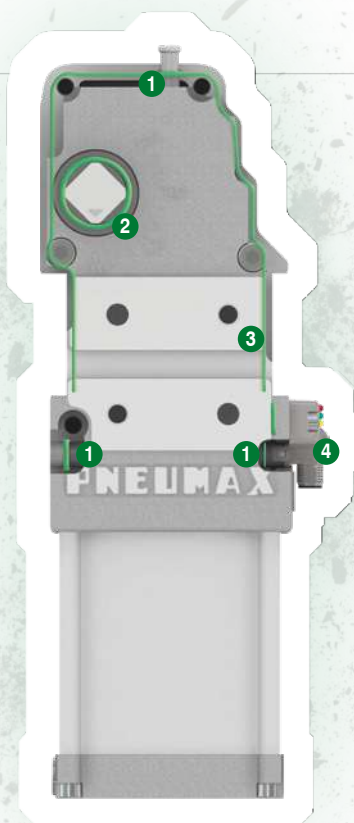

- Weld-contamination proven
- Suitable for laser welding applications
- No dimensional change from conventional clamps

- 1 The manual unlock button and the adjustment access are sealed with an O-ring
- 2 The toggle mechanism is fully sealed
- 3 Acrylic-based Loctite® for full sealing
- 4 IP68 electronic sensor



Ordering string

Sealed clamp

CS 1 P 63 E G 4 S 01

CS

VERSION

C = clamp
CS = sealed clamp

HE = high efficiency clamp
HES = high efficiency sealed clamp

1

MOUNTING PATTERN

P

OPERATION

63

SIZE

E

SENSOR

G

PORTS

4

ARM MOUNT

S

ARM MATERIAL

01


CLAMP ARM TYPE

Follow the ordering string of standard clamps.
For technical specifications please refer to the charts of standard clamps.

CN-Series

Sealed clamps with nickel-plated linkage

INTERNATIONAL
MOUNT
GLOBAL STANDARD COMPONENTS
NAAMS

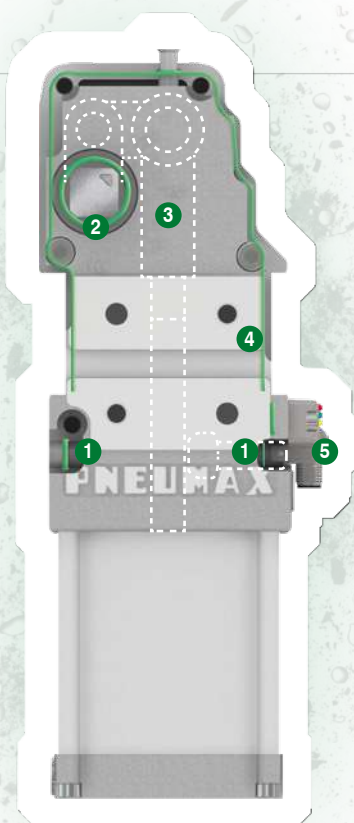

- Weld-contamination proven
- No dimensional change from conventional clamps
- Resistant to corrosion

- 1 Nickel-plated bewel gear
- 2 Nickel-plated shaft
- 3 Nickel-plated linkage
- 4 Acrylic-based Loctite® for full sealing
- 5 IP68 electronic sensor



Ordering string

Sealed clamp

CN **1** **P** **63** **E** **G** **4** **S** **01**

CN

VERSION

CN = sealed clamp with nickel-plated linkage

1

MOUNTING PATTERN

P

OPERATION

63

SIZE

E

SENSOR

G

PORTS

4

ARM MOUNT

S

ARM MATERIAL

01

CLAMP ARM TYPE

Follow the ordering string of standard clamps.
For technical specifications please refer
to the charts of standard clamps.

CB-Series



Power clamp with double arm

- Stepless adjustable opening angle
- Toggle lock mechanism
- Unlock manual override > in case of air loss the clamp can be opened manually
- Pneumatic ports on both sides of the cylinder
- Extremely compact dimensions
- 4-sided mounting pattern

CLAMPING

Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features


Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 40 mm

Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 02/12/2019

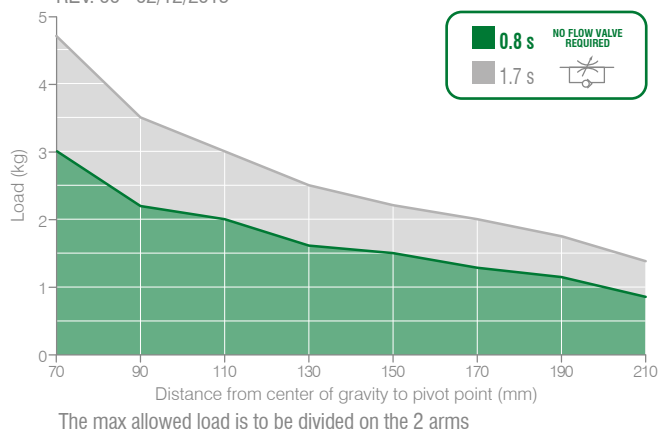


- **Clamping moment (at 5 bar / 72.5 psi)**
85 N m / 62,69 lb·ft
- **Cycle time**
0.8 s at 90°
- **Holding moment**
110 N m

Size 63 mm

Tooling weight chart

5 bar operating pressure – 135° opening angle
REV. 00 - 17/06/2015

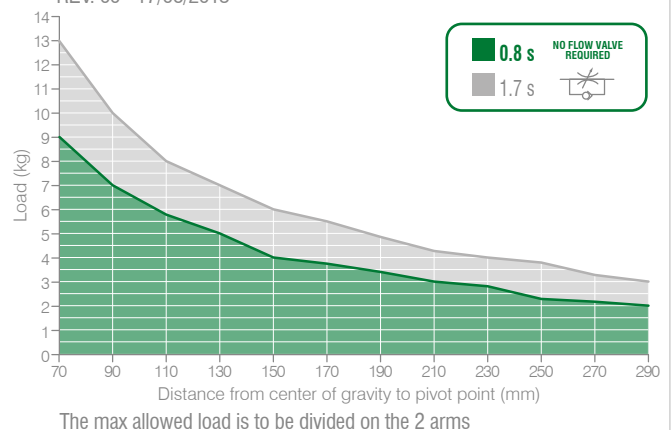



- **Clamping moment (at 5 bar / 72.5 psi)**
170 N m / 125,39 lb·ft
- **Cycle time**
0.8 s at 90°
- **Holding moment**
280 N m

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

Ordering string

CB-Series


CB 40 E G 5 A 01

CB	VERSION	CB = double arm clamp	
40	SIZE	40 = Ø 40 mm 63 = Ø 63 mm	
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP	
G	PORTS	G = G thread – BSPP	
5	ARM MOUNT	5 = 	6* =  * only for size 63 mm
A	ARM MATERIAL	A = aluminum	
01	CLAMP ARM TYPE	01 = wishbone, central, 15 mm offset 02 = wishbone, right, 15 mm offset 03 = wishbone, left, 15 mm offset 61 = wishbone, 10 mm offset specific for CB40 clamp	

Stepless adjustment from 13° to 180° for size 40 mm
Stepless adjustment from 8° to 180° for size 63 mm

CB40EG / Power clamp with double arm - 40 mm bore

WEIGHT 2.5 kg


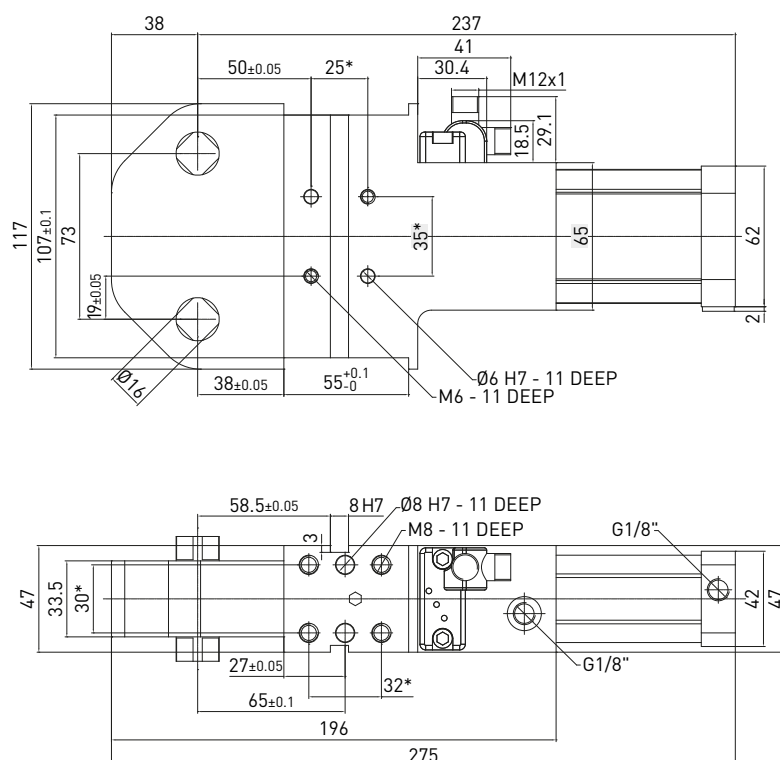


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02
DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 20/09/2018

Clamping arms / 16 mm shaft

REV. 00 - 31/03/2015

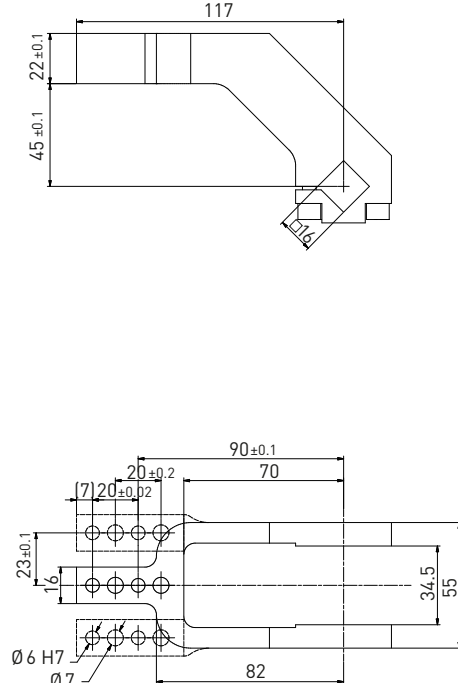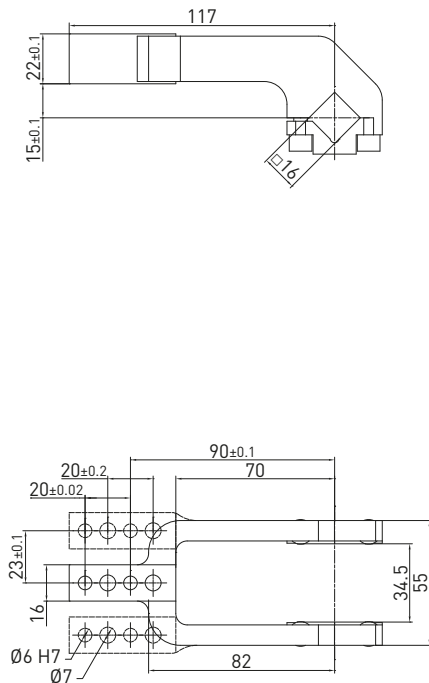

16 mm shaft – 15 mm offset



Part no.	Material	Version	Weight (kg)	Max op. angle pos. 5
B1601	Aluminum	Central	0.24	90°
Q1601	Steel	Central	0.44	90°
B1602	Aluminum	Right	0.24	90°
Q1602	Steel	Right	0.46	90°
B1603	Aluminum	Left	0.24	90°
Q1603	Steel	Left	0.46	90°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

16 mm shaft – 45 mm offset




Part no.	Material	Version	Weight (kg)	Max op. angle pos. 5
B1604	Aluminum	Central	0.3	90°
Q1604	Steel	Central	0.55	90°
B1605	Aluminum	Right	0.3	90°
Q1605	Steel	Right	0.57	90°
B1606	Aluminum	Left	0.3	90°
Q1606	Steel	Left	0.57	90°

Screws: M6x20 Tightening torque: 10 N m / 7.37 lb ft

Clamping arms / 16 mm shaft - 10 mm offset - Specific for CB40 clamps

REV. 00 - 24/09/2019

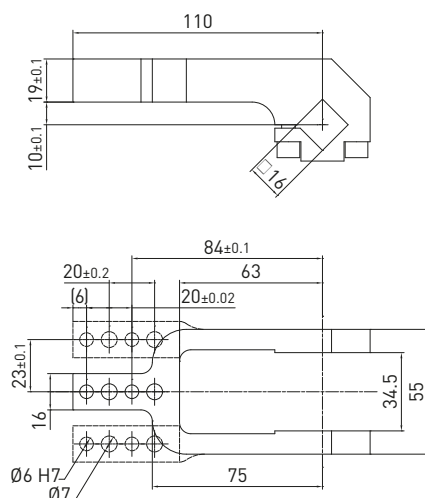

16 mm shaft - 10 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 5	Max op. angle pos. 6
B1661	Aluminum	Central	0.24	90°	90°



Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

16 mm shaft - 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 5	Max op. angle pos. 6
B1618	Aluminum	Central	0.22	90°	90°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb-ft

CB63EG / Power clamp with double arm - 63 mm bore

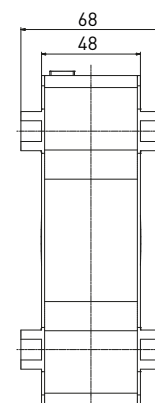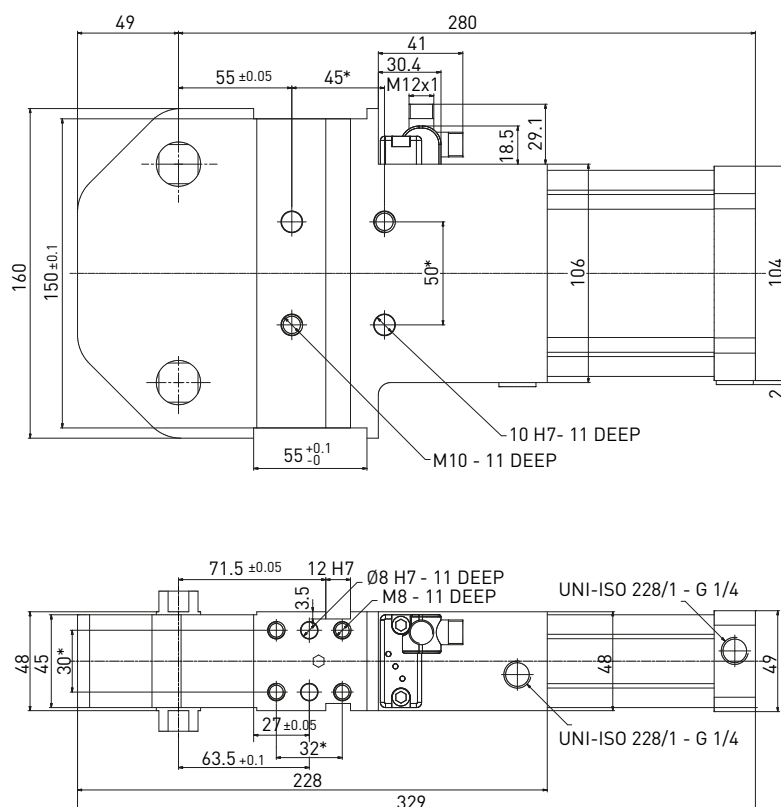
WEIGHT 6 kg


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02
DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 24/09/2019

Clamping arms / 19 mm shaft

REV. 01 - 08/02/2019

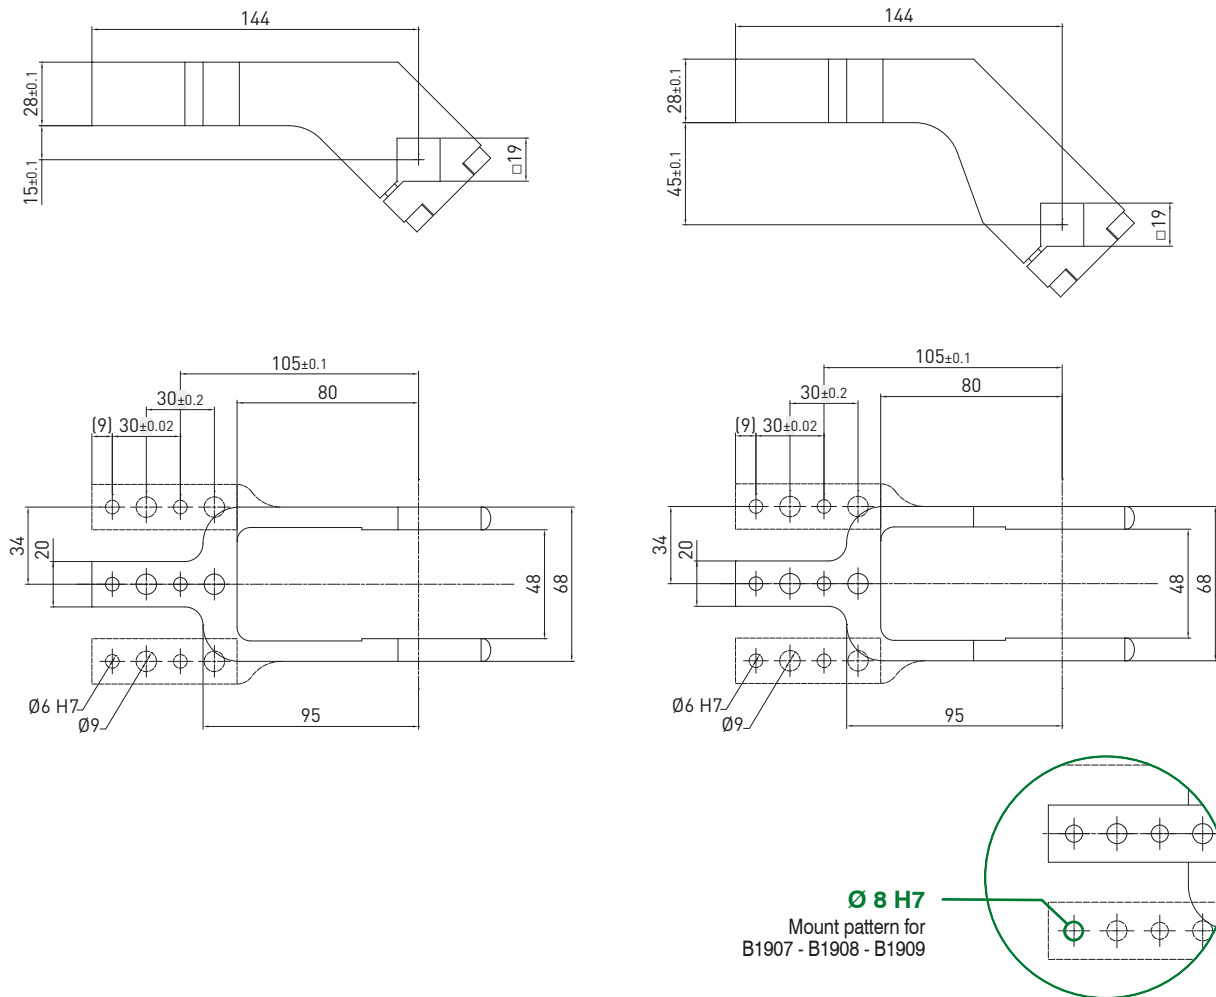

19 mm shaft – 15 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 5	Max op. angle pos. 6
B1901	Aluminum	Central	0.41	90°	90°
Q1901	Steel	Central	0.71	90°	90°
B1902	Aluminum	Right	0.43	90°	90°
Q1902	Steel	Right	0.79	90°	90°
B1903	Aluminum	Left	0.43	90°	90°
Q1903	Steel	Left	0.79	90°	90°
B1907	Aluminum	Central	0.41	90°	90°
B1908	Aluminum	Right	0.43	90°	90°
B1909	Aluminum	Left	0.43	90°	90°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb ft


19 mm shaft – 45 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 5	Max op. angle pos. 6
B1904	Aluminum	Central	0.45	90°	90°
Q1904	Steel	Central	0.77	90°	90°
B1905	Aluminum	Right	0.46	90°	90°
Q1905	Steel	Right	0.81	90°	90°
B1906	Aluminum	Left	0.46	90°	90°
Q1906	Steel	Left	0.81	90°	90°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb ft

Clamping arms / 19 mm shaft

REV. 01 - 08/02/2019

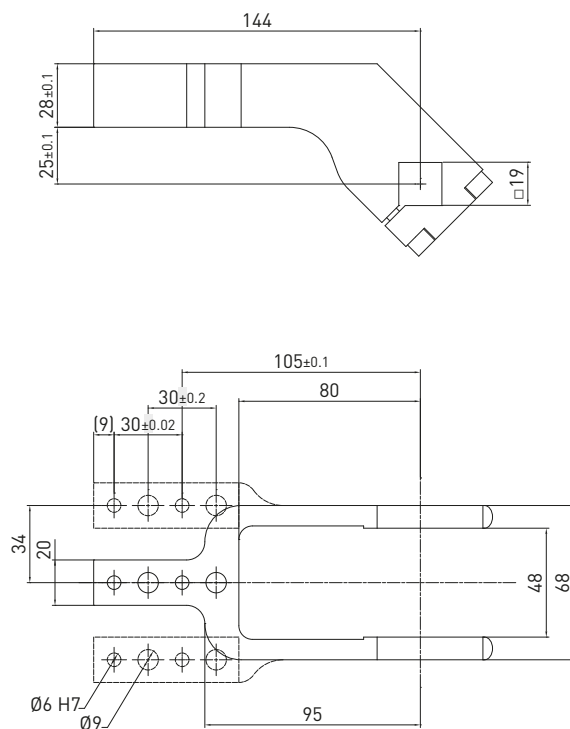

19 mm shaft – 25 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 5	Max op. angle pos. 6
B1921	Aluminum	Central	0.43	90°	90°
B1922	Aluminum	Right	0.44	90°	90°
B1923	Aluminum	Left	0.44	90°	90°

Screws: M6x25 Tightening torque: 10 N m / 7.37 lb ft

CL-Series

Pneumatic clamp



Extra-light
products

550_{gr}
WEIGHT



Miniature light-weight series, enclosed toggle-locking mechanism, compact and light-duty for testing applications, welding and fixture checking.

CLAMPING

Technical features

Manual release button to open the linkage when air pressure is removed during setup.

Operating features


Operating pressure	from 2 to 5 bar / from 30 to 72,5 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 25 mm


• Air consumption

Air consumption for complete cycle (opening and closing)
REV. 00 - 17/06/2015

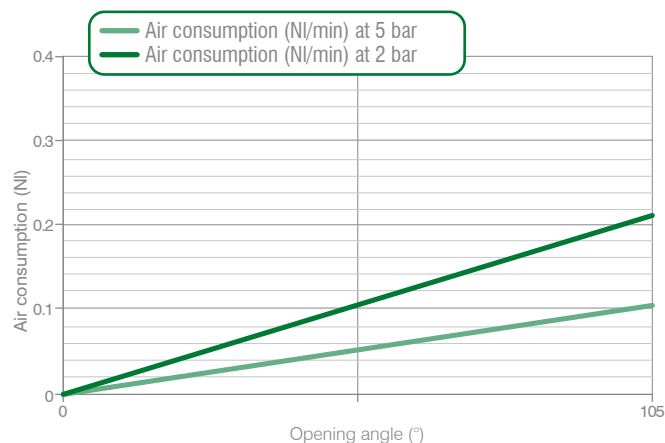

• Tooling weight chart

5 bar operating pressure – 105° opening angle
REV. 00 - 18/11/2016

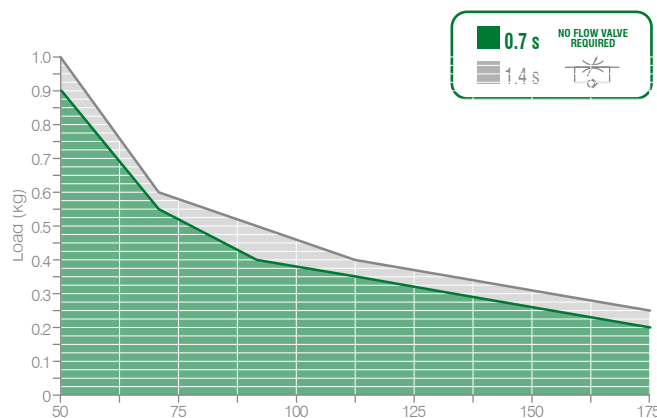

- **Clamping moment (at 5 bar / 72.5 psi)**
25 N m / 18,43 lb·ft

- **Holding moment**
50 N m / 36,87 lb·ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time.
For applications which exceed the above data, please contact our sales representatives.

CL-Series / Ordering string

CL-Series



C L 25 E G 1 A 01

C	VERSION	C = clamp
L	SERIES	L = light - Weight
25	SIZE	25 = Ø 25 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP
1	ARM MOUNT	1 =  2 =  3 =  4 = 
A	ARM MATERIAL	A = aluminum
01	CLAMP ARM TYPE	01 = wishbone, central, 0 mm offset 13 = H, 0 mm offset 04 = wishbone, central, 10 mm offset 14 = H, 10 mm offset

Please see the charts in the datasheets for arm position
as well as for max. opening angle.
NAAMS clamping arms to be ordered separately

CL25EG / Light - weight - pneumatic clamp - size 25 mm

WEIGHT 550 gr

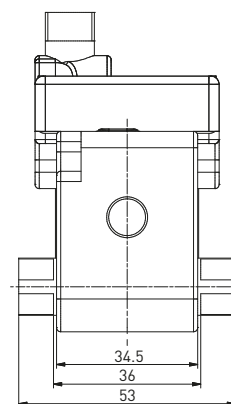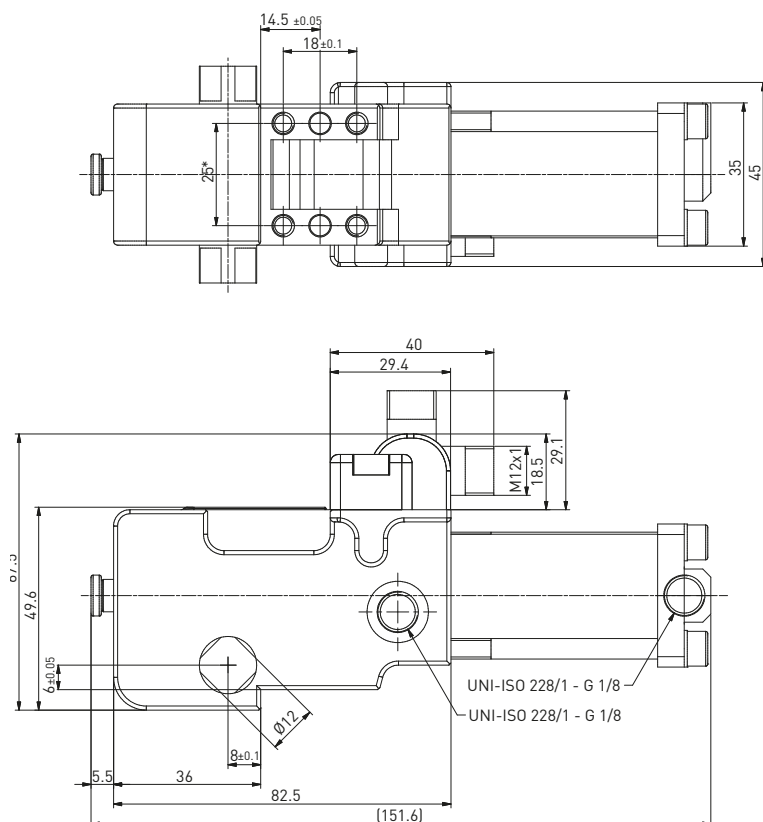



* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 14/06/2021

Clamping arms / 12 mm shaft for clamps' size 25 mm

REV. 02 - 07/10/2015

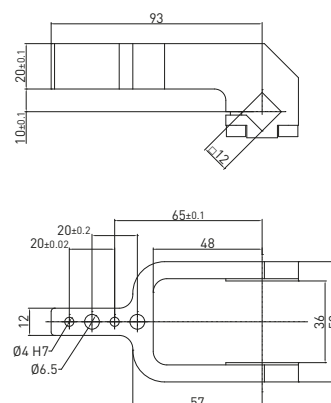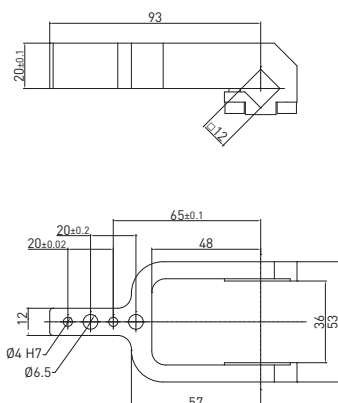

12 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B12012	Aluminum	Central	0.127	105°	105°	105°	N/A

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft



12 mm shaft – 10 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B12042	Aluminum	Central	0.135	105°	105°	N/A	N/A

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

Clamping arms / 12 mm shaft for clamps' size 25 mm and size 32 mm mm - Left & right clamping surfaces

REV. 00 - 12/04/2017

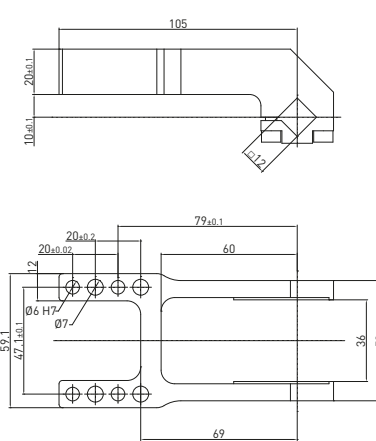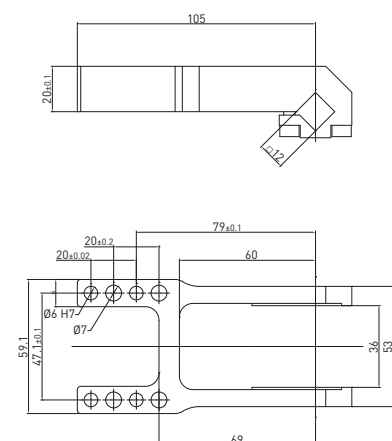

12 mm shaft – 0 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1213	Aluminum	H	0.163	105°	105°	N/A	N/A

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

12 mm shaft – 10 mm offset

Part no.	Material	Version	Weight (kg)	Max op. angle pos. 1	Max op. angle pos. 2	Max op. angle pos. 3	Max op. angle pos. 4
B1214	Aluminum	H	0.173	105°	105°	N/A	N/A

Screws: M5x14 Tightening torque: 5 N m / 3.68 lb ft

HC-Series

Hydraulic clamps



Hydraulic power clamps with **fully-enclosed mechanism**. Maximum mechanical advantage and compact dimensions. Heavy-duty sealed clamps provide superior clamping forces in **harsh welding environments**. Efficient and consistent for repetitive production operations. Sturdy toggle-linkage mechanism and industry-proven position monitoring: the sensor detects the actual linkage condition. **High performance and maintenance-free bushings**.

Technical features


90° opening angle

Operating features

Operating pressure	Nominal pressure 75 bar; max pressure 150 bar
Fluid temperature	-20 °C ÷ + 80°C
Fluid	Hydraulic mineral oil
Weight	5,5 Kg

Functional charts

• Tooling weight chart

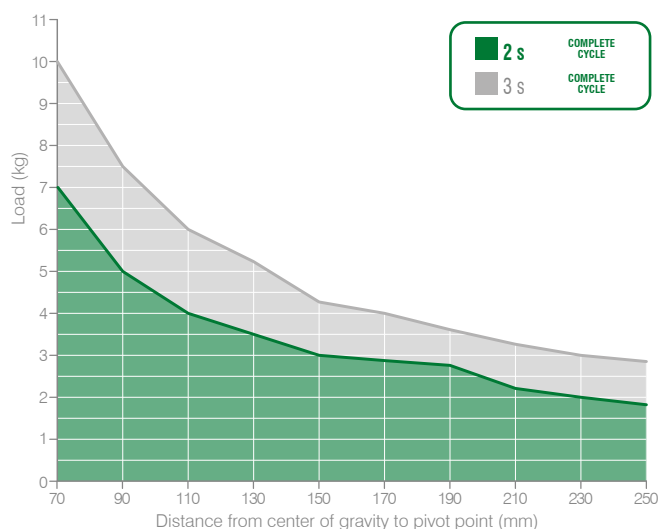

• Clamping moment 580 N m at 75 bar

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.


Make sure that the opening movement is cushioned through flow adjusters.

Ordering string

Hydraulic Power Clamps

HC 1 A G 1 S 01

HC	VERSION	HC = hydraulic clamp	
1	SIZE	1 = Ø25 mm bore; 19 mm arm shaft	
A	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP	
G	PORTS	G = G thread – BSPP	
1	ARM MOUNT	1 =  2 =  3 =  4 = 	
S	ARM MATERIAL	S = steel	
01	CLAMP ARM TYPE	01 = wishbone, central, 15 mm offset 04 = wishbone, central, 45 mm offset 02 = wishbone, right, 15 mm offset 05 = wishbone, right, 45 mm offset 03 = wishbone, left, 15 mm offset 06 = wishbone, left, 45 mm offset	

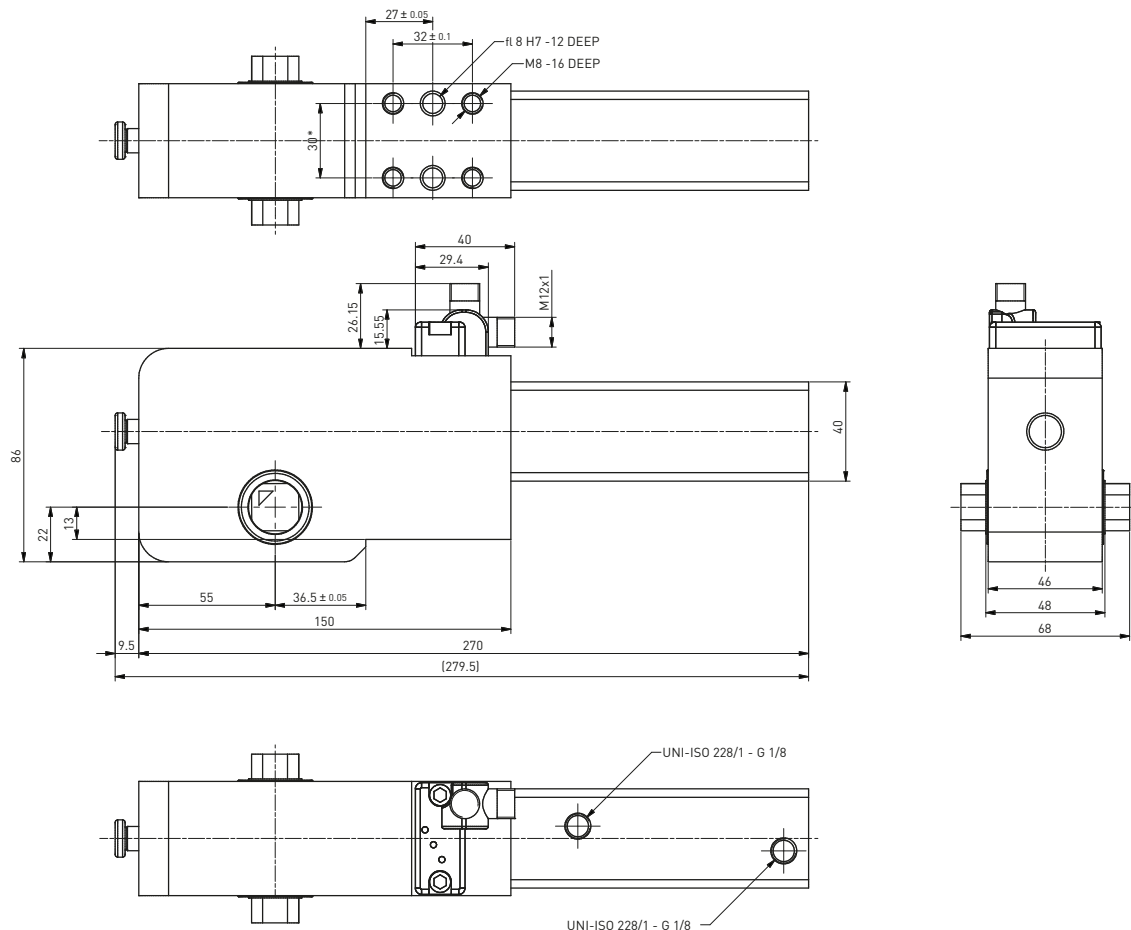HC1 / International mount - 25 mm bore

REV. 00 - 15/06/2021

Clamping

Quick installation guide



Caution

Any maintenance operation may only be carried out by qualified and authorized personnel. For any reason, do not reach into the pivoting range of the clamping arms, when the clamps are in operation. Disconnect and lock out pneumatic and electric supply lines before operating on or around clamps.

Functional description

When operated, the pneumatic cylinder acts on an integrated toggle mechanism, which triggers the pivoting movement of the clamping arms.

The clamp is warranted for 3 mln cycles in correct operating conditions

No lubrication.

No preventive maintenance.

External cleaning with non-corrosive detergents is required: cleaning interval depends on the ambient conditions as well as on the frequency of use.



Clamp installation to the tool

The clamp can be installed by one of its four mounting surfaces, using dowels and screws according to its datasheet. The tightening torques to be set are:

M5	5 N m / 3.68 lb·ft
M6	10 N m / 7.37 lb·ft
M8	25 N m / 18.43 lb·ft
M10	35 N m / 25.81 lb·ft
M12	50 N m / 36.87 lb·ft

Use the key support surfaces, where available.
Always use all the bores on the mounting pattern.

A worksheet for the right sizing of the clamp is available upon request. Visit our website for technical documents

<http://automotive.pneumax.it/>




Pressure operating range: from 2 to 8 bar/ from 30 to 115 psi.
Inline lubrication isn't required: if lubricated air is used, it is necessary to continue using lubricated air, as the oil in it may have removed the basic lubrication in the device.

Electronic sensor

ES001 is used for all clamps' sizes and series. Adjustment of the connector: unscrew the tightening screw and set the connector in the required position, then secure the screw with 5 N m / 3.68 lb·ft.


Technical features

Operating voltage	10-30 VDC
Voltage drop	≤ 2 V
Load current	≤ 100 mA
Current consumption	≤ 30 mA
Short-circuit protection	protected
Protection rating	IP68
Operating temperature	-0 °C +50 °C
Storage temperature	-25 °C +60 °C
Electromagnetic compatibility	EN IEC 60947-5-2
Power supply indication	green LED
Open position indication	yellow LED
Closed position indication	red LED
Digital output type	PNP

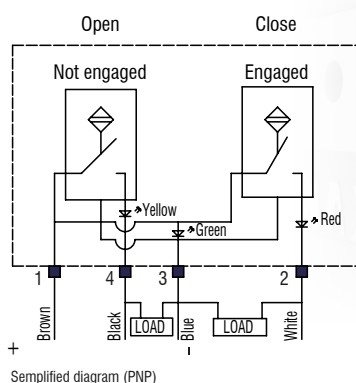


To replace the sensor, remove the M5 screw and assemble a new one by tightening the same screw with 5 N m / 3.68 lb·ft.


Arm mount options




Position ①



Position ②



Position ③



Position ④

The above pictures show the closed position.


The max. opening angle according to the arm mount option is indicated on each clamp arm's datasheet. In order to achieve a right or left arm mount in configurations 2 or 3, the clamping arm should be rotated by 180°, therefore to achieve

C1P/HE1P __ 2A03 a right clamp arm is required, i.e. B/Q __ 02


C1P/HE1P __ 2A02 a left clamp arm is required, i.e. B/Q __ 03

C1P/HE1P __ 2A05 a right clamp arm is required, i.e. B/Q __ 06

C1P/HE1P __ 2A06 a left clamp arm is required, i.e. B/Q __ 05

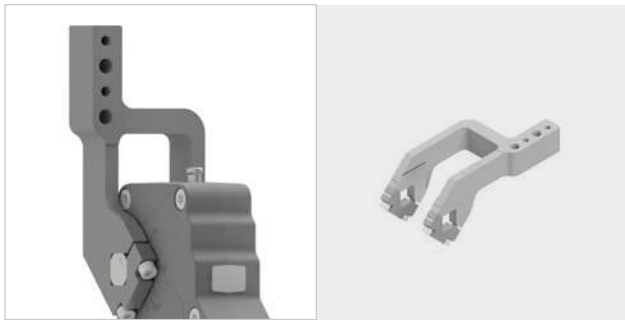

C1 __ 2A03 using a right __ 02 arm

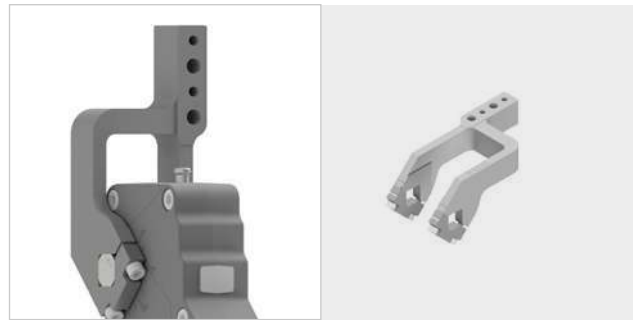

C1 __ 2A02 using a left __ 03 arm

Clamping arm mount

The sides of the brackets have two different heights. Assemble the brackets to the side of the clamping arm, so that the surfaces, where the side mark has been machined on, will match. Secure, at first, the screw on the mark side ① by setting the tightening torques indicated on the clamping arm datasheet, and leave no gap between the bracket and the arm. Then, secure the other screw ②: in this case, due to the different length of the sides of the brackets, a gap between the same and the clamping arm will be noticed. Always use locking washers.



Handles with knobs for manual levers

RK7100/0015 Handle with green knob and bracket;
D2 version for 25 and 32 mm bore clamps
and manual pin packages RD250 and FD63

RK7100/0005 Handle with green knob and bracket;
D1 version for 40 mm bore clamps

RK7100/0006 Handle with green knob and bracket;
D2 version for 40 mm bore clamps

RK7100/0003 Handle with green knob and bracket;
D1 version for 50 and 63 mm bore clamps

RK7100/0004 Handle with green knob and bracket;
D2 version for 50 and 63 mm bore clamps


RK7100/0007 Handle with green knob and bracket;
D2 version for 80 mm bore clamps

The levers' kits include handle knob, bracket and M5 x 16 screws. Tightening torque: 5 N m/ 3.68 lb-ft.

The handles can be installed on the left or on the right side of the clamps- all manual clamps show a dual output shaft.

Opening angle adjustment


The clamping arm must be in the open position. Insert a 5 mm hexagonal flat Allen Wrench or a screw gun and adjust the opening position to the required opening angle.

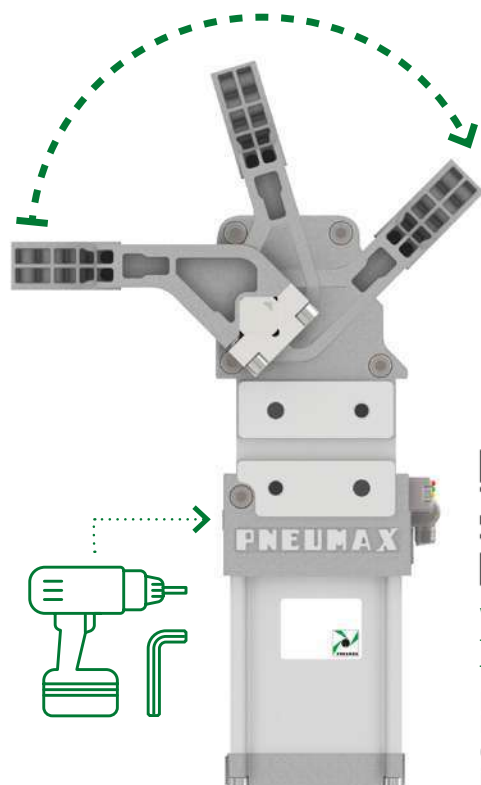

Visit our website
for a video of
the adjustment
procedure.
**No adjustment
of the sensor
is required.**

Manual release button

To manually unlock the mechanism, hit the bolt with a rubber mallet. The linkage will automatically release itself from the over-centre position. To close the clamps during set-up operations, without air, use a screw gun or a flat Allen wrench to engage the adjustment means and adjust the clamp till 0° opening angle: the linkage will be toggle-locked as the manual release button is completely outside.

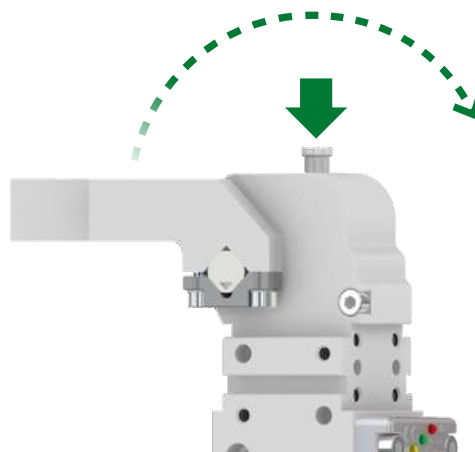


No need to disassemble the cylinder to rotate the ports' position

Supply-ports on both sides of the cylinder for a simpler set-up.

Auto-retaining device

For mounting installations, where the load is subject to gravity force and could move from the clamp opening position, an auto-retaining device could be used. Please refer to our website for the respective documentation, under the accessories section. AR- series.

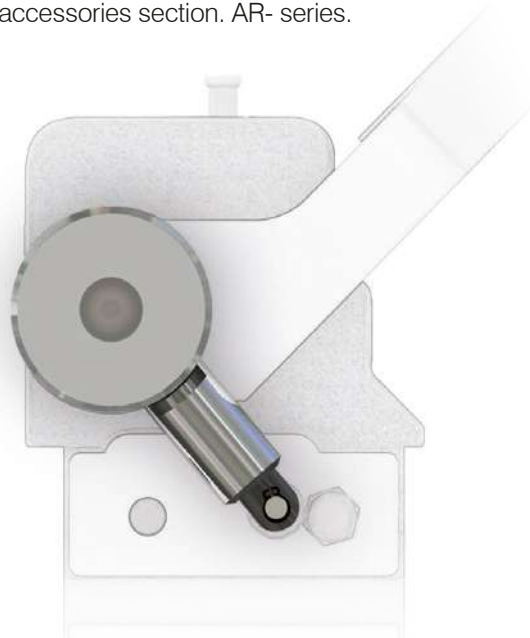

Shims and spacers

For an optimal setting of the clamping force, proceed as follows: place the NC blocks until contact is made with the workpiece, close the clamp and verify that the linkage is toggle-locked by checking that the release bolt is completely outside. Proceed by adding shims or spacers till the gap between the workpiece and the NC block is 0 mm, then add further shims so that the required clamping force is achieved. 0.3 mm shimming is the average interference recommended: please consider that the thickness of the shim to be chosen depends on the air pressure as well as on the clamping arm's length and clamp size. For any specific requirement, please contact our technical representatives at automotive@pneumaxspa.com.




Locating

High locating accuracy.
High protection against welding debris and corrosion.



Extra-light products

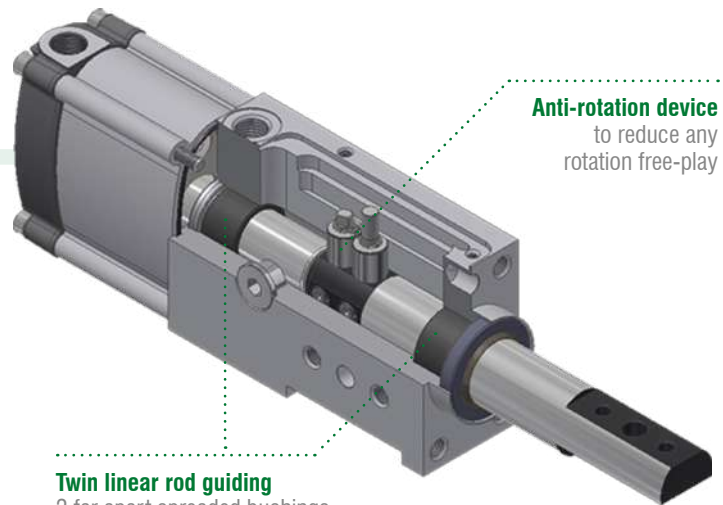

Anti-rotation device
to reduce any rotation free-play

Twin linear rod guiding
2 far apart spreaded bushings limit any deflection and improve the pin package accuracy over a long period of time.

LOCATING



RP50 RP63 RM50 HP50 RD50 RT40 RTD40 RCD250 RC50 RC63 FP40 FP63 FT50 FTD50 RP32 RA32
CNOMO

High positioning accuracy level

Precise guiding through 2 far-apart spreaded bushings for an optimal support of the rods > twin piston rod guide

- Low deflection
- Efficient anti rotation mechanism

Long life built-in components in rust prevention

- No weld covers or bellows required
- Steel and brass rod scraper to prevent welding debris from entering the pin package
- Chrome rod coating as a protection against adhering weld sparks

High resistance to welding debris and corrosion

Anti-rotation system to reduce any rotation free-play

Locating products

Dual rods

- Extra-light products
- Short body length
- Clear design with user-friendly surfaces and no dirt or welding deposit traps



Nano pin packages



2-sided mounting option

Supply ports on 3 sides



Front
mount



Rear
mount



G ports
on 3 sides

High performance pin package

The heat generated from any welding process can cause a localized deformation in the workpiece when the metal cools, some parts could contract more than others, leaving residual stress.

To improve the process reliability, a higher level of pull force to disengage the pin can be required to overcome the tensions in the workpiece.

Pull force:
1960N



Cnomo

Pin packages according to Cnomo standard also available with manual operation.

CNOMO



Retractable locating pin packages with toggle linkage

- Fully encapsulated toggle mechanism: in case of air loss, the working position remains secure
- Clear design with user-friendly surfaces



Retractable locating pin packages with dual rods and toggle linkage

- Fully encapsulated toggle mechanism: in case of air loss, the working position remains secure
- Clear design with user-friendly surfaces and no dirt or welding deposit traps




Retractable locating pin packages with toggle linkage and manual operation

- Manual unlock mechanism to disengage the linkage in emergency situations



Retractable locating pin packages with dual rods, toggle linkage and manual operation

- Manual unlock mechanism to disengage the linkage in emergency situations

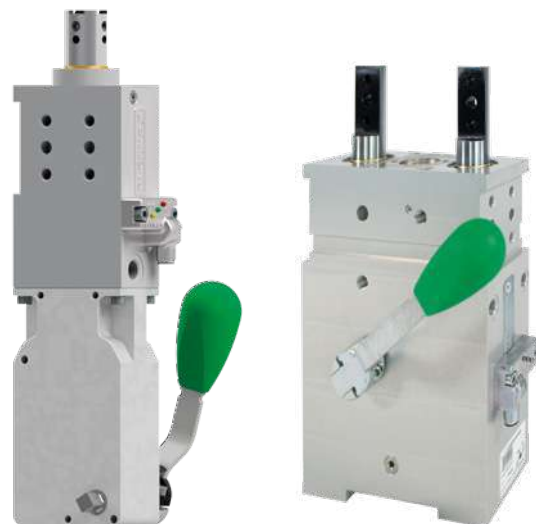

R-Series

Retractable locating pin packages



Technical features

Pneumatic ports on both sides of the cylinder.

Operating features

Operating pressure from 2 to 8 bar / from 30 to 115 psi

Lubrication all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 63 mm

• Max deflection

Stroke	Load (kg)	Load position deviation (mm) A	Load position deviation (mm) B	Load position deviation (mm) C
60 mm	0.5	0.007	0.012	0.01
	1	0.013	0.025	0.023
	1.5	0.02	0.04	0.036
	2	0.03	0.053	0.049
	2.5	0.038	0.067	0.064
	3	0.045	0.082	0.075
50 mm	0.5	0.006	0.009	0.007
	1	0.013	0.02	0.018
	1.5	0.021	0.032	0.028
	2	0.026	0.047	0.043
	2.5	0.032	0.66	0.057
	3	0.037	0.075	0.068
40 mm	0.5	0.004	0.009	0.004
	1	0.009	0.02	0.009
	1.5	0.013	0.032	0.013
	2	0.018	0.047	0.018
	2.5	0.022	0.66	0.022
	3	0.026	0.075	0.026
25 mm	0.5	0	0.005	0
	1	0.005	0.015	0.005
	1.5	0.007	0.032	0.007
	2	0.011	0.047	0.011
	2.5	0.012	0.66	0.012
	3	0.014	0.075	0.014
15 mm	0.5	0	0.005	0
	1	0.002	0.018	0
	1.5	0.004	0.025	0.002
	2	0.007	0.033	0.006
	2.5	0.012	0.043	0.009
	3	0.014	0.052	0.013

• Cycle time for max stroke


< 0.8 s NO flow valve required

• Functional data (at 5 bar / 72.5 psi)

Thrust force	1,400 N
Pull force	1,555 N
Max bending moment	3 N m / 2.21 lb-ft
Max distance from the load centre to the rod	200 mm


• Air consumption for complete cycle

REV. 00 - 31/03/2015

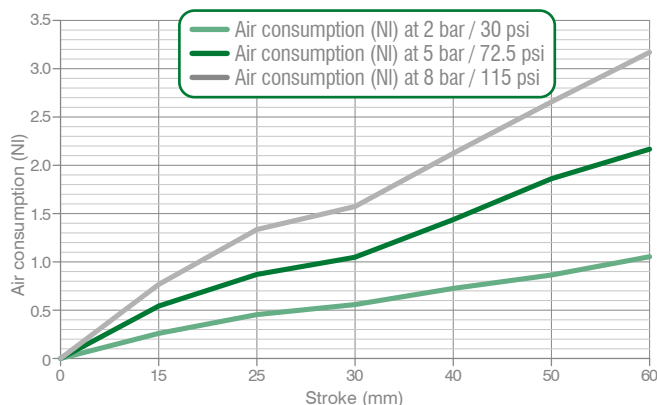


Load position **A**

Horizontal mounting position of the retractable locating pin/load centre on the rod




Load position **B**

Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Load position **C**

Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Please get in touch with our technical representatives for any application which exceeds the above values, to find the appropriate solution for your application.

Size 50 mm

• Max deflection

Stroke	Load (kg)	Load position A deviation (mm)	Load position B deviation (mm)	Load position C deviation (mm)
60 mm	0.5	0.007	0.012	0.01
	1	0.013	0.025	0.023
	1.5	0.02	0.04	0.036
	2	0.03	0.053	0.049
	2.5	0.038	0.067	0.064
	3	0.045	0.082	0.075
50 mm	0.5	0.006	0.009	0.007
	1	0.013	0.02	0.018
	1.5	0.021	0.032	0.028
	2	0.026	0.047	0.043
	2.5	0.032	0.066	0.057
	3	0.037	0.075	0.068
40 mm	0.5	0.004	0.009	0.004
	1	0.009	0.02	0.009
	1.5	0.013	0.032	0.013
	2	0.018	0.047	0.018
	2.5	0.022	0.066	0.022
	3	0.026	0.075	0.026
25 mm	0.5	0	0.005	0
	1	0.005	0.015	0.005
	1.5	0.007	0.032	0.007
	2	0.011	0.047	0.011
	2.5	0.012	0.066	0.012
	3	0.014	0.075	0.014
15 mm	0.5	0	0.005	0
	1	0.002	0.018	0
	1.5	0.004	0.025	0.002
	2	0.007	0.033	0.006
	2.5	0.012	0.043	0.009
	3	0.014	0.052	0.013

• Cycle time for max stroke


< 0.8 s NO flow valve required

• Functional data (at 5 bar / 72.5 psi)

Thrust force	825 N
Pull force	980 N
Max bending moment	3 N m / 2.21 lb-ft
Max distance from the load centre to the rod	200 mm

• Air consumption for complete cycle

REV. 00 - 18/06/2015

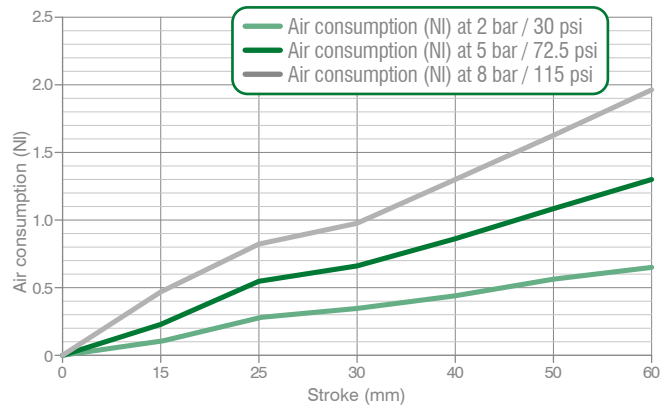


Load position A	Load position B	Load position C
Horizontal mounting position of the retractable locating pin/load centre on the rod	Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis	Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis

Size 32 mm

• Max deflection

Stroke	Load (kg)	Load position A deviation (mm)	Load position B deviation (mm)	Load position C deviation (mm)
20 mm	0.5	0.003	0.024	0.008
	1	0.006	0.059	0.01
	1.5	0.015	0.097	0.033
40 mm	0.5	0.004	0.038	0.012
	1	0.011	0.081	0.025
	1.5	0.02	0.164	0.037

• Air consumption for complete cycle

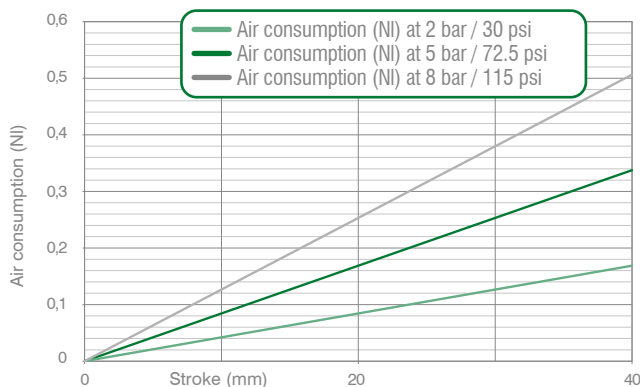

• Functional data (at 5 bar / 72.5 psi)

Thrust force	250 N
Pull force	150 N
Max bending moment	1.6 N m / 1.1 lb-ft
Max distance from the load centre to the rod	100 mm

• Cycle time for max stroke

< 0.8 s NO flow valve required

Load position A	Load position B	Load position C
Horizontal mounting position of the retractable locating pin/load centre on the rod	Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis	Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis

Please get in touch with our technical representatives for any application which exceeds the above values, to find the appropriate solution for your application.

R-Series / Ordering string
R_32-Series
R P 32 E 20 G 2

LOCATING

R	VERSION	R = retractable locating pin package
P	OPERATION	P = pneumatic – sensor mounted on the end cap A = pneumatic – sensor mounted on the front side
32	SIZE	32 = Ø 32 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
20	STROKE	20 = 20 mm 40 = 40 mm
G	PORTS	G = G thread – BSPP
2	ROD TERMINATION	1 = iØ 16 mm cross-cut key rod termination 2 = iØ 10 mm cross-cut key rod termination


Rod 1

Rod 2


R_50/63-Series

R P 50 E 40 G 3 1



R	VERSION	R = retractable locating pin package
P	OPERATION	P = pneumatic D2 = pneumatic with manual operation (available in size 50)
50	SIZE	50 = Ø 50 mm 63 = Ø 63 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
40	STROKE	15 = 15 mm 25 = 25 mm 40 = 40 mm 50 = 50 mm 60 = 60 mm
G	PORTS	G = G thread – BSPP
3	ROD TERMINATION	1 = iØ 16 mm cross-cut key rod termination 2 = iØ 10 mm cross-cut key rod termination 3 = rod termination for offset pins 4 = rod termination with key 5 = rod with flat termination dia. 10 mm 6 = rod with flat termination dia. 12 mm 7 = iØ 12 mm CNOMO termination 8 = iØ 20 mm CNOMO termination



1	ROD ORIENTATION (for termination type 3)	1 = 	2 = 	3 = 	4 = 
----------	---	--	--	--	--



2	ROD ORIENTATION (for termination type 8)	- = 	2 = 
----------	---	--	--



RM250-Series


R M2 50 E 15 3 1

R	VERSION	R = retractable locating pin package
M2	OPERATION	M2 = manual operation - handle included
50	SIZE	50 = body corresponding to size 50
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
15	STROKE	15 = 15 mm 25 = 25 mm 40 = 40 mm 50 = 50 mm 60 = 60 mm
3	ROD TERMINATION	1 = iØ 16 mm cross-cut key rod termination 2 = iØ 10 mm cross-cut key rod termination 3 = rod termination for offset pins 4 = rod termination with key 5 = rod with flat termination dia. 10 mm 6 = rod with flat termination dia. 12 mm 7 = iØ 12 mm CNOMO termination 8 = iØ 20 mm CNOMO termination




Rod 1 Rod 2 Rod 3 Rod 4 Rod 5 Rod 6 Rod 7 Rod 8

1	ROD ORIENTATION (for termination type 3)	1 = 2 = 3 = 4 =
----------	---	---

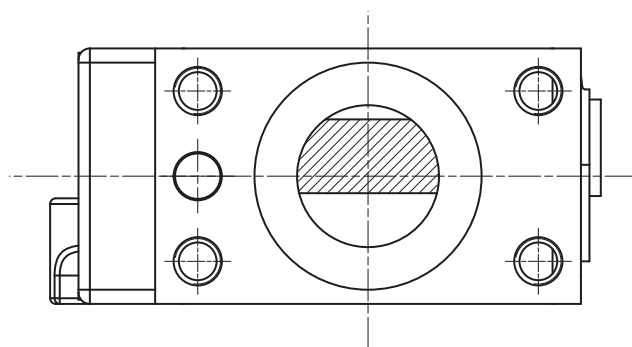

RP32E_1 / Retractable locating pin package - Size 32 mm - iØ 16 mm cross-cut key rod termination

WEIGHT 0.88 kg
min. stroke version

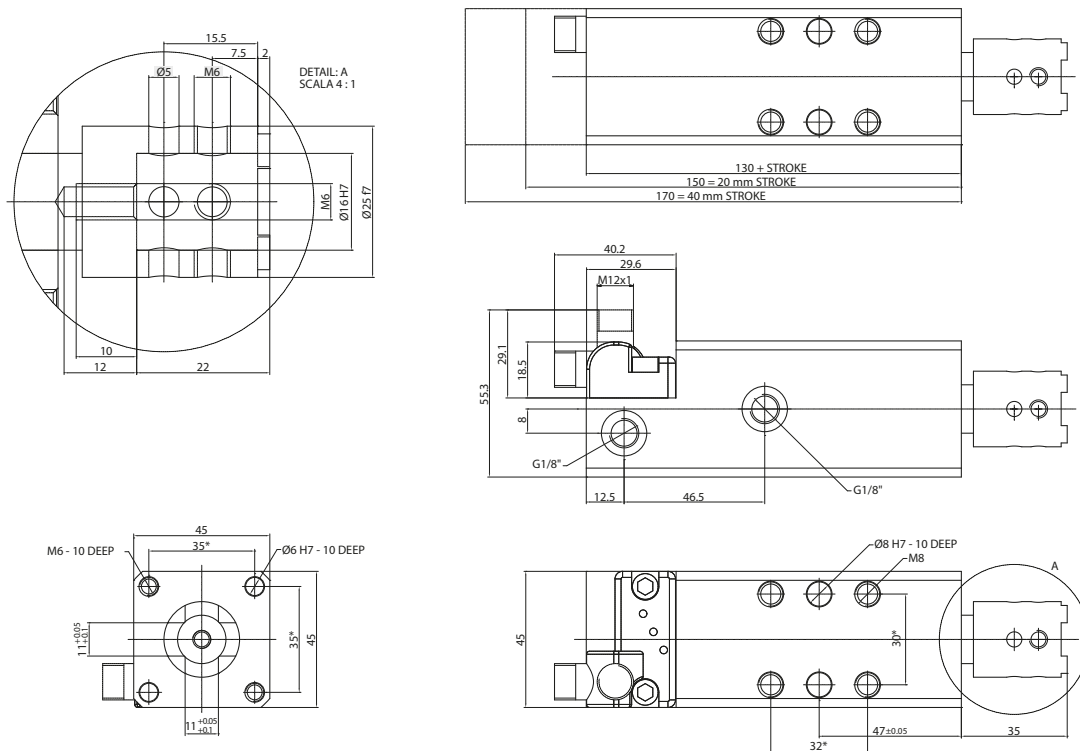


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 07/03/2017

RP32E_2 / Retractable locating pin package - Size 32 mm - iØ 10 mm cross-cut key rod termination

WEIGHT 0.88 kg
min. stroke version

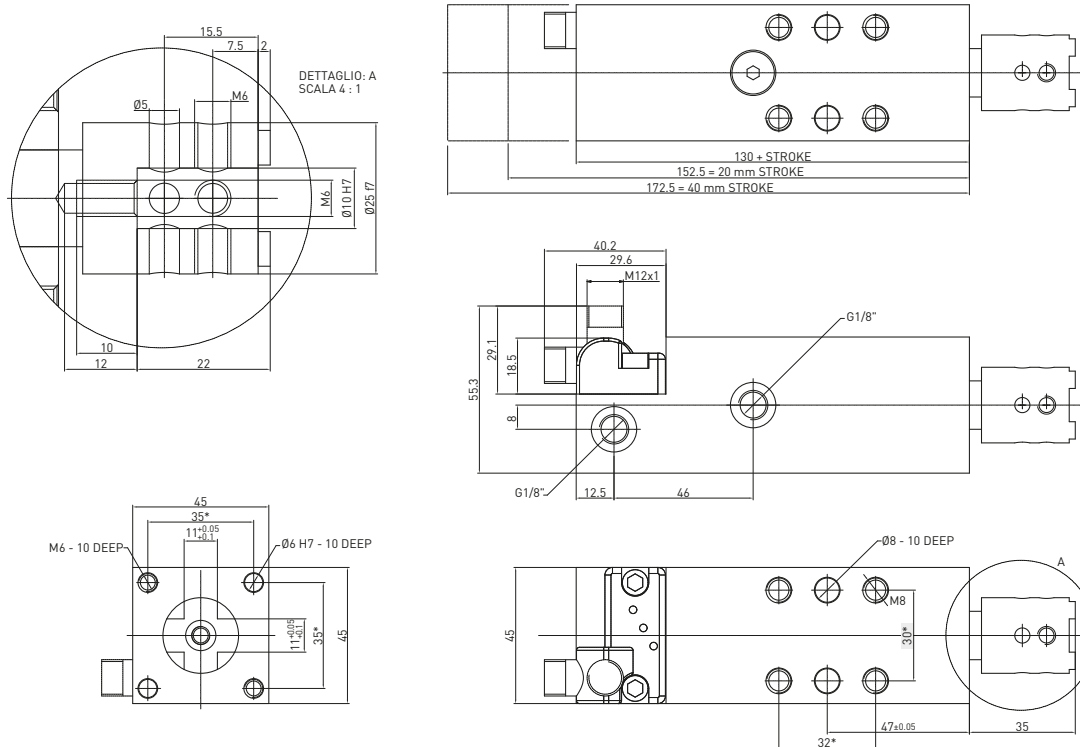


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 00/00/0000

RA32E _1 / Retractable locating pin package - Size 32 mm - iØ 16 mm cross-cut key rod termination

WEIGHT 0.94 kg
min. stroke version

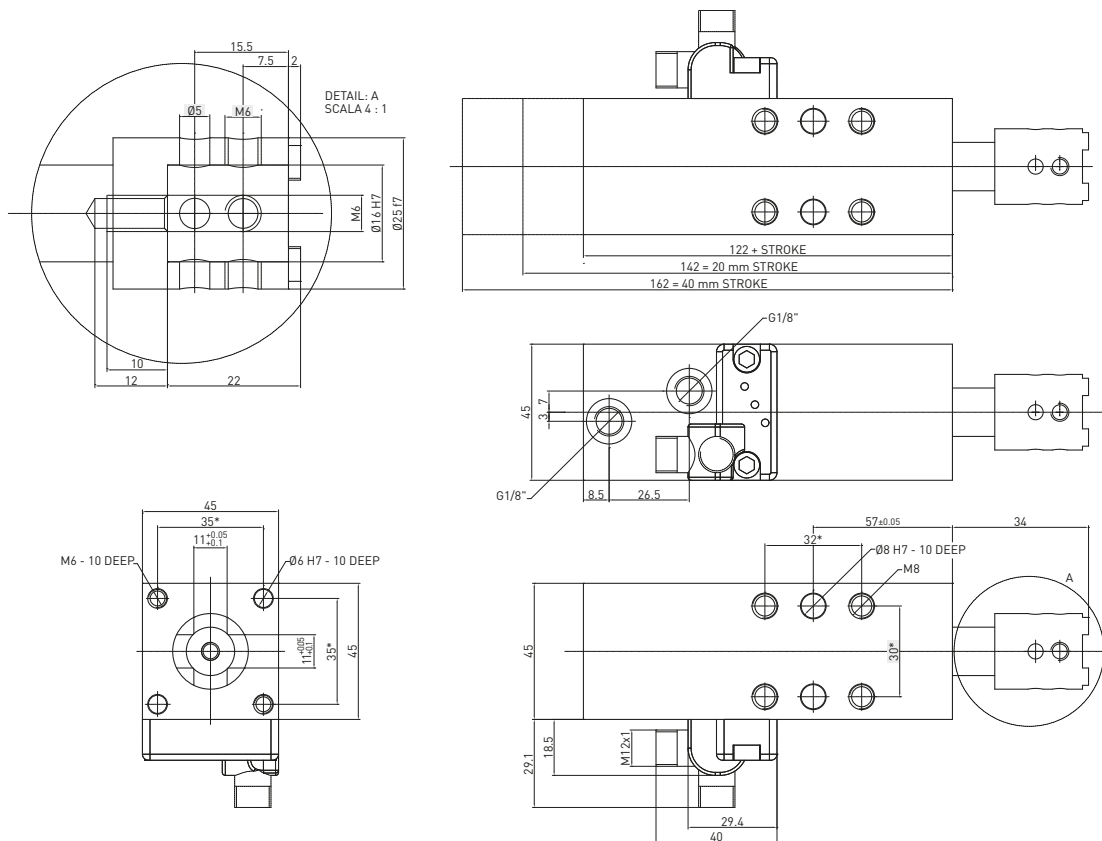


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 02 - 12/01/2018

RA32E _2 / Retractable locating pin package - Size 32 mm - iØ 10 mm cross-cut key rod termination

WEIGHT 0.94 kg
min. stroke version





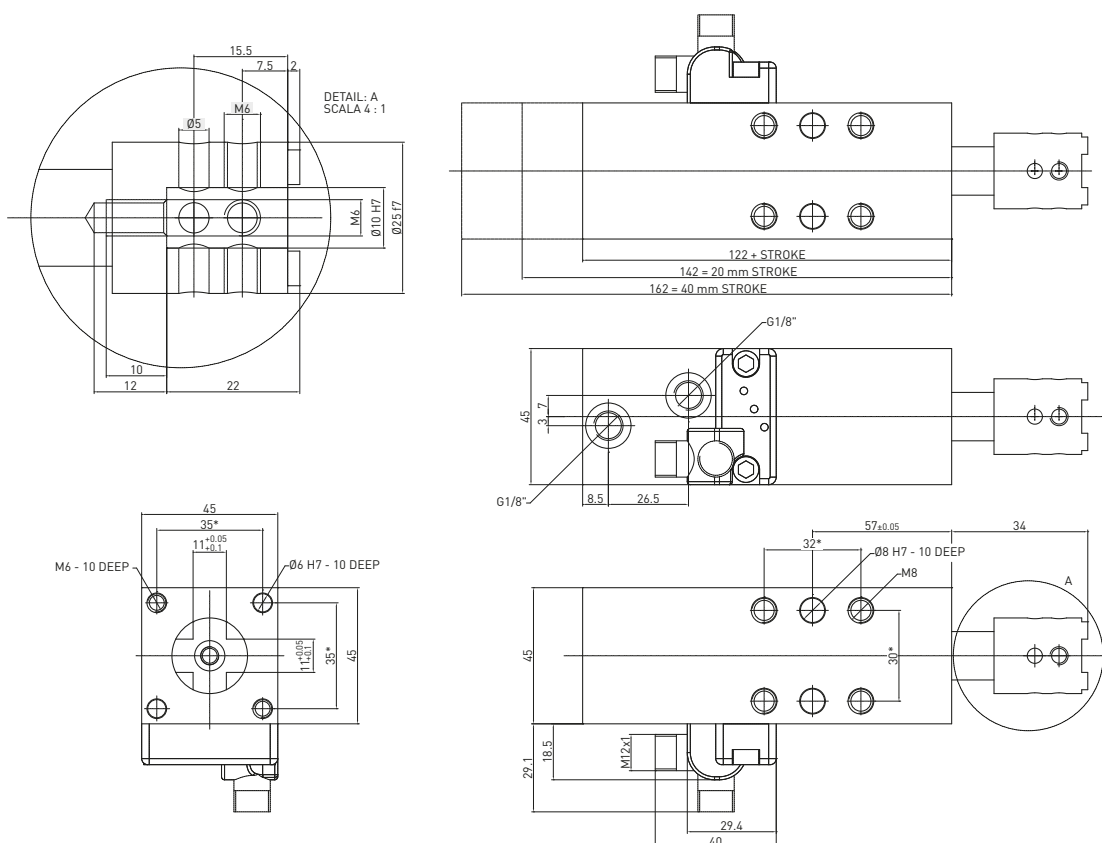


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 02 - 12/01/2018

RP50E _1 / Retractable locating pin package - Size 50 mm - iØ 16 mm cross-cut key rod termination

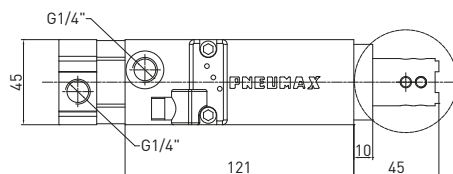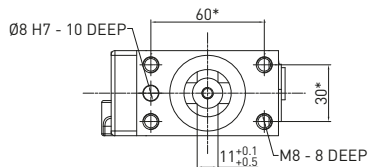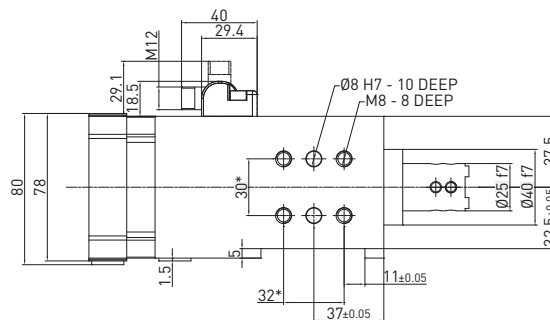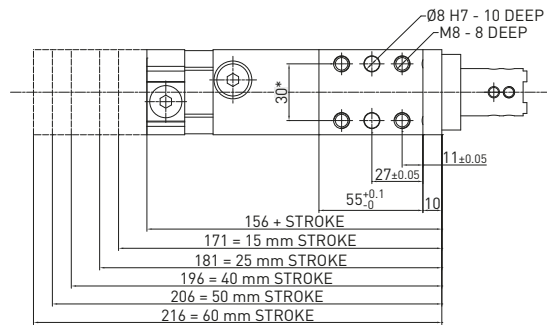

WEIGHT 1.85 kg
min. stroke version

WEIGHT 2.1 kg
max. stroke version






* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 26/02/2016

LOCATING

RP50E _2 / Retractable locating pin package - Size 50 mm - iØ 10 mm cross-cut key rod termination

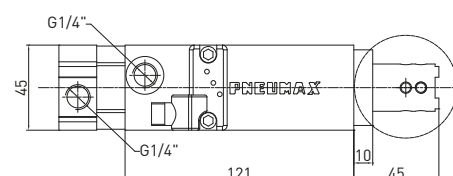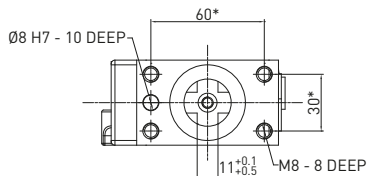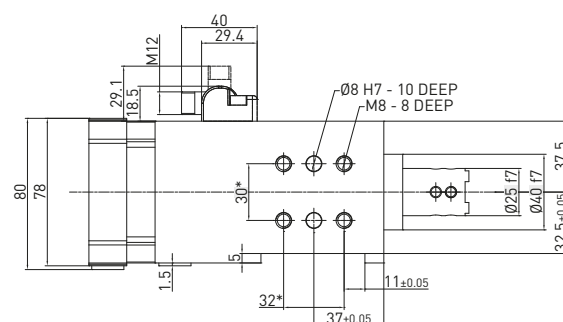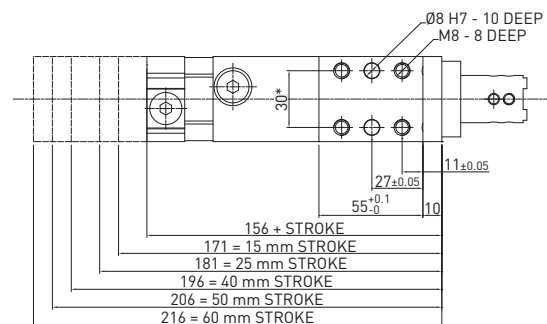

WEIGHT 1.85 kg
min. stroke version

WEIGHT 2.1 kg
max. stroke version


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 26/02/2016

RP50E_3 / Retractable locating pin package - Size 50 mm - Rod termination for offset pins

LOCATING

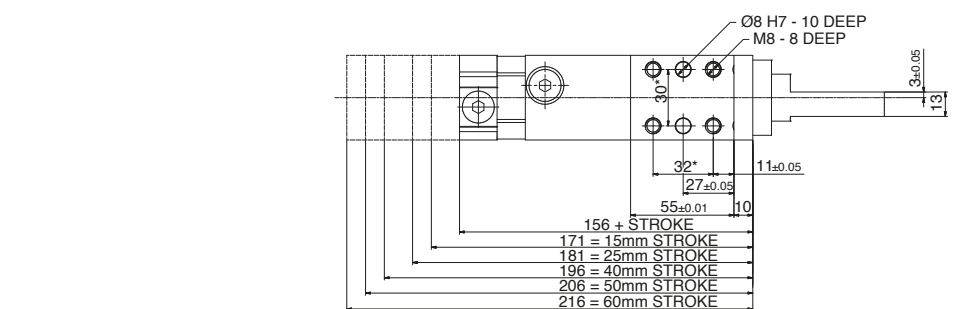


WEIGHT 1.85 kg

min. stroke version

WEIGHT 2.1 kg

max. stroke version


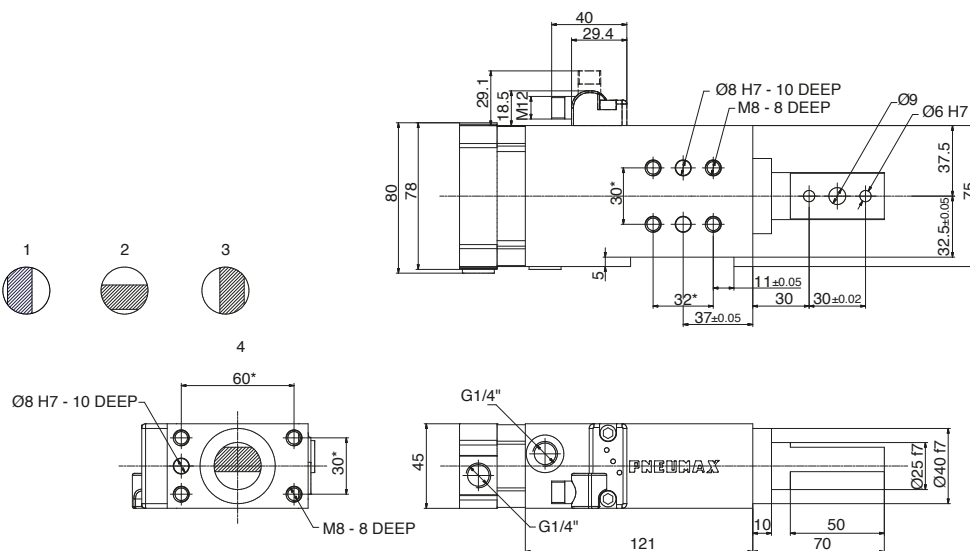


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 29/05/2024

RP50E_4 / Retractable locating pin package - Size 50 mm - Rod termination with key

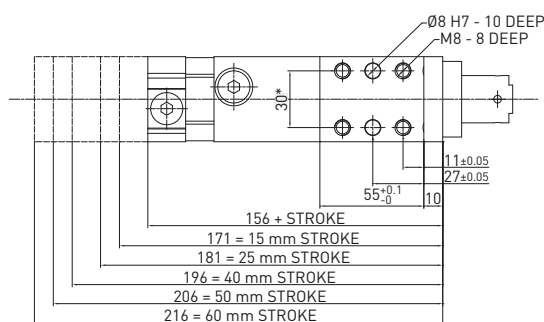


WEIGHT 1.85 kg

min. stroke version

WEIGHT 2.1 kg

max. stroke version





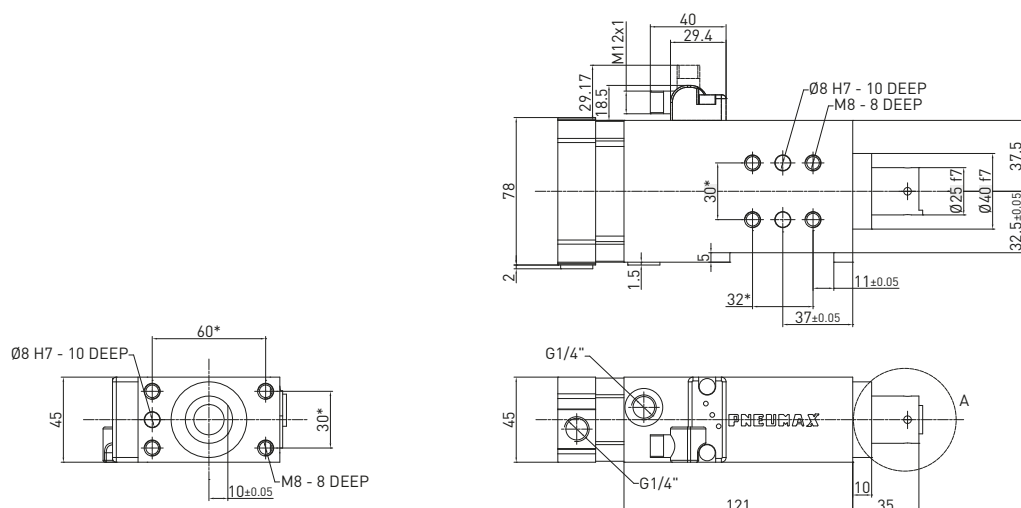


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 02 - 31/03/2015

RP50E_5 / Retractable locating pin package - Size 50 mm - iØ 10 mm flat termination

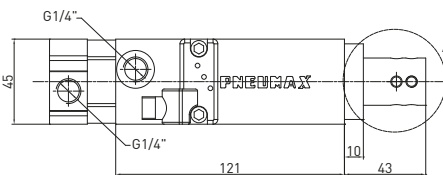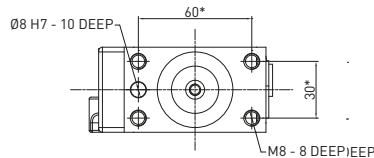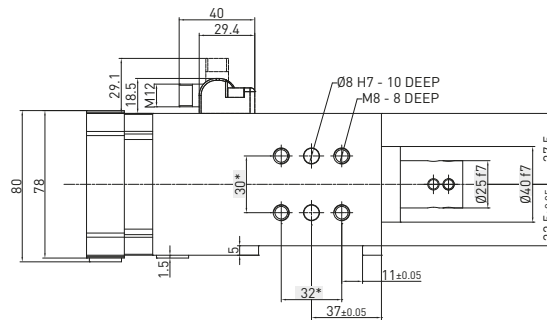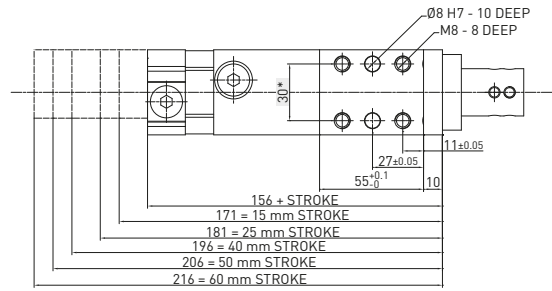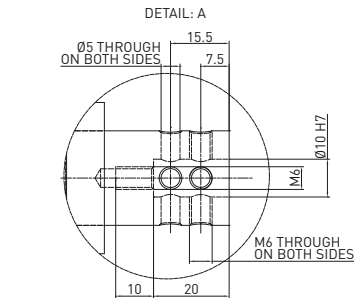

WEIGHT 1.85 kg
min. stroke version

WEIGHT 2.1 kg
max. stroke version






* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 14/03/2016

LOCATING

RP50E_6 / Retractable locating pin package - Size 50 mm - iØ 12 mm flat termination

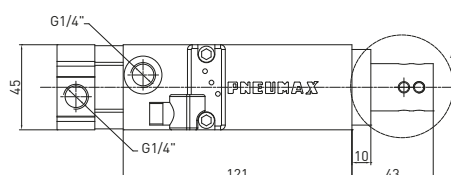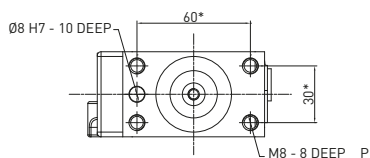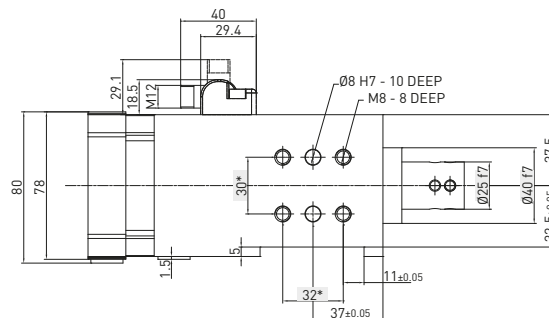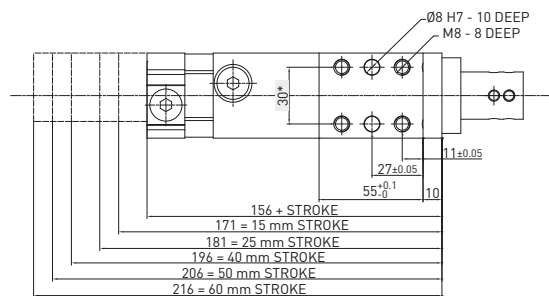

WEIGHT 1.85 kg
min. stroke version

WEIGHT 2.1 kg
max. stroke version



* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02




DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 26/02/2016

RP50E_7 / Retractable locating pin package - Size 50 mm - iØ 12 mm CNOMO termination

DETAIL: A

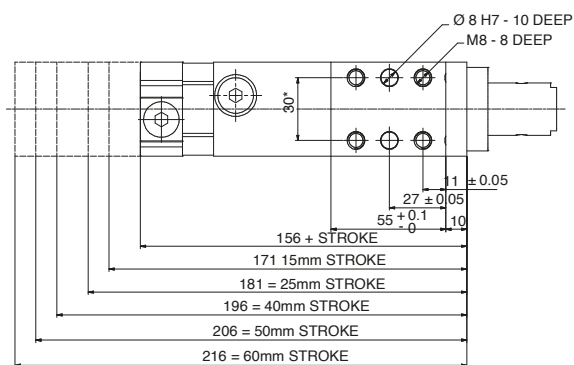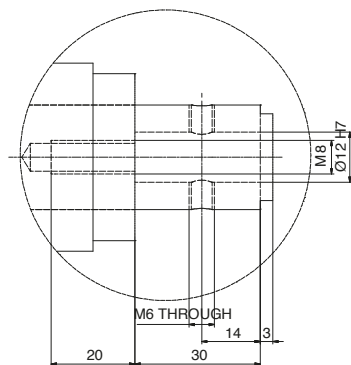
WEIGHT 1.85 kg
min. stroke version

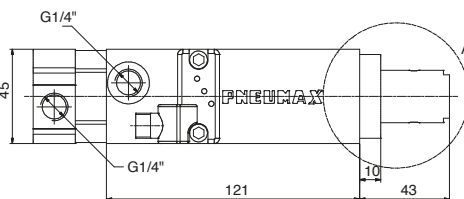
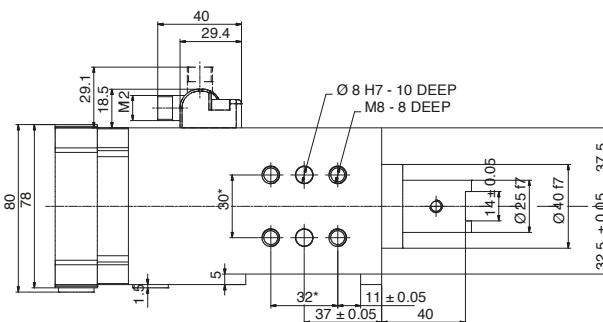
WEIGHT 2.1 kg
max. stroke version

 * DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02


 DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 26/09/2017

RP50E_8 / Retractable locating pin package - Size 50 mm - iØ 20 mm CNOMO termination

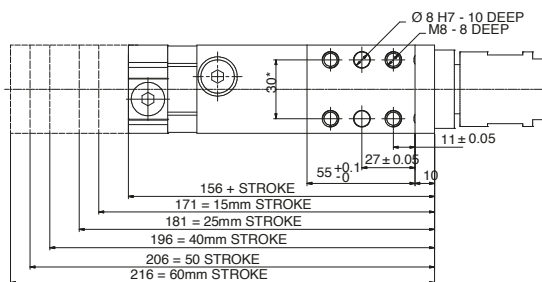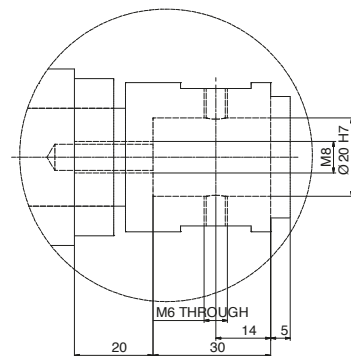
DETAIL: A


WEIGHT 1.85 kg
min. stroke version


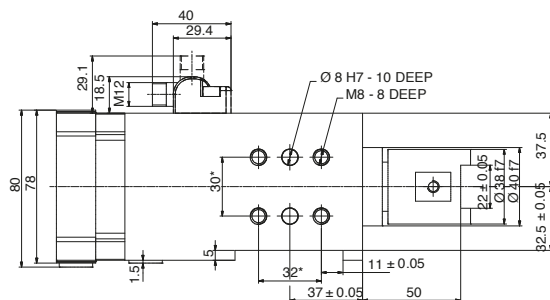
WEIGHT 2.1 kg
max. stroke version


ROD ORIENTATION

TERMINATION 2




TERMINATION 1

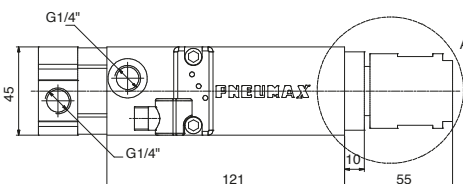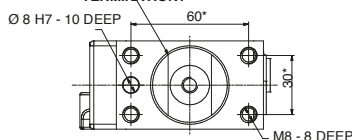
 * DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

 DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 26/09/2017

RD250E _1 / Retractable locating pin package - Size 50 mm - iØ 16 mm cross-cut key rod termination with manual operation

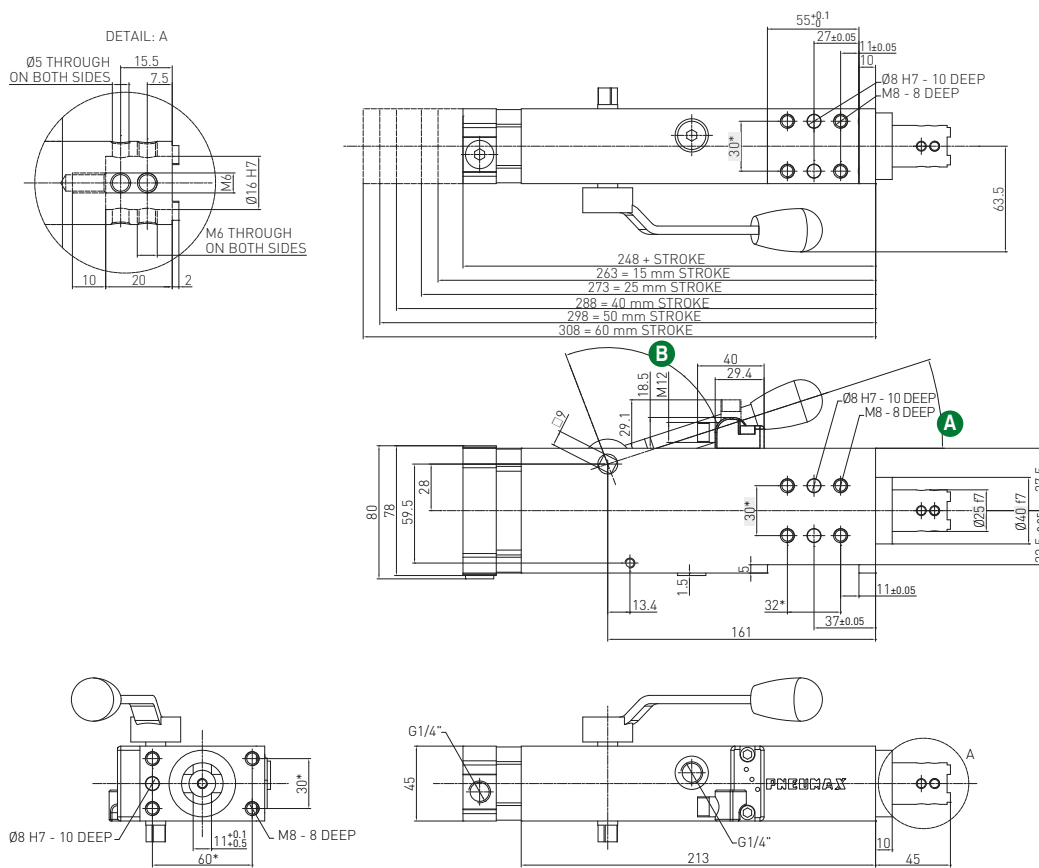

WEIGHT 1.85 kg
min. stroke version

WEIGHT 3.1 kg
max. stroke version

Handle swivel angle

Stroke	A Handle swivel angle	B Handle swivel angle
15	90°	18°
25	70°	38°
40	42°	76°
50	25°	83°
60	15°	93°

Max Hand Force: 200 N


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ±0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ±0.1

REV. 00 - 05/03/2018

LOCATING

RD250E _2 / Retractable locating pin package - Size 50 mm - iØ 10 mm cross-cut key rod termination with manual operation

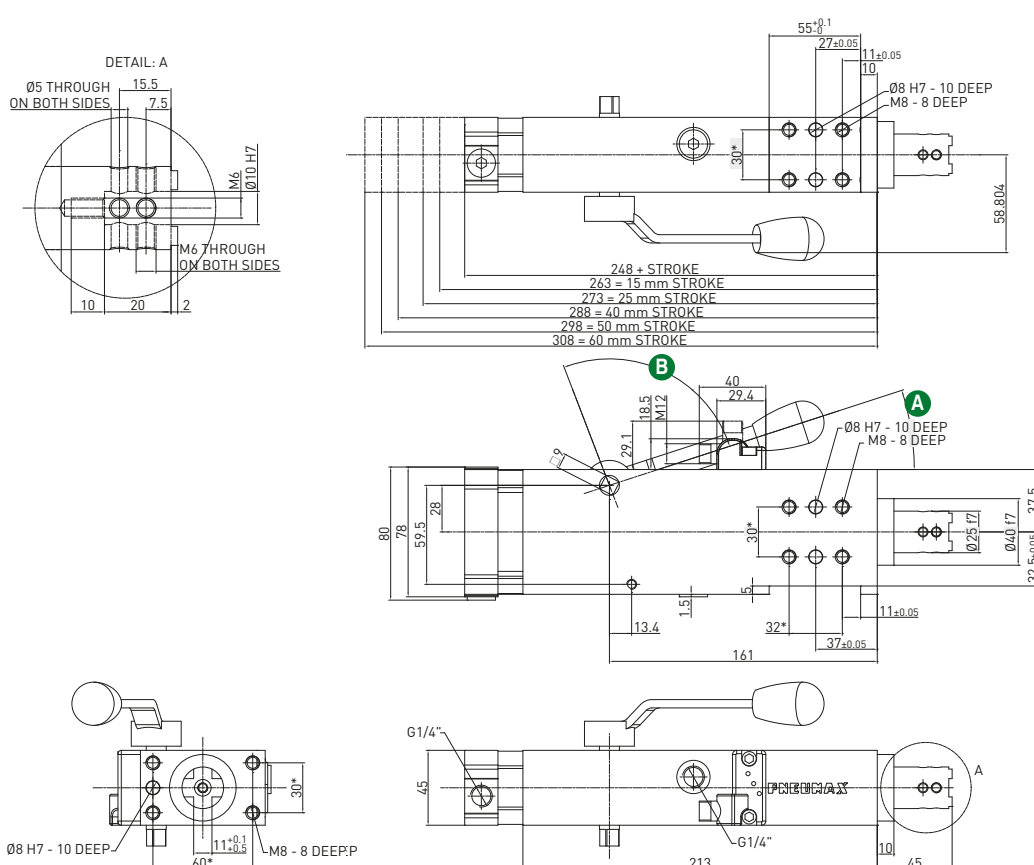

WEIGHT 1.85 kg
min. stroke version

WEIGHT 3.1 kg
max. stroke version

Handle swivel angle

Stroke	A Handle swivel angle	B Handle swivel angle
15	90°	18°
25	70°	38°
40	42°	76°
50	25°	83°
60	15°	93°

Max Hand Force: 200 N

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ±0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ±0.1


REV. 01 - 26/02/2016

RD250E_3 / Retractable locating pin package - Size 50 mm - Rod termination for offset pins with manual operation

WEIGHT 1.85 kg
min. stroke version

WEIGHT 3.1 kg
max. stroke version

LOCATING

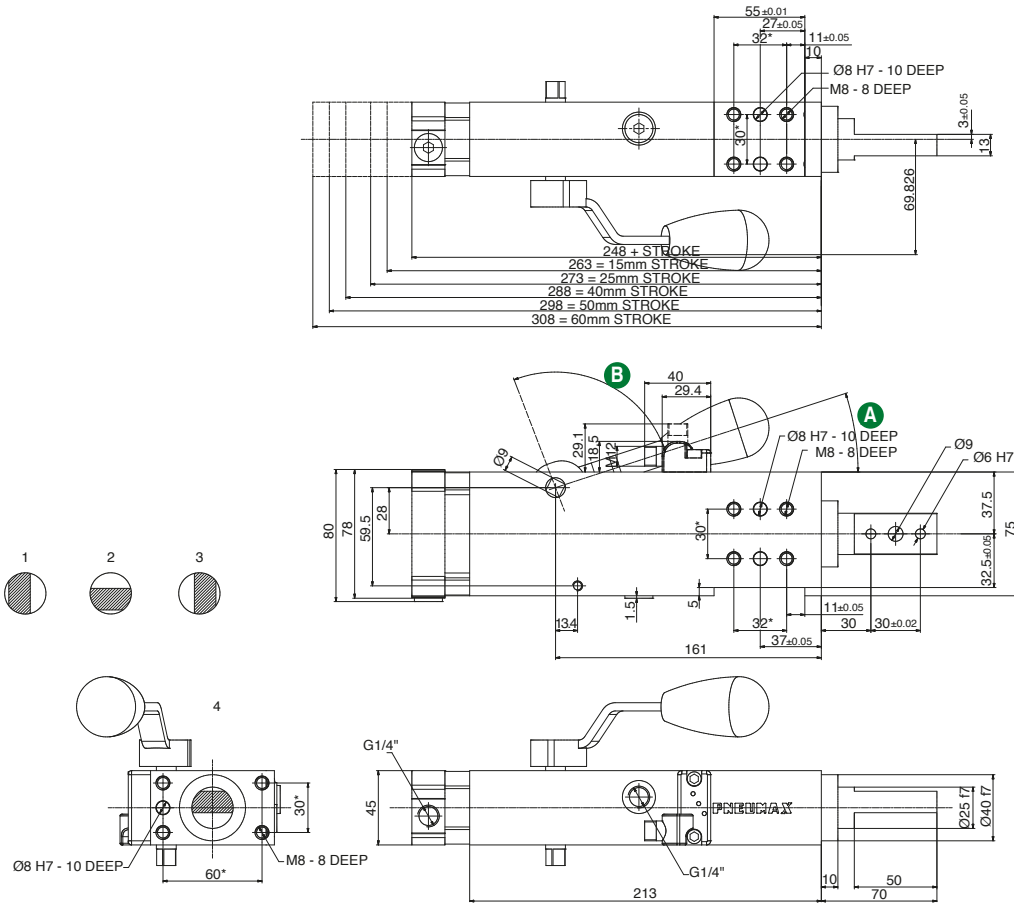

Handle swivel angle

Stroke	A Handle swivel angle	B Handle swivel angle
15	90°	18°
25	70°	38°
40	42°	76°
50	25°	83°
60	15°	93°

Max Hand Force: 200 N

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02


DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 04 - 29/05/2024

RD250E _4 / Retractable locating pin package - Size 50 mm - Rod termination with key with manual operation

WEIGHT 2.85 kg
min. stroke version

WEIGHT 3.1 kg
max. stroke version

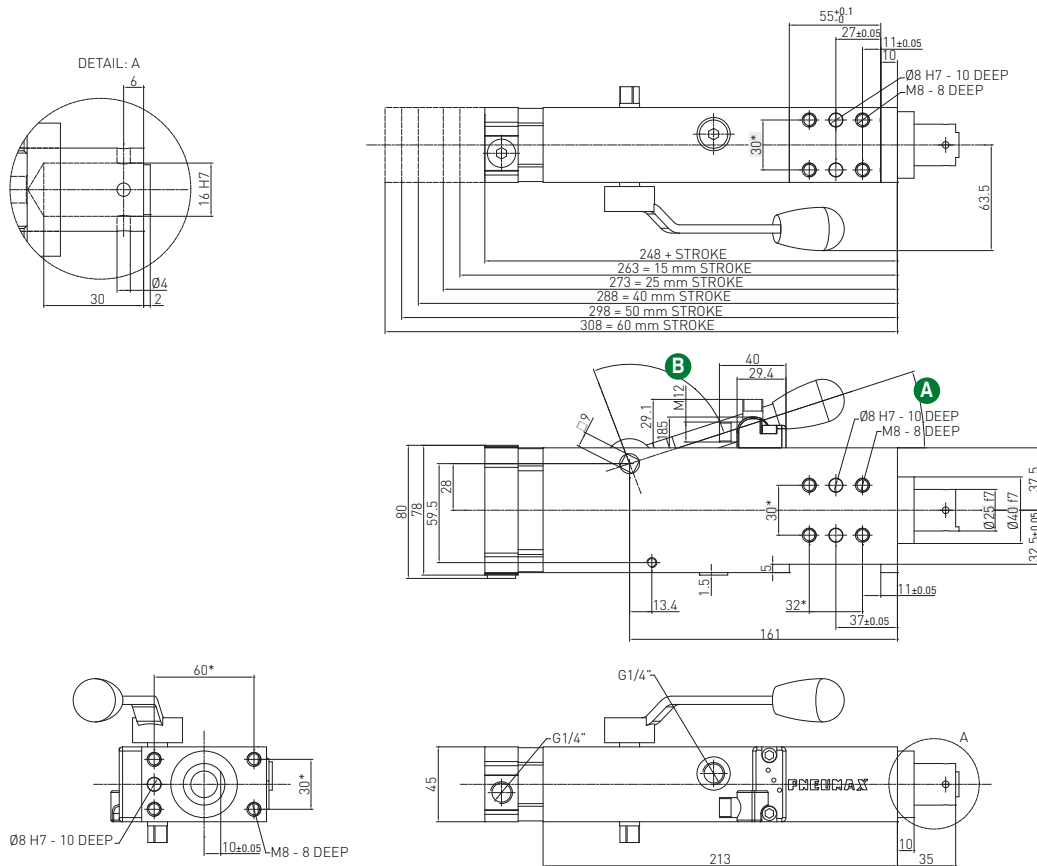

Handle swivel angle

Stroke	A Handle swivel angle	B Handle swivel angle
15	90°	18°
25	70°	38°
40	42°	76°
50	25°	83°
60	15°	93°

Max Hand Force: 200 N






* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ±0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ±0.1

REV. 04 - 05/03/2018

RM250 _1 / Manual retractable locating pin package - Size 50 mm - iØ 16 mm cross-cut key rod termination

WEIGHT 3.2 kg

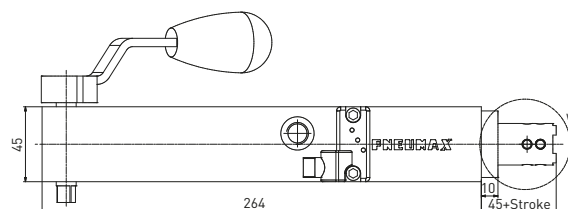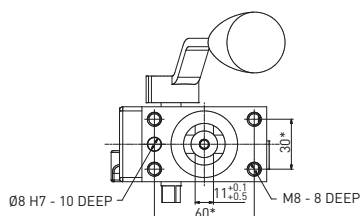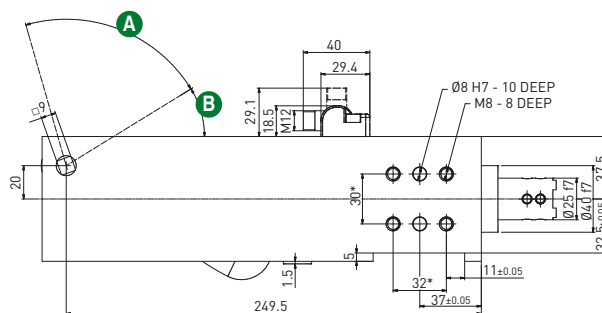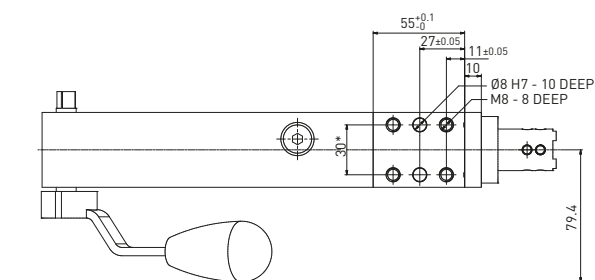

Max Hand Force: 200 N






* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 27/01/2022

RM250 _2 / Manual retractable locating pin package - Size 50 mm - iØ 16 mm cross-cut key rod termination

WEIGHT 3.2 kg

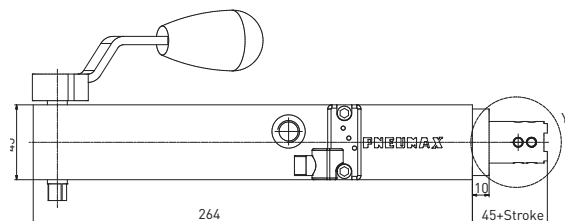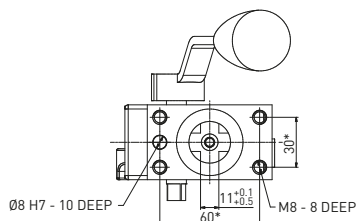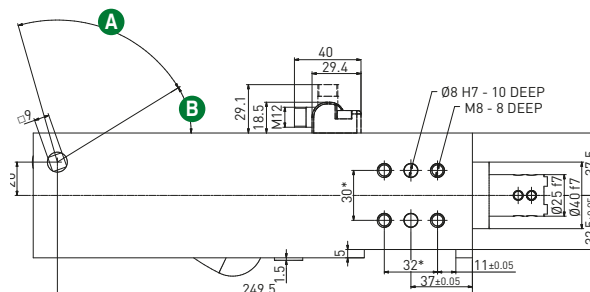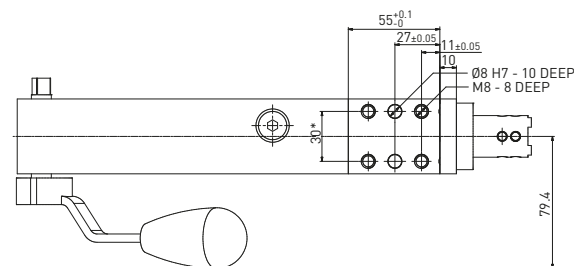

Max Hand Force: 200 N


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 27/01/2022

RM250 _3 / Manual retractable locating pin package - Size 50 mm - iØ 16 mm cross-cut key rod termination

WEIGHT 3.2 kg

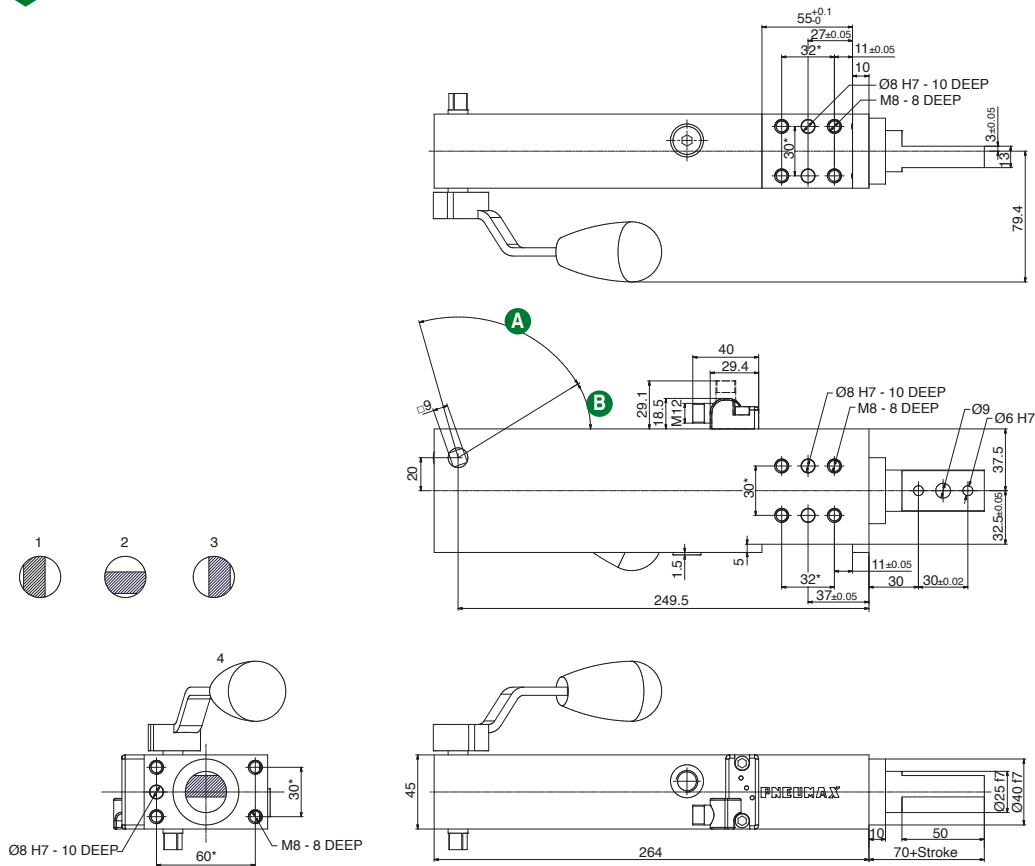

Max Hand Force: 200 N

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02


DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 29/05/2024

LOCATING

RM250 _4 / Manual retractable locating pin package - Size 50 mm - iØ 16 mm cross-cut key rod termination

WEIGHT 3.2 kg

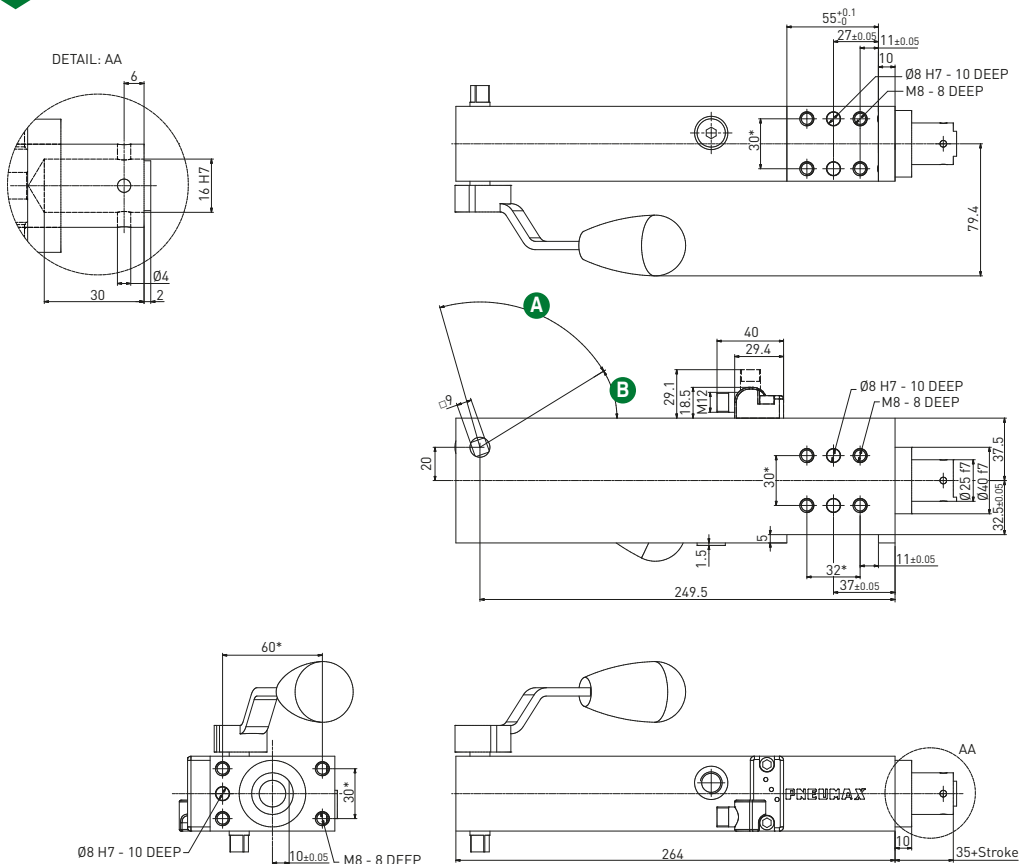

Max Hand Force: 200 N

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02






DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 27/01/2022

RP63E_1 / Retractable locating pin package - Size 63 mm - iØ 16 mm cross-cut key rod termination

WEIGHT 2.45 kg
min. stroke version

WEIGHT 2.75 kg
max. stroke version

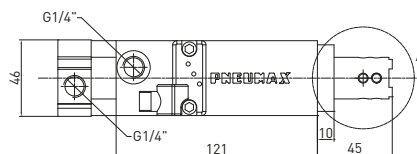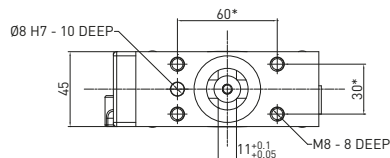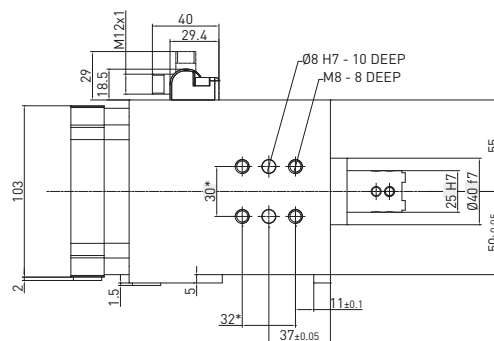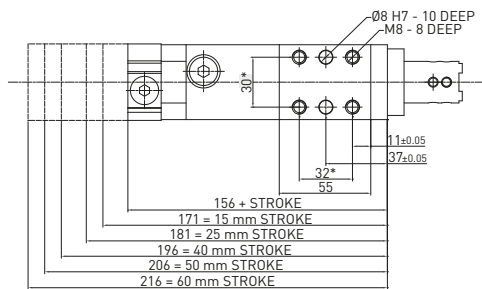

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02






DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 29/02/2016

RP63E_2 / Retractable locating pin package - Size 63 mm - iØ 10 mm cross-cut key rod termination

WEIGHT 2.45 kg
min. stroke version

WEIGHT 2.75 kg
max. stroke version

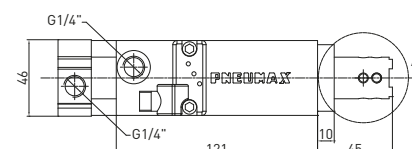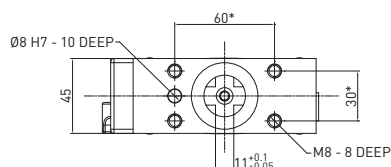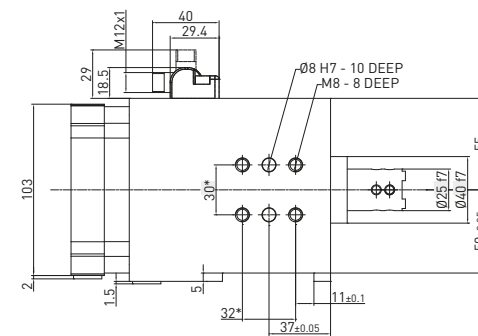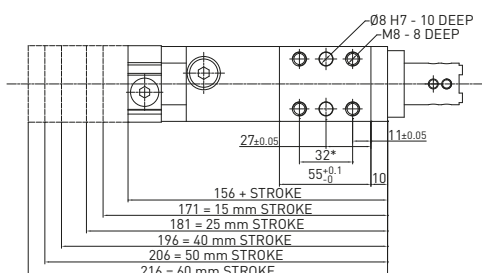

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02





DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 29/02/2016

RP63E _3 / Retractable locating pin package - Size 63 mm - Rod termination for offset pins

WEIGHT 2.45 kg
min. stroke version

WEIGHT 2.75 kg
max. stroke version

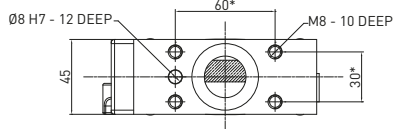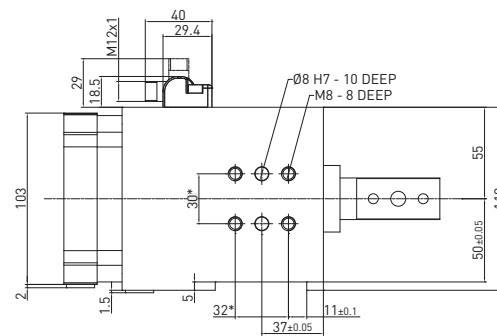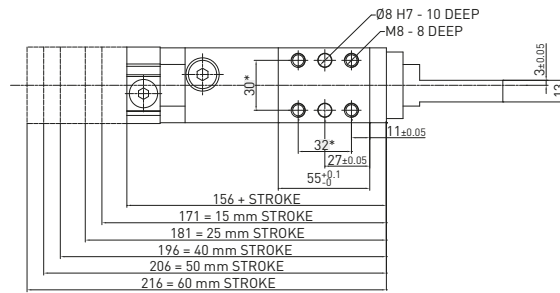

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1





REV. 00 - 31/03/2015

LOCATING

RP63E _4 / Retractable locating pin package - Size 63 mm - Rod termination with key

WEIGHT 2.45 kg
min. stroke version

WEIGHT 2.75 kg
max. stroke version

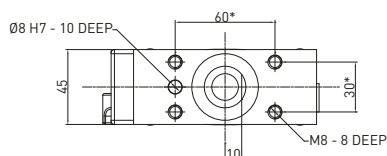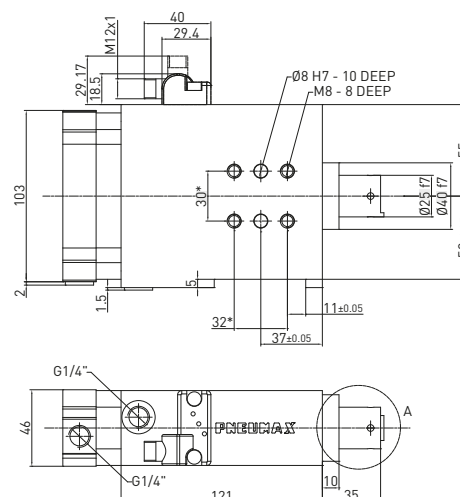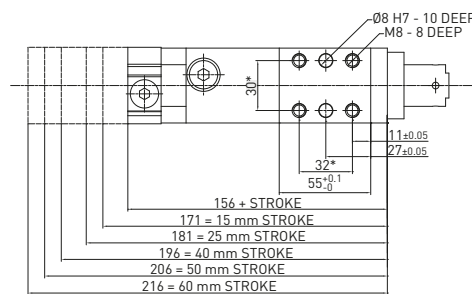

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 31/03/2015






RP63E _5 / Retractable locating pin package - Size 63 mm - iØ 10 mm flat termination

WEIGHT 2.45 kg

min. stroke version

WEIGHT 2.75 kg

max. stroke version

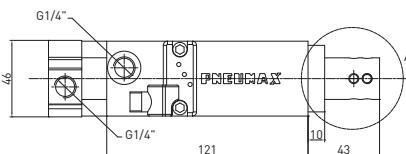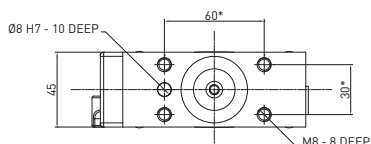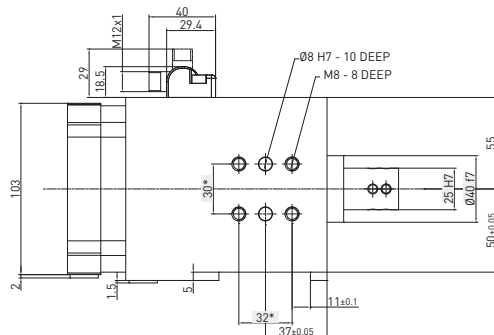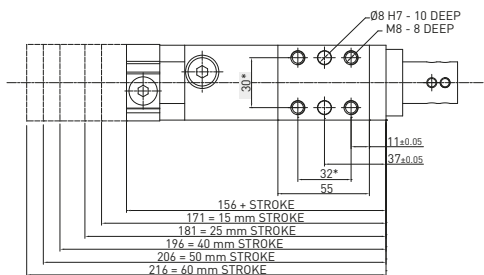

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ±0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ±0.1

REV. 00 -15/03/2016






RP63E _6 / Retractable locating pin package - Size 63 mm - iØ 12 mm flat termination

WEIGHT 2.45 kg

min. stroke version

WEIGHT 2.75 kg

max. stroke version

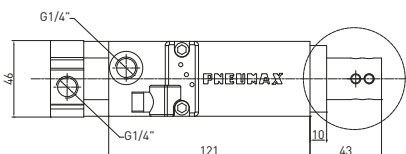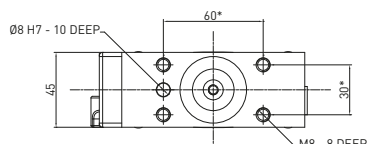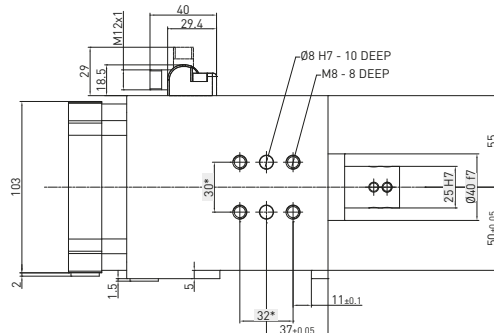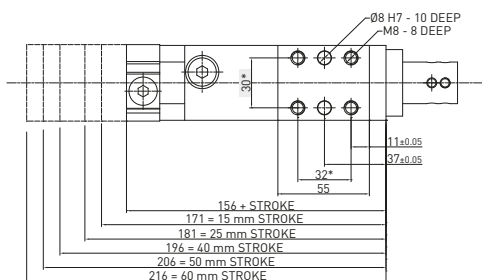


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ±0.02

DIMENSIONAL
TOLERANCE FOR THREADED
HOLES: ±0.1

REV. 00 -15/03/2016

RP63E_7 / Retractable locating pin package - Size 63 mm - iØ 12 mm flat termination

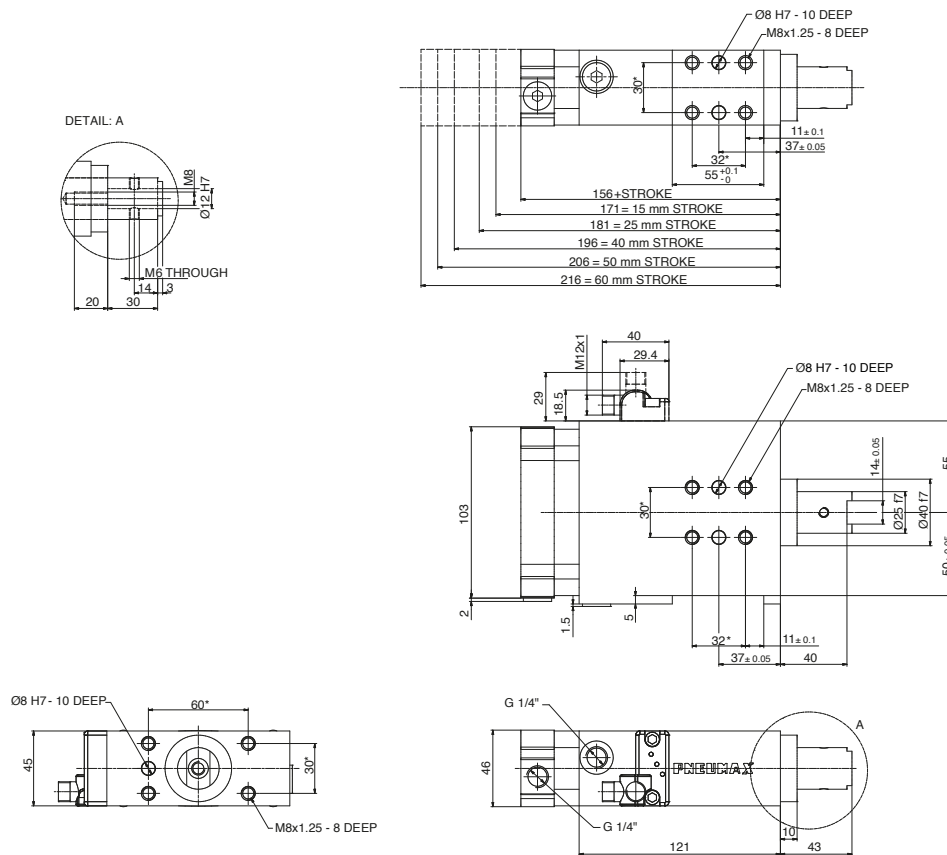

WEIGHT 2.45 kg
min. stroke version

WEIGHT 2.75 kg
max. stroke version


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 -15/03/2016

LOCATING

RP63E_8 / Retractable locating pin package - Size 63 mm - iØ 12 mm flat termination

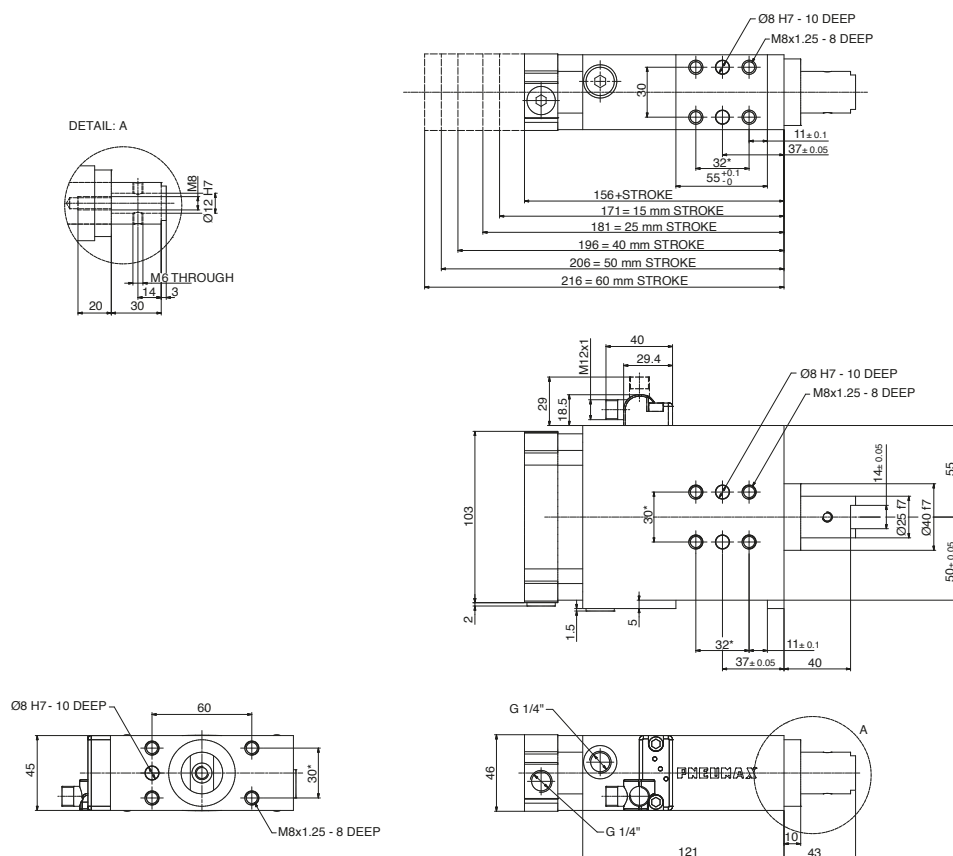

WEIGHT 2.45 kg
min. stroke version

WEIGHT 2.75 kg
max. stroke version

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED
HOLES: ± 0.1

REV. 00 -15/03/2016

RT-Series



Retractable locating pin packages with toggle linkage

- Fully encapsulated toggle mechanism: in case of air loss, the working position remains secure
- Manual unlock mechanism to disengage the linkage in emergency situations
- Position repeatability ± 0.05 mm
- Clear design with user-friendly surfaces and no dirt or welding deposit traps

Technical features

Pneumatic ports on both sides of the cylinder.

Operating features

Operating pressure from 2 to 8 bar / from 30 to 115 psi

Lubrication all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 40 mm

• Max deflection (at 100 mm)

40 mm	0.5	0.004	0.009	0.004
	1	0.009	0.02	0.009
	1.5	0.013	0.032	0.013
	2	0.018	0.047	0.018
	2.5	0.022	0.066	0.022
	3	0.026	0.075	0.026

• Functional data (at 5 bar / 72.5 psi)

Thrust force at end stroke	2700 N
----------------------------	--------


• Cycle time for max stroke

< 0.8 s NO flow valve required

• Air consumption


Air consumption for complete cycle

REV. 00 - 18/06/2015

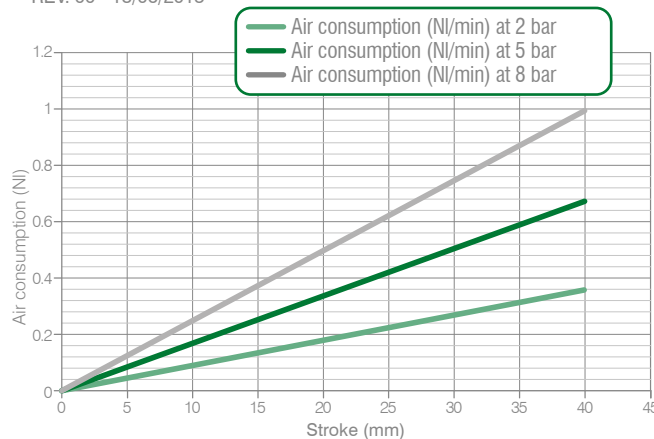


Load position A

Horizontal mounting position of the retractable locating pin/load centre on the rod




Load position B

Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Load position C

Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis




RT-Series / Ordering string

RT_40-Series

R T 40 E 40 G 3 1


R	VERSION	R = retractable locating pin package with toggle lock
T	OPERATION	T = pneumatic with toggle lock TD = pneumatic with manual operation and toggle lock
40	SIZE	40 = Ø 40 mm
E	SENSOR	E = electronic sensor with M12 swivel connector -PNP
40	STROKE	40 = 40 mm
G	PORTS	G = G thread – BSPP
3	ROD TERMINATION	1 = iØ 16 mm cross-cut key rod termination 3 = rod termination for offset pins
1	ROD ORIENTATION (for termination type 3)	1 =  2 =  3 =  4 = 

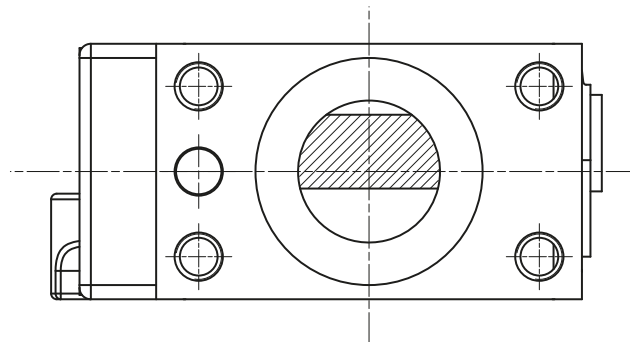

RT40E40G1 / Retractable locating pin package with toggle lock - Size 40 mm - iØ 16 mm cross-cut key rod termination

WEIGHT 3,33 kg

DETAGLIO: B
SCALA 1:1

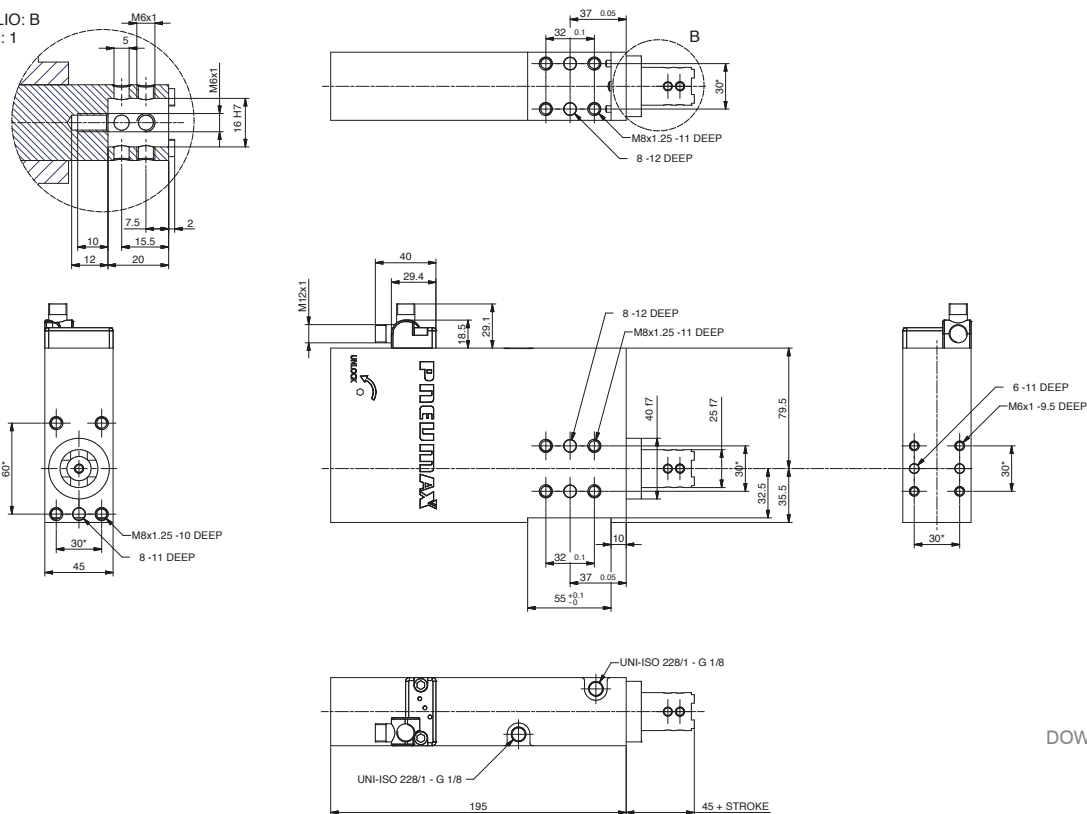


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 23/07/2021

RT40E40G3_ / Retractable locating pin package with toggle lock and manual operation - Size 40 mm rod termination for offset pins

WEIGHT 3,9 kg

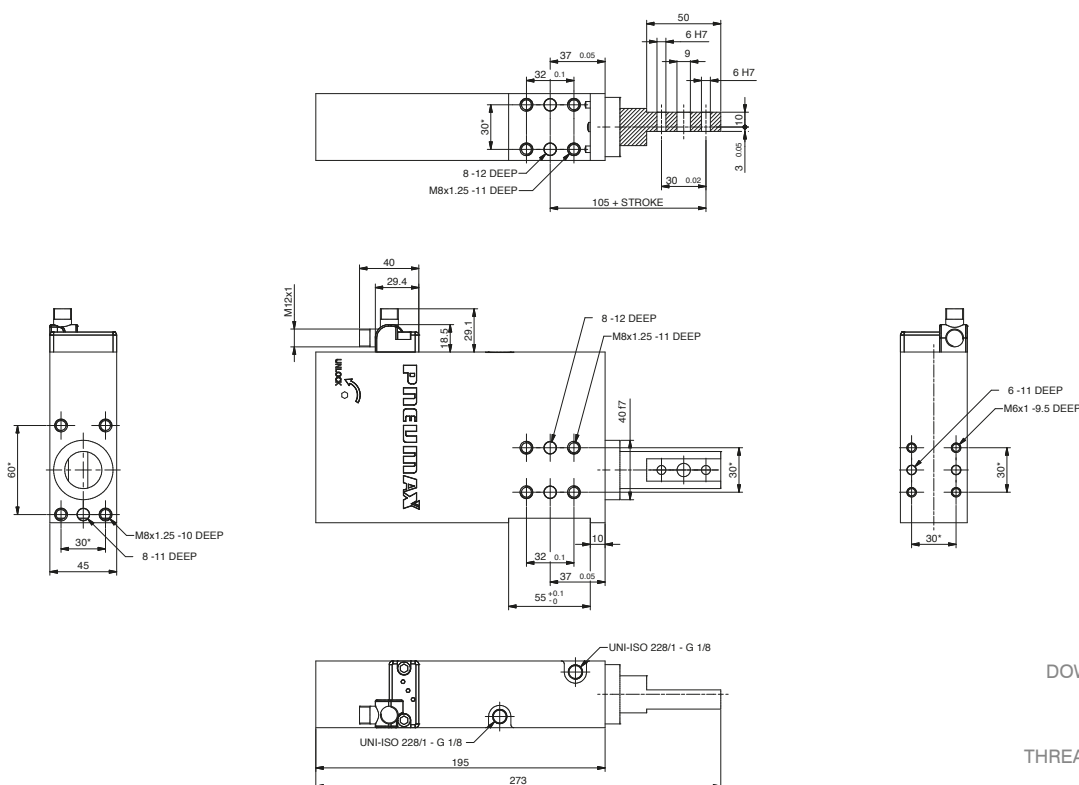

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1


REV. 01 - 30/06/2022

RTD40E40G1 / Retractable locating pin package with toggle lock and manual operation - Size 40 mm iØ 16 mm cross-cut key rod termination

WEIGHT 3,58 kg

Handle included

DETTAGLIO: A
SCALA 1 : 1

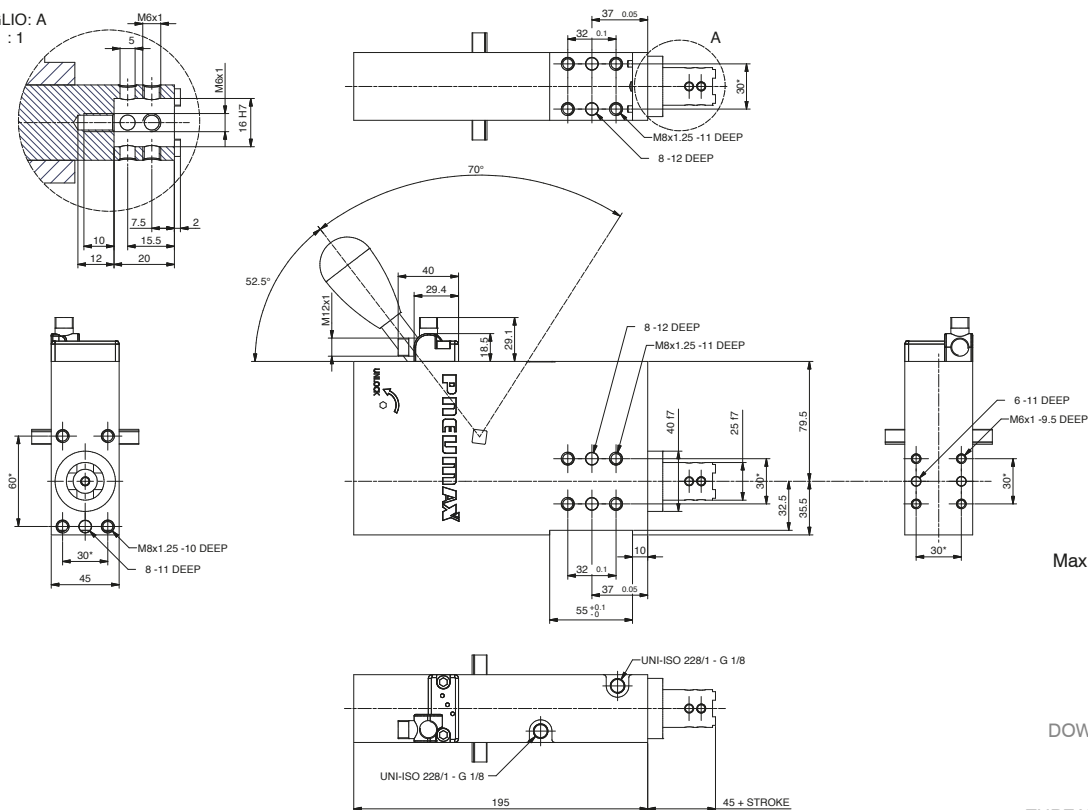

Max Hand Force: 200 N

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02


DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 23/07/2021

RTD40E40G3_ / Retractable locating pin package with toggle lock and manual operation - Size 40 mm rod termination for offset pins

WEIGHT 3,9 kg

Handle included

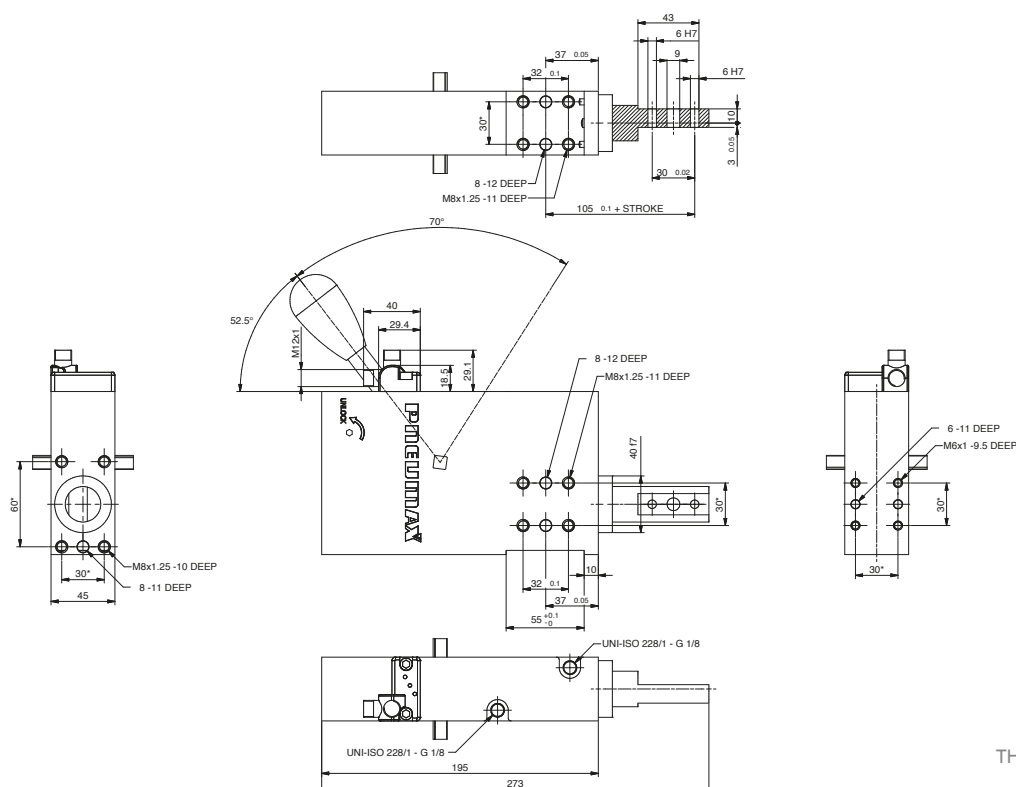

Max Hand Force: 200 N

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02


DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 30/06/2022

RTD40E40G7 / Retractable locating pin package with toggle lock and manual operation - Size 40 mm
iØ 12 mm cross-cut key rod termination

WEIGHT 3,72 kg

Handle included

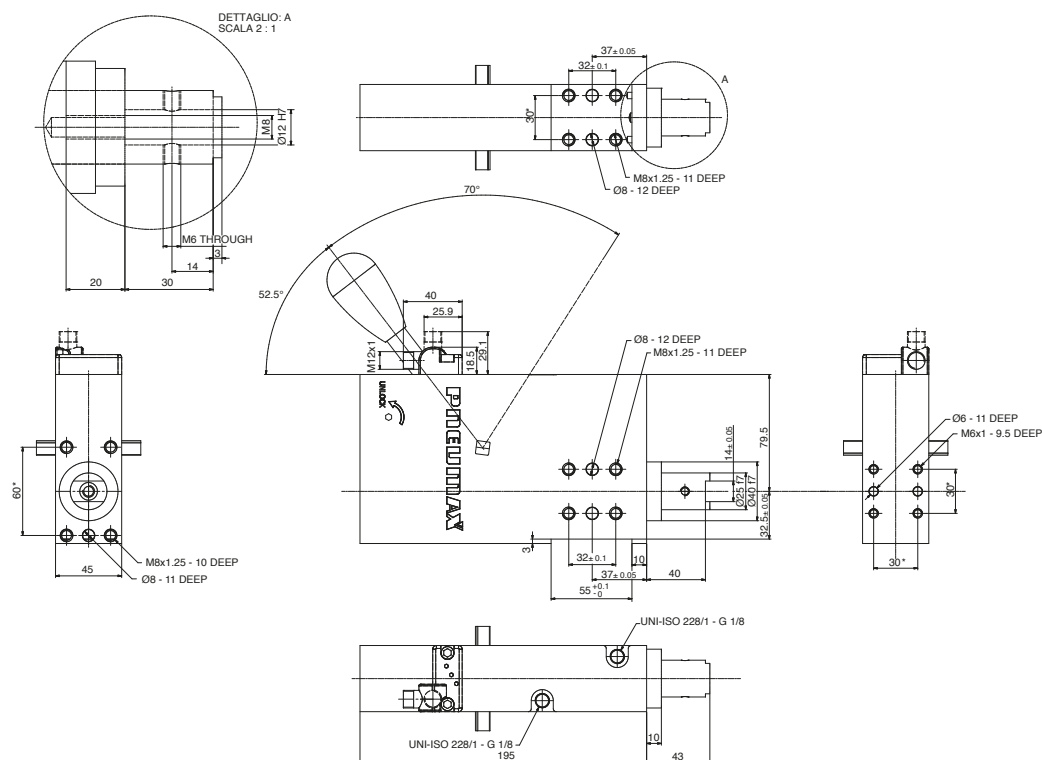

Max Hand Force: 200 N

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02


DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 29/02/2024

RTD40E40G8 / Retractable locating pin package with toggle lock and manual operation - Size 40 mm
iØ 20 mm cross-cut key rod termination

WEIGHT 3,9 kg

Handle included

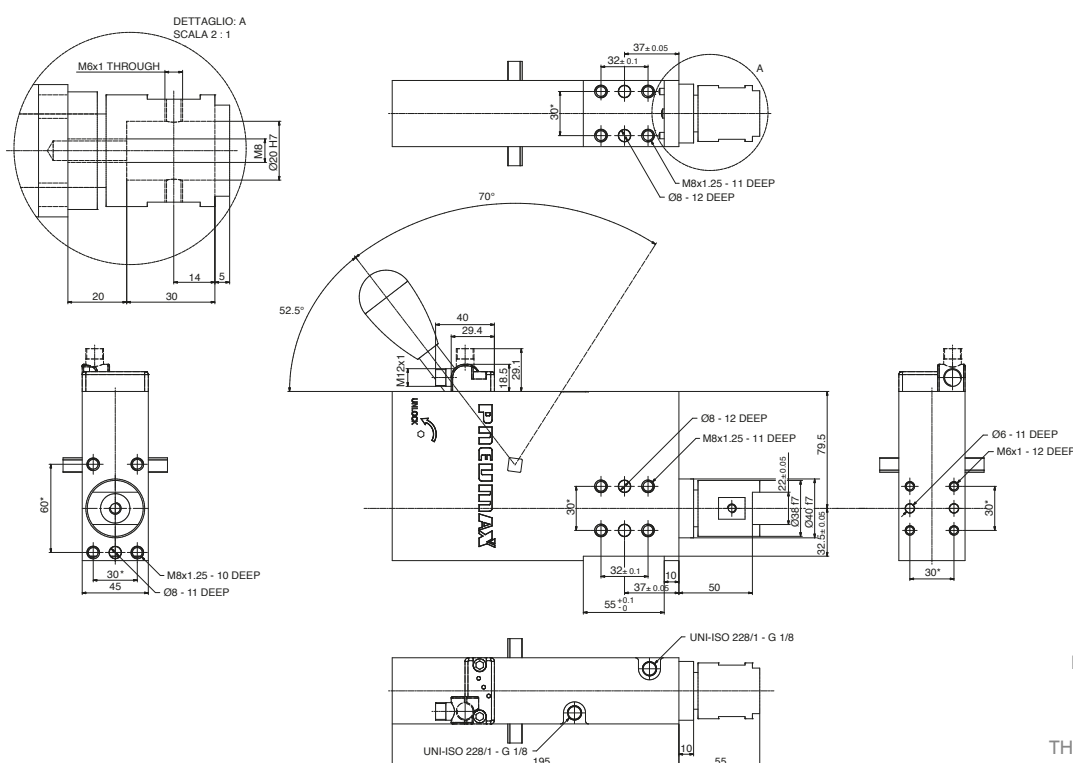

Max Hand Force: 200 N

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 00 - 29/02/2024

RC-Series

CNOMO



Retractable locating pin packages with CNOMO mounting pattern

Technical features

Pneumatic ports on both sides of the cylinder.

Operating features

Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Ø 50 mm

• Max deflection


Stroke	Load (kg)	Load position A deviation (mm)	Load position B deviation (mm)	Load position C deviation (mm)	Load position D deviation (mm)
50 mm	0.5	0.006	0.009	0.007	0.03
	1	0.013	0.02	0.018	0.07
	1.5	0.021	0.032	0.028	0.1
	2	0.026	0.047	0.043	0.12
	2.5	0.032	0.66	0.057	-
	3	0.037	0.075	0.068	-
25 mm	0.5	0	0.005	0	0.01
	1	0.005	0.015	0.005	0.03
	1.5	0.007	0.032	0.007	0.06
	2	0.011	0.047	0.011	0.08
	2.5	0.012	0.66	0.012	-
	3	0.014	0.075	0.014	-

• Functional data (at 5 bar / 72.5 psi)

Thrust force	825 N
Pull force	980 N
Max bending moment	3 N m / 2.21 lb-ft
Max distance from the load centre to the rod	200 mm
Interchangeability of the mounting	± 0,05 mm
Interchangeability of the mounting to the rod termination	± 0,15 mm
Rod output repeatability	± 0,04 mm
Protection degree:	IP 56 for pin packages IP67 for sensor
Operating temperature	-0 °C + 50 °C
Storage temperature	-25 °C + 60 °C


Load position A

Horizontal mounting position of the retractable locating pin/load centre on the rod




Load position B

Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis




Load position C

Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Load position D

100 mm in z




• Cycle time for max stroke

< 0.8 s **NO flow valve required**

• Air consumption

Air consumption for complete cycle

REV. 00 - 18/06/2015

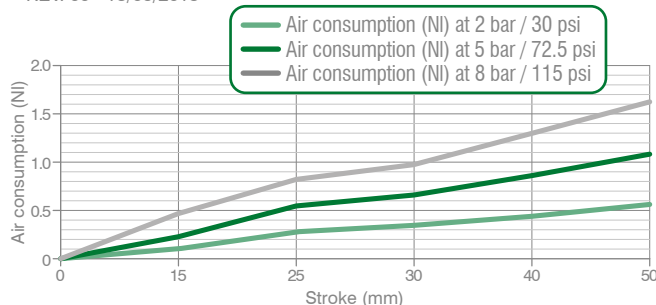

Size 63 mm

• Max deflection


Stroke	Load (kg)	Load position A deviation (mm)	Load position B deviation (mm)	Load position C deviation (mm)	Load position D deviation (mm)
50 mm	0.5	0.006	0.009	0.007	0.03
	1	0.013	0.02	0.018	0.07
	1.5	0.021	0.032	0.028	0.1
	2	0.026	0.047	0.043	0.12
	2.5	0.032	0.66	0.057	-
	3	0.037	0.075	0.068	-
25 mm	0.5	0	0.005	0	0.01
	1	0.005	0.015	0.005	0.03
	1.5	0.007	0.032	0.007	0.06
	2	0.011	0.047	0.011	0.08
	2.5	0.012	0.66	0.012	-
	3	0.014	0.075	0.014	-

• Functional data (at 5 bar / 72.5 psi)

Thrust force	825 N
Pull force	980 N
Max bending moment	3 N m / 2.21 lb-ft
Max distance from the load centre to the rod	200 mm
Interchangeability of the mounting	± 0,05 mm
Interchangeability of the mounting to the rod termination	± 0,15 mm
Rod output repeatability	± 0,04 mm
Protection degree:	IP 56 for pin packages IP67 for sensor
Operating temperature	-0 °C + 50 °C
Storage temperature	-25 °C + 60 °C


Load position **A**

Horizontal mounting position of the retractable locating pin/load centre on the rod




Load position **B**

Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis




Load position **C**

Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Load position **D**

100 mm in z




• Cycle time for max stroke

< 0.8 s NO flow valve required

• Air consumption

Air consumption for complete cycle

REV. 00 - 18/06/2015

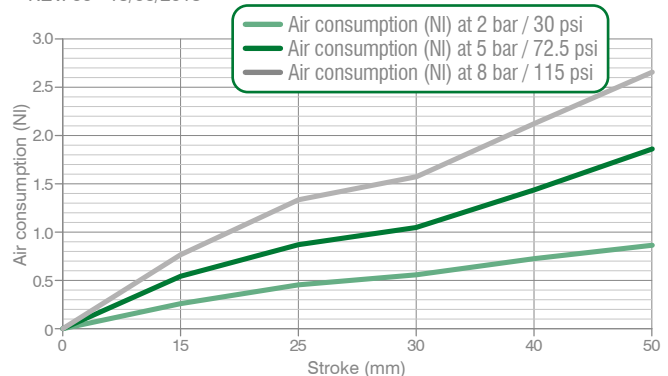

Please get in touch with our technical representatives for any application which exceeds the above values, to find the appropriate solution for your application.

Ordering string

RC-Series

RC **50** **C** **25** **1** **G**

RC

VERSION

RC = retractable locating pin package with CNOMO mounting pattern
RCD = retractable locating pin package with CNOMO mounting pattern and manual operation

50

SIZE

50 = Ø 50 mm
63 = Ø 63 mm

C

SENSOR

C = CNOMO sensor
N = no sensor

CNOMO

25

STROKE

25 = 25 mm
50 = 50 mm

1

ROD TERMINATION

1 = iØ 12 mm rod termination
2 = iØ 20 mm rod termination

G


PORTS

G = G thread – BSPP

RC50 1 / Retractable locating pin package with CNOMO mounting pattern - Size 50 mm - iØ 12 mm rod termination

WEIGHT 1.8 kg
min. stroke version

WEIGHT 1.9 kg
max. stroke version

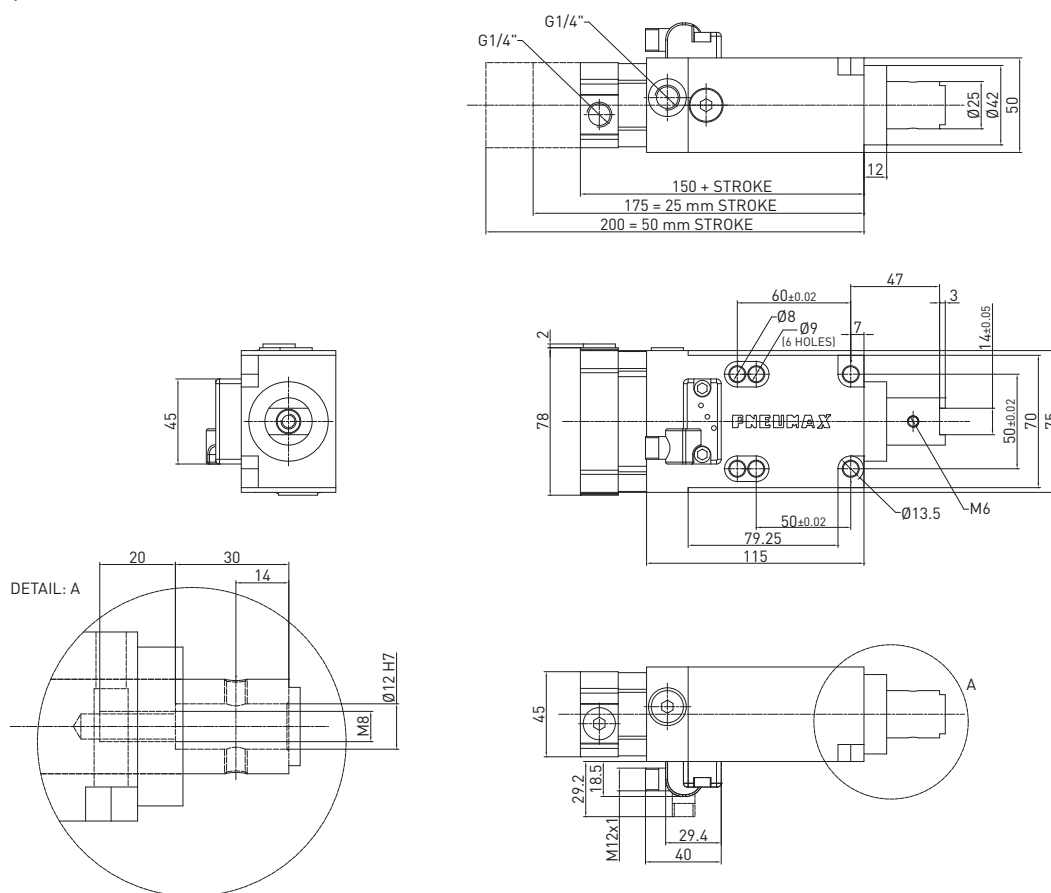


REV. 01 - 31/03/2015

RC50 2 / Retractable locating pin package with CNOMO mounting pattern - Size 50 mm - iØ 20 mm rod termination

WEIGHT 2 kg
min. stroke version

WEIGHT 2.1 kg
max. stroke version

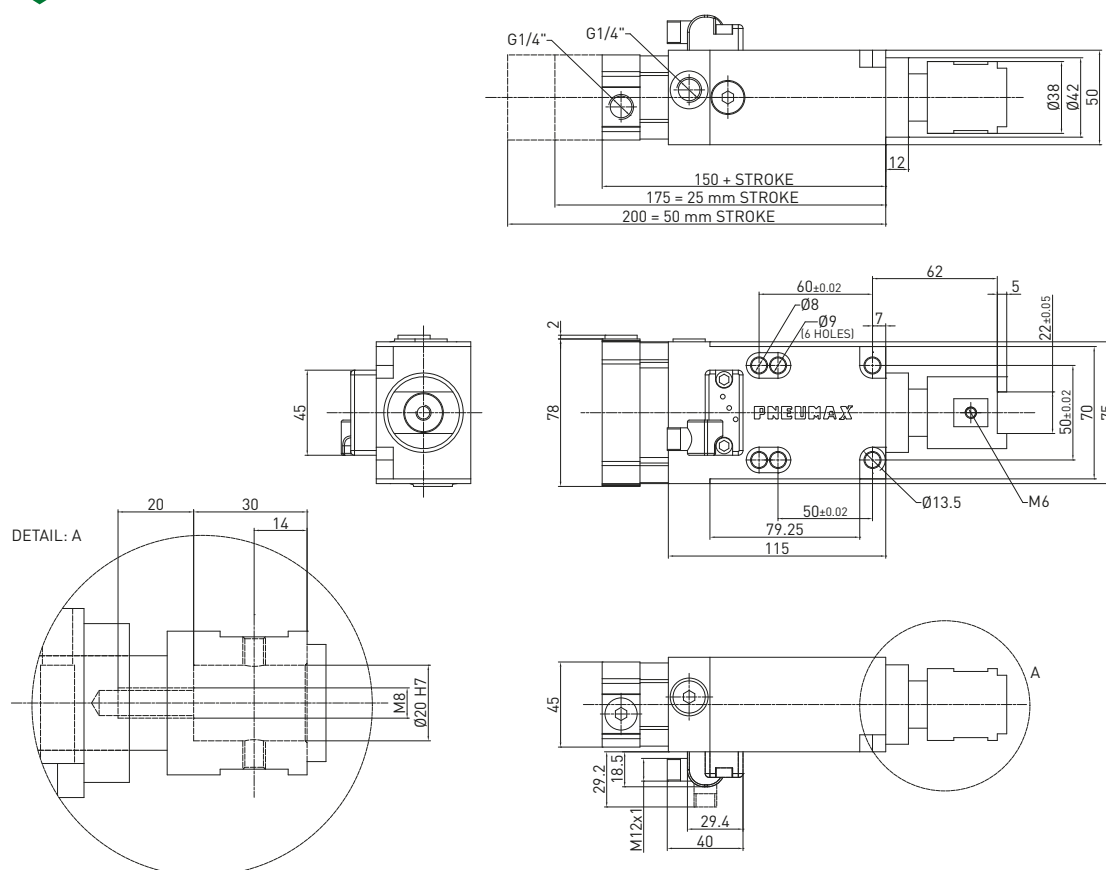


REV. 01 - 22/10/2015

RC63__1 / Retractable locating pin package with CNOMO mounting pattern - Size 63 mm - iØ 12 mm rod termination

WEIGHT 2 kg
min. stroke version

WEIGHT 2.1 kg
max. stroke version

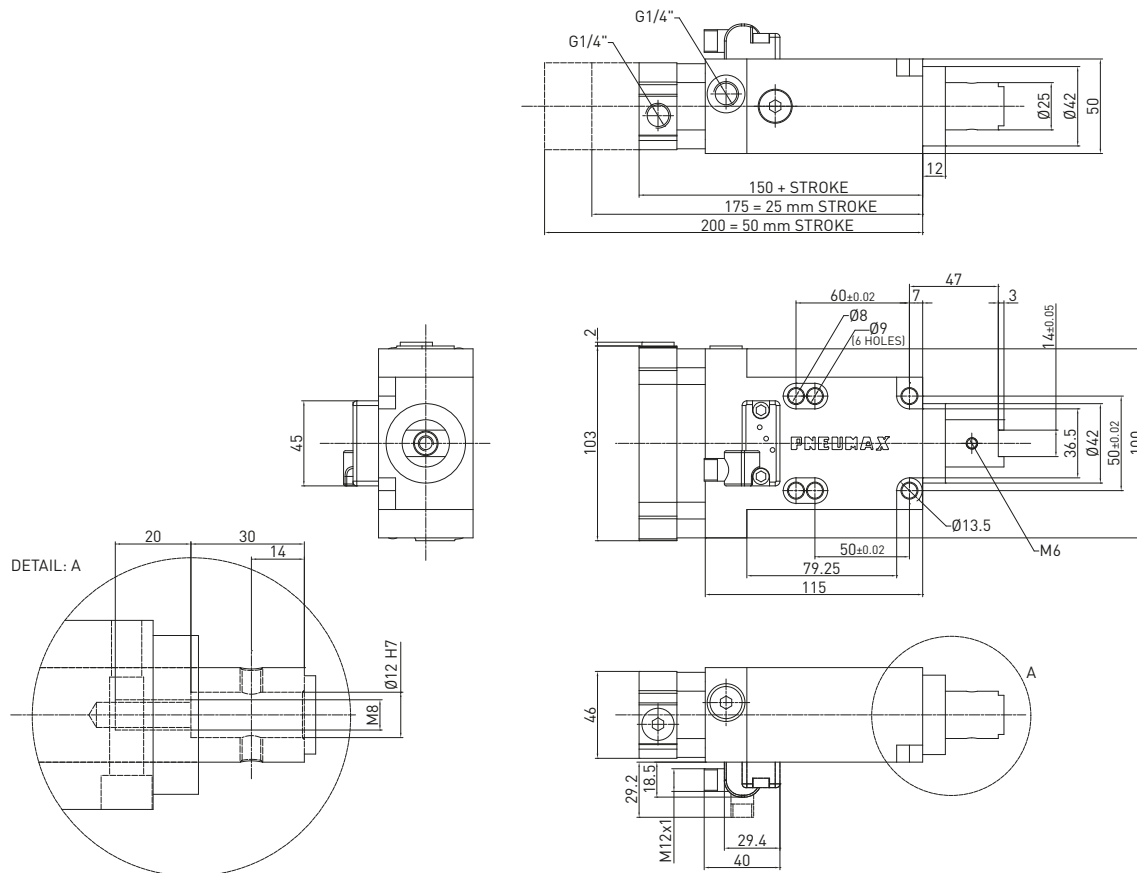


REV. 01 - 31/03/2015

RC63__2 / Retractable locating pin package with CNOMO mounting pattern - Size 63 mm - iØ 20 mm rod termination

WEIGHT 2.2 kg
min. stroke version

WEIGHT 2.3 kg
max. stroke version

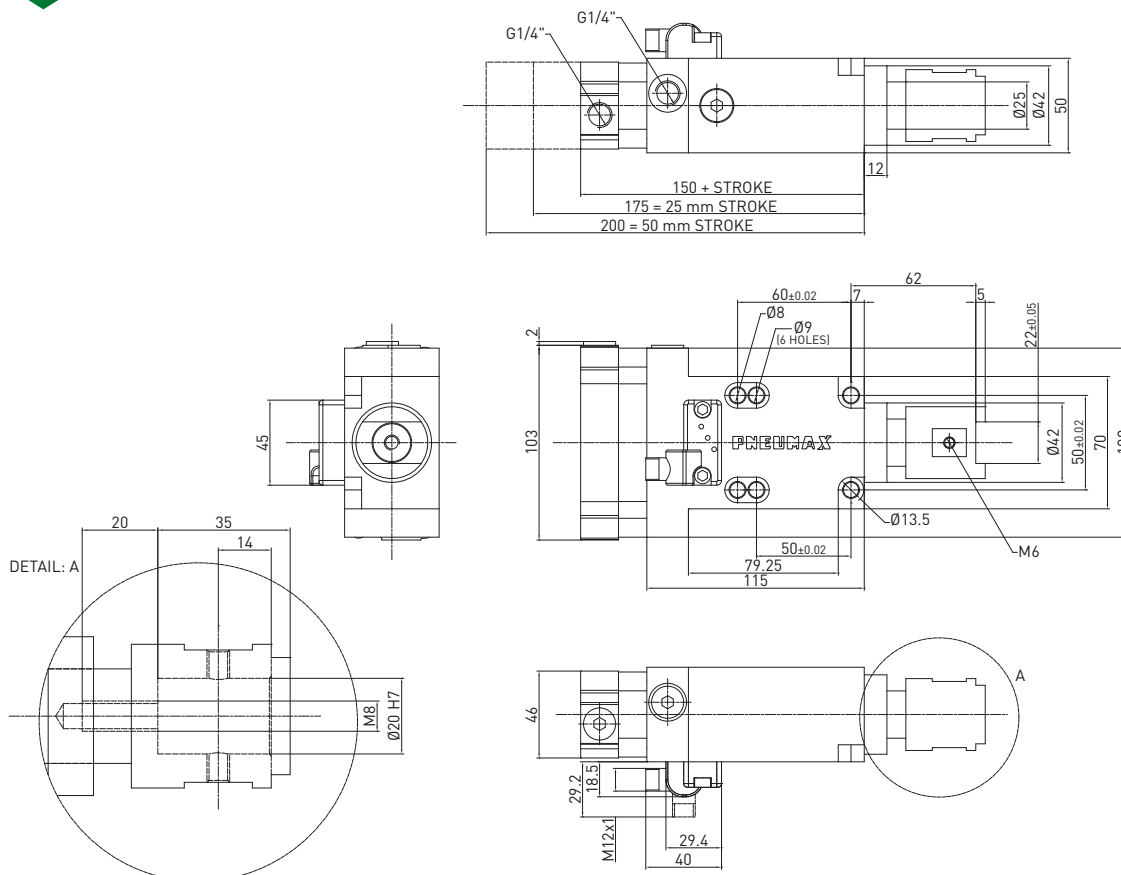

REV. 01 - 22/10/2015

RCD50_1 / Retractable locating pin package with CNOMO mounting pattern and manual operation

Size 50 mm - iØ 12 mm rod termination


WEIGHT 1.8 kg
min. stroke version

WEIGHT 1.9 kg
max. stroke version

Handle swivel angle

Stroke	A Handle swivel angle	B Handle swivel angle
25	70°	38°
50	25°	83°

Max Hand Force: 200 N

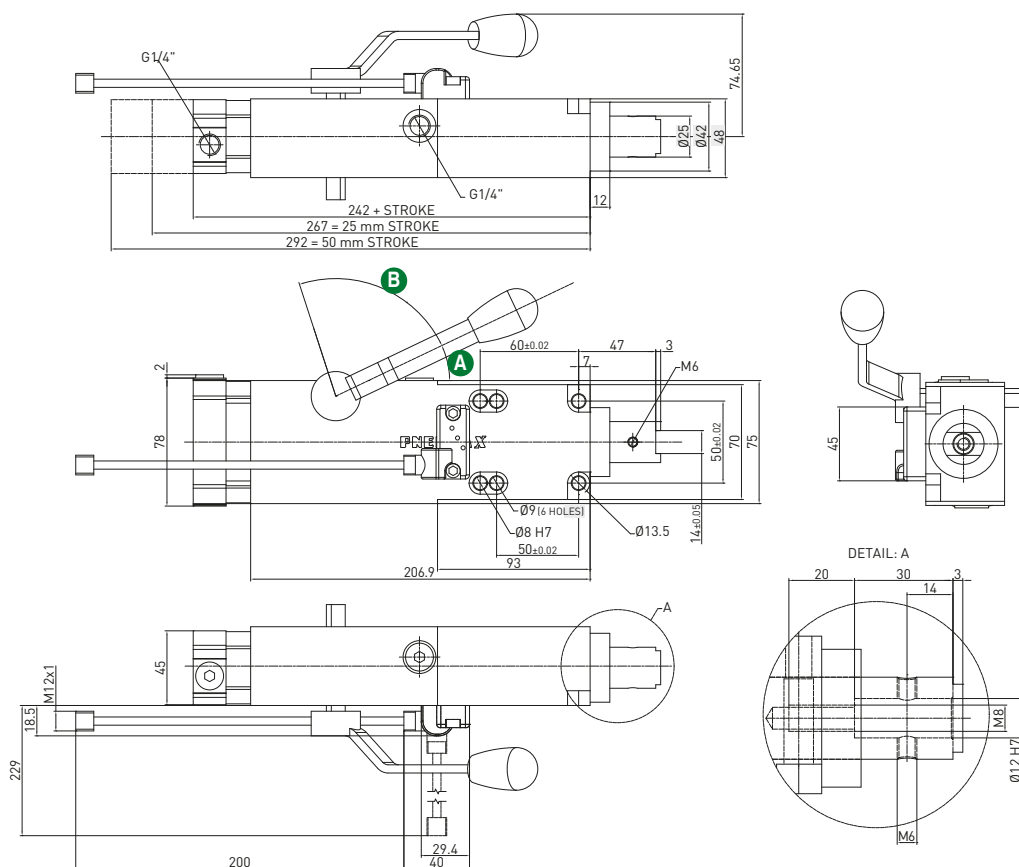

REV. 00 - 31/07/2018

RCD50_2 / Retractable locating pin package with CNOMO mounting pattern and manual operation

Size 50 mm - iØ 20 mm rod termination


WEIGHT 2 kg
min. stroke version

WEIGHT 2.1 kg
max. stroke version

Handle swivel angle

Stroke	A Handle swivel angle	B Handle swivel angle
25	70°	38°
50	25°	83°


Max Hand Force: 200 N

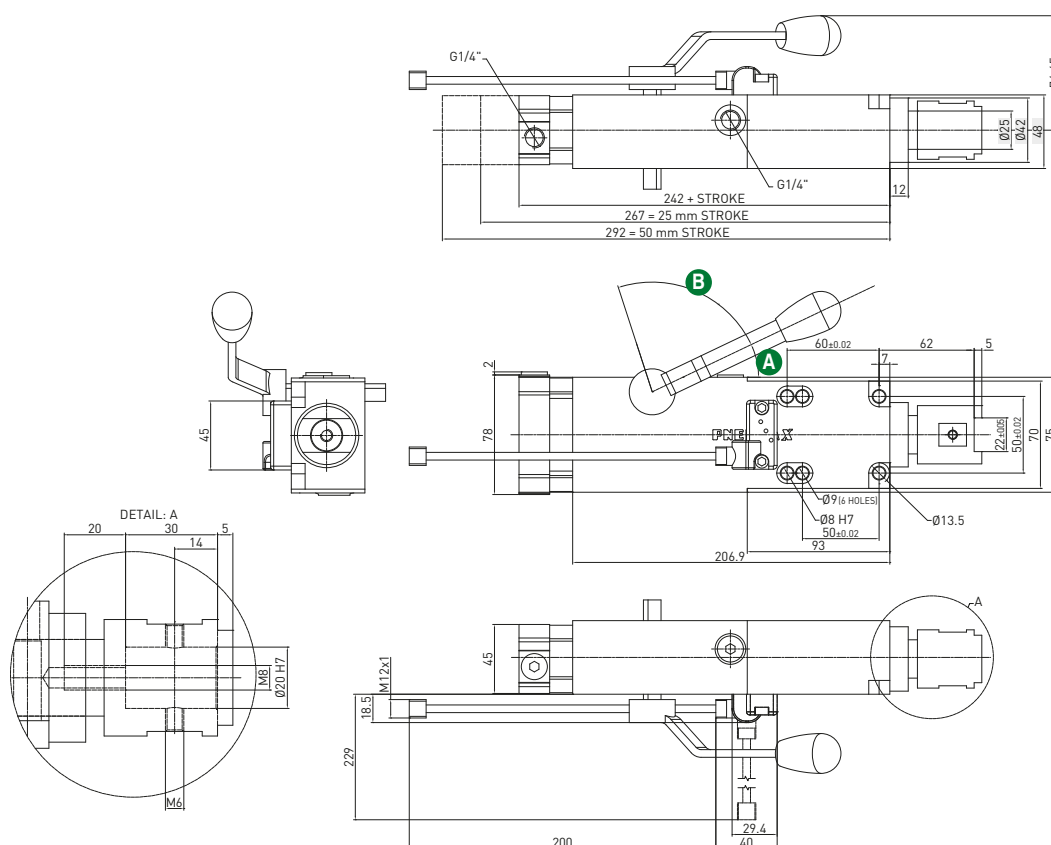

REV. 00 - 31/07/2018

RCD63__1 / Retractable locating pin package with CNOMO mounting pattern and manual operation

Size 63 mm - iØ 12 mm rod termination

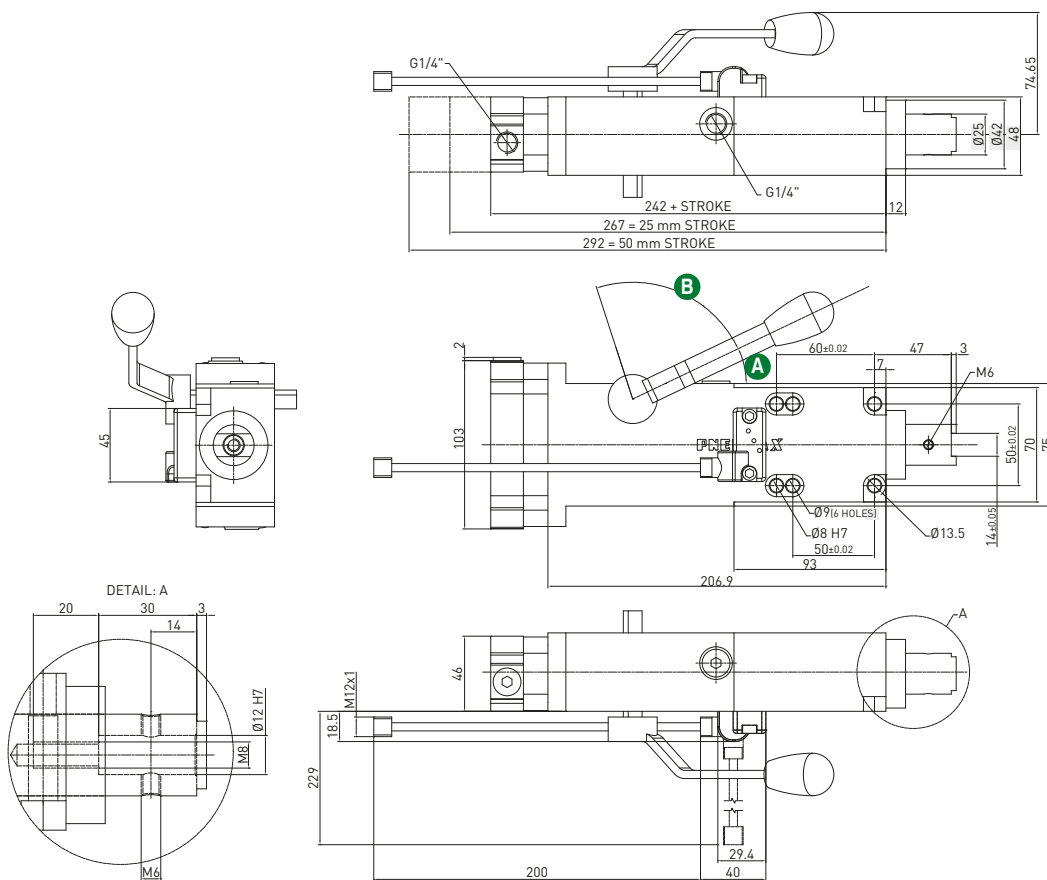

WEIGHT 2 kg
min. stroke version

WEIGHT 2.1 kg
max. stroke version

Handle swivel angle


Stroke	A Handle swivel angle	B Handle swivel angle
25	70°	38°
50	25°	83°

Max Hand Force: 200 N

REV. 00 - 31/07/2018

RCD63__2 / Retractable locating pin package with CNOMO mounting pattern and manual operation

Size 63 mm - iØ 20 mm rod termination

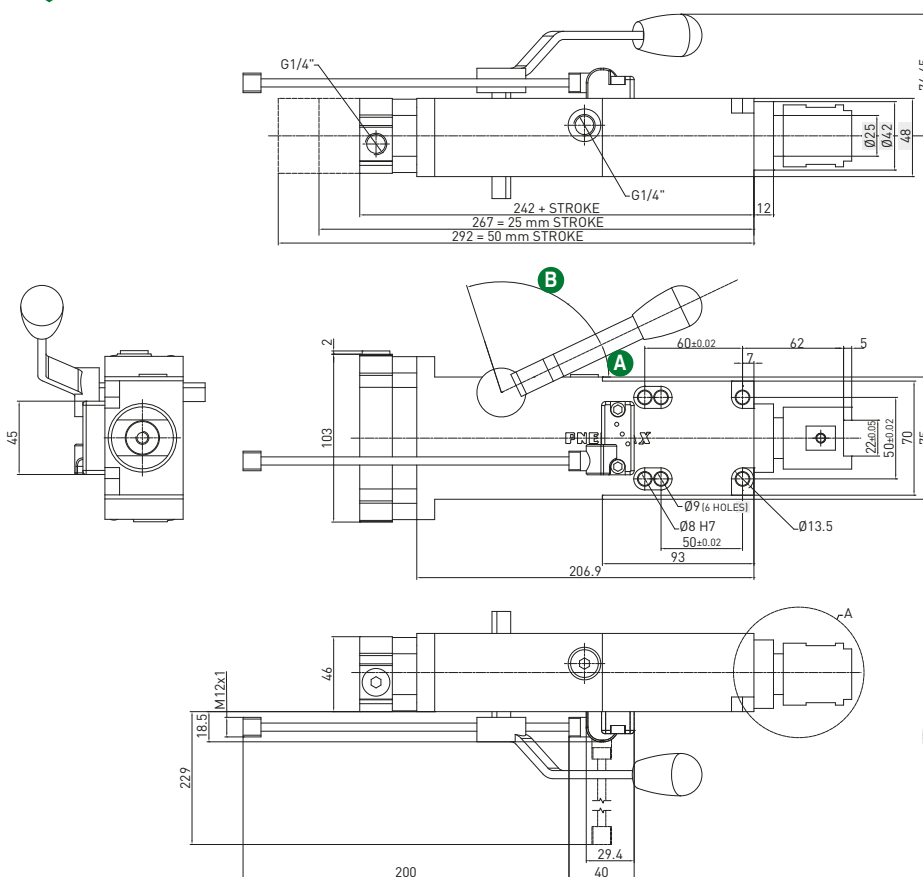

WEIGHT 2.2 kg
min. stroke version

WEIGHT 2.3 kg
max. stroke version

Handle swivel angle

Stroke	A Handle swivel angle	B Handle swivel angle
25	70°	38°
50	25°	83°

Max Hand Force: 200 N

REV. 00 - 31/07/2018

HP-Series

High Performance retractable locating pin package



Technical features

Pneumatic ports on both sides of the cylinder.

Operating features

Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 50 mm

• Max deflection

Stroke	Load (kg)	Load position A deviation (mm)	Load position B deviation (mm)	Load position C deviation (mm)
60 mm	0.5	0.007	0.012	0.01
	1	0.013	0.025	0.023
	1.5	0.02	0.04	0.036
	2	0.03	0.053	0.049
	2.5	0.038	0.067	0.064
	3	0.045	0.082	0.075
50 mm	0.5	0.006	0.009	0.007
	1	0.013	0.02	0.018
	1.5	0.021	0.032	0.028
	2	0.026	0.047	0.043
	2.5	0.032	0.66	0.057
	3	0.037	0.075	0.068
40 mm	0.5	0.004	0.009	0.004
	1	0.009	0.02	0.009
	1.5	0.013	0.032	0.013
	2	0.018	0.047	0.018
	2.5	0.022	0.66	0.022
	3	0.026	0.075	0.026
25 mm	0.5	0	0.005	0
	1	0.005	0.015	0.005
	1.5	0.007	0.032	0.007
	2	0.011	0.047	0.011
	2.5	0.012	0.66	0.012
	3	0.014	0.075	0.014
15 mm	0.5	0	0.005	0
	1	0.002	0.018	0
	1.5	0.004	0.025	0.002
	2	0.007	0.033	0.006
	2.5	0.012	0.043	0.009
	3	0.014	0.052	0.013

• Functional data (at 5 bar / 72.5 psi)

Thrust force	825 N
Pull force	1.960 N
Max bending moment	3 N m / 2.21 lb-ft
Max distance from the load centre to the rod	200 mm


• Cycle time for max stroke

< 0.8 s **NO flow valve required**

• Air consumption


Air consumption for complete cycle

REV. 00 - 18/06/2015

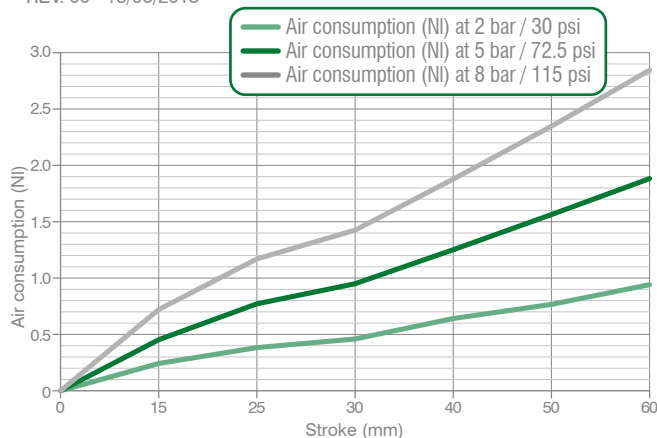


Load position **A**

Horizontal mounting position of the retractable locating pin/load centre on the rod




Load position **B**

Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Load position **C**

Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Ordering string

HP-Series

HP 50 E 40 G 3 3

HP VERSION **HP** = High Performance retractable locating pin package

50 SIZE **50** = Ø 50 mm


E SENSOR
E = electronic sensor with M12 swivel connector - PNP
A = electronic sensor with M12 swivel connector - NPN
N = no sensor
B = electronic sensor with M8 swivel connector - PNP

40 STROKE
15 = 15 mm
25 = 25 mm
40 = 40 mm
50 = 50 mm
60 = 60 mm

G PORTS **G** = G thread – BSPP

3 ROD TERMINATION
1 = iØ 16 mm cross-cut key rod termination
2 = iØ 10 mm cross-cut key rod termination
3 = rod termination for offset pins
4 = rod termination with key
5 = iØ 10 mm flat termination
6 = iØ 12 mm flat termination






3 ROD ORIENTATION
(for termination type 3)



HP50E_1 / High Performance retractable locating pin package - Size 50 mm - iØ 16 mm cross-cut key rod termination



WEIGHT 2.2 kg
min. stroke version

WEIGHT 2.5 kg
max. stroke version

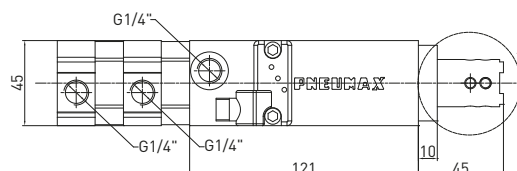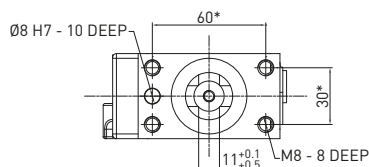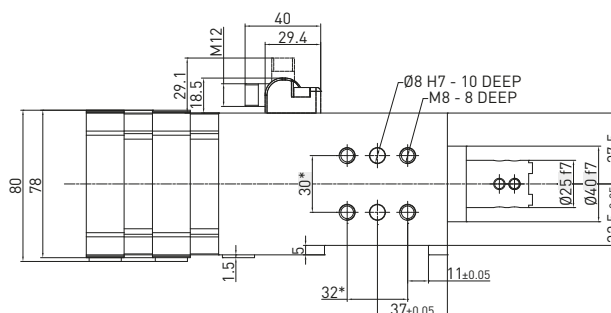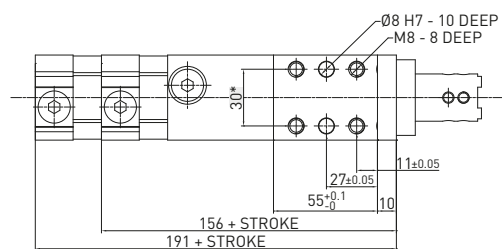




REV. 01 - 26/02/2016

HP50E_2 / High Performance retractable locating pin package - Size 50 mm - iØ 10 mm cross-cut key rod termination

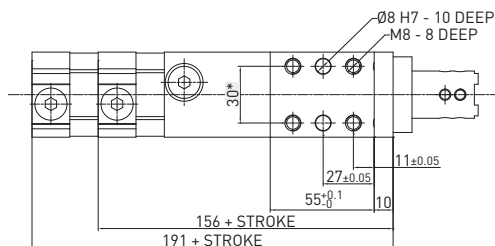




WEIGHT 2.2 kg
min. stroke version

WEIGHT 2.5 kg
max. stroke version

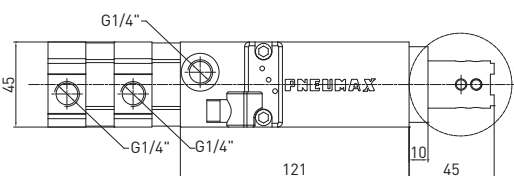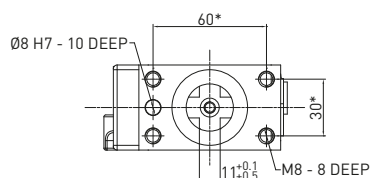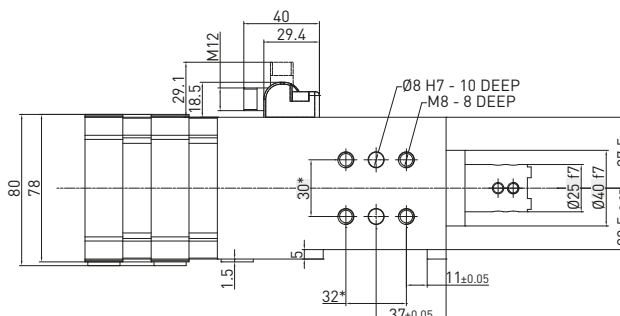



REV. 01 - 26/02/2016

HP50E_3 / High Performance retractable locating pin package - Size 50 mm - Rod termination for offset pins

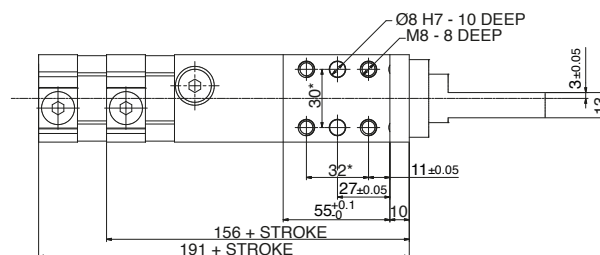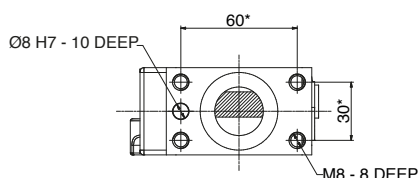

WEIGHT 2.2 kg
min. stroke version

WEIGHT 2.5 kg
max. stroke version

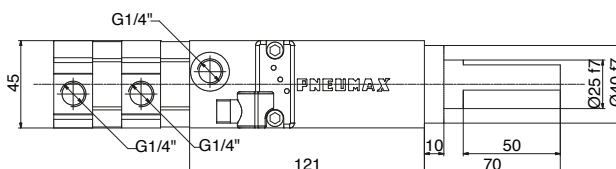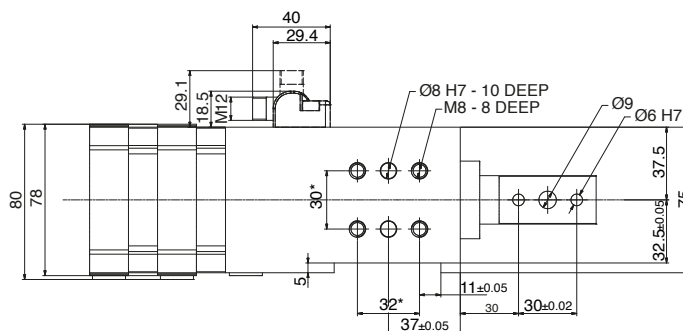

REV. 01 - 29/05/2024

LOCATING

REV. 00 - 31/03/2015

F-Series

Retractable locating pin packages with dual rods



Technical features

Pneumatic ports on both sides of the cylinder.

Operating features

Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 40-41 mm

• Max deflection

Stroke	Load (kg)	Load position A deviation (mm)	Load position B deviation (mm)	Load position C deviation (mm)
40 mm	0.5	0.004	0.021	0.003
	1	0.01	0.05	0.01
	1.5	0.015	0.08	0.019
	2	0.022	0.122	0.028
	2.5	0.03	0.158	0.037
	3	0.035	0.195	0.046
20 mm	0.5	0.004	0.013	0.005
	1	0.009	0.035	0.008
	1.5	0.013	0.053	0.011
	2	0.017	0.083	0.017
	2.5	0.021	0.107	0.021
	3	0.026	0.13	0.025

• Functional data (at 5 bar / 72.5 psi)

Thrust force	430 N
Pull force	630 N
Max bending moment	3 N m / 2.21 lb-ft
Max distance from the load centre to the rod	200 mm


• Cycle time for max stroke

< 0.8 s NO flow valve required

• Air consumption

Air consumption for complete cycle

REV. 00 - 18/06/2015

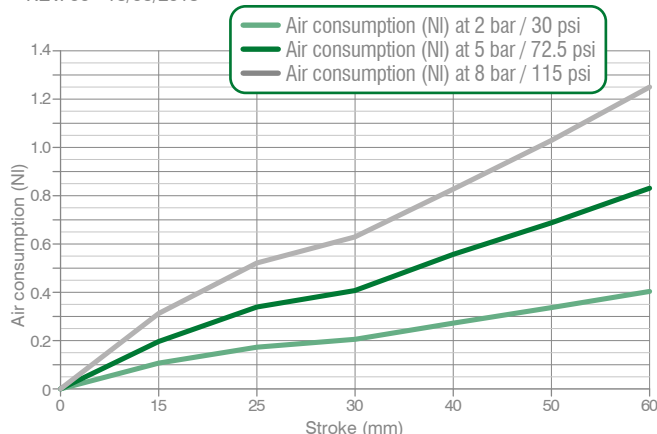


Load position **A**

Horizontal mounting position of the retractable locating pin/load centre on the rod




Load position **B**

Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Load position **C**

Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Size 63 mm

• Max deflection

Stroke	Load (kg)	Load position A deviation (mm)	Load position B deviation (mm)	Load position C deviation (mm)
60 mm	0.5	0.003	0.009	0
	1	0.007	0.026	0.001
	1.5	0.013	0.043	0.007
	2	0.017	0.063	0.009
	2.5	0.022	0.085	0.018
	3	0.026	0.109	0.023
	3.5	0.031	0.129	0.033
	4	0.036	0.148	0.042

• Functional data (at 5 bar / 72.5 psi)

Thrust force	1,350 N
Pull force	1,550 N
Max bending moment	4 N m / 2.95 lb·ft
Max distance from the load centre to the rod	200 mm


• Cycle time for max stroke

< 0.8 s NO flow valve required

• Air consumption

Air consumption for complete cycle

REV. 00 - 18/06/2015

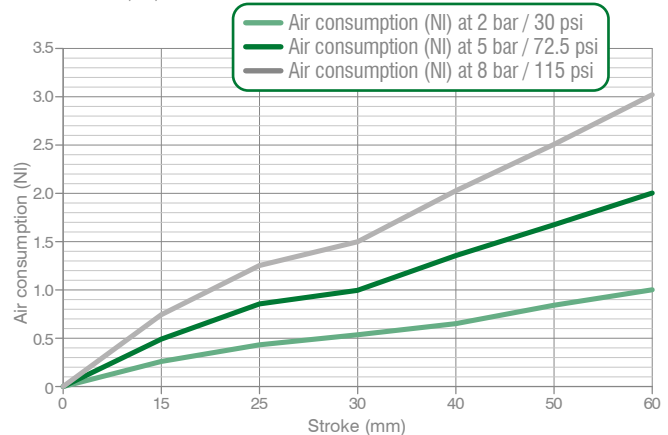


Load position **A**

Horizontal mounting position of the retractable locating pin/load centre on the rod




Load position **B**

Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Load position **C**

Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Ordering string

F-Series 40-41

F **P** **40** **E** **20** **3** **G**

F	VERSION	F = Retractable locating pin package with dual rod
P	OPERATION	P = pneumatic
40	SIZE	40 = Ø 40 mm mounting pattern 35x25 mm 41 = Ø 40 mm mounting pattern 30x25 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
20	STROKE	20 = 20 mm 40 = 40 mm
3	ROD TERMINATION	1 = rod termination type 3 with improved radius 2 = rod termination type 7 with improved radius 3 = rod termination for offset pins – with 4 dowel holes (see datasheet) 7 = rod termination for offset pins – with 2 dowel holes (see datasheet)
G	PORTS	G = G thread – BSPP

Ordering string

F-Series 63


F P 63 E 60 3 G

LOCATING


F	VERSION	F = Retractable locating pin package with dual rod
P	OPERATION	P = pneumatic D2 = pneumatic with manual operation
63	SIZE	63 = Ø 63 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
60	STROKE	15 = 15 mm 25 = 25 mm 40 = 40 mm 50 = 50 mm 60 = 60 mm
3	ROD TERMINATION	1 = rod termination type 3 with improved radius 3 = rod termination for offset pins
G	PORTS	G = G thread – BSPP

FP40E__1/2/3/7 / Retractable locating pin package with dual rod - Size 40 mm

Mounting pattern 35x25 mm - Rod termination for offset pins




**Rod termination
type 1**

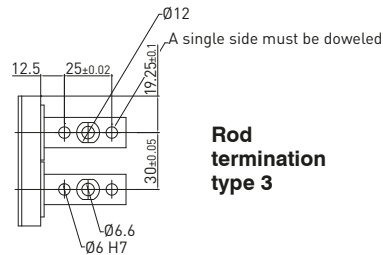


**Rod
termination
type 3**

WEIGHT 1.1 kg
min. stroke version


WEIGHT 1.25 kg
max. stroke version




**Rod termination
type 2**

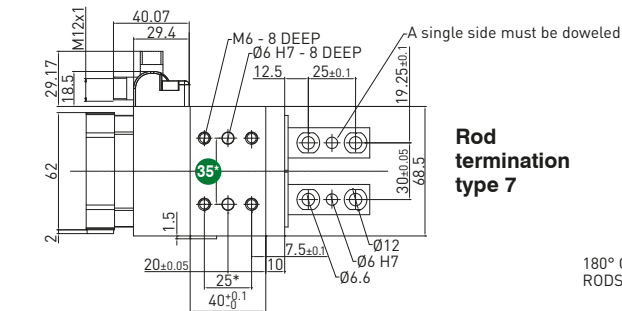


**Rod
termination
type 7**



With improved
radius for
demanding
applications



LOCATING

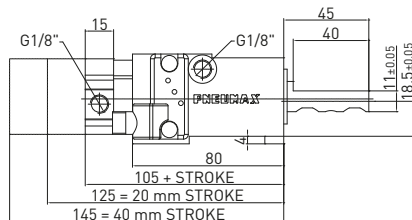


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02
DIMENSIONAL
TOLERANCE FOR THREADED
HOLES: ± 0.1


REV. 02 - 28/06/2018

FP41E__1/2/3/7 / Retractable locating pin package with dual rod - Size 41 mm

Mounting pattern 30x32 mm - Rod termination for offset pins




**Rod termination
type 1**




**Rod
termination
type 3**

WEIGHT 1.1 kg
min. stroke version


WEIGHT 1.25 kg
max. stroke version





**Rod termination
type 2**

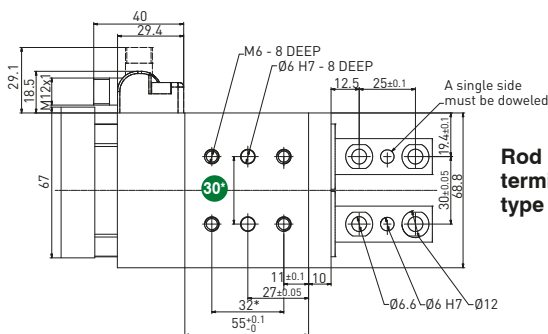

**Rod
termination
type 7**



With improved
radius for
demanding
applications

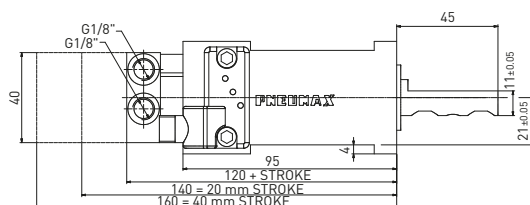


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02
DIMENSIONAL
TOLERANCE FOR THREADED
HOLES: ± 0.1

REV. 02 20/11/2020





FP63E__1/3 / Retractable locating pin package with dual rod - Size 63 mm - Rod termination for offset pins

WEIGHT 3.35 kg
min. stroke version


WEIGHT 3.65 kg
max. stroke version

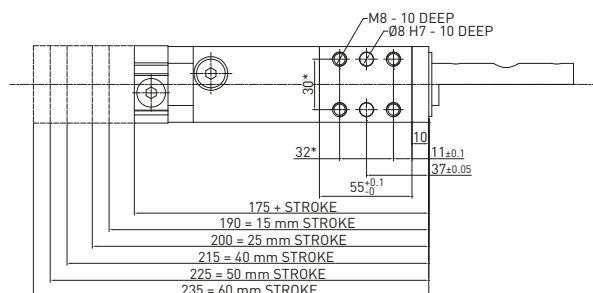

With improved
radius for
demanding
applications

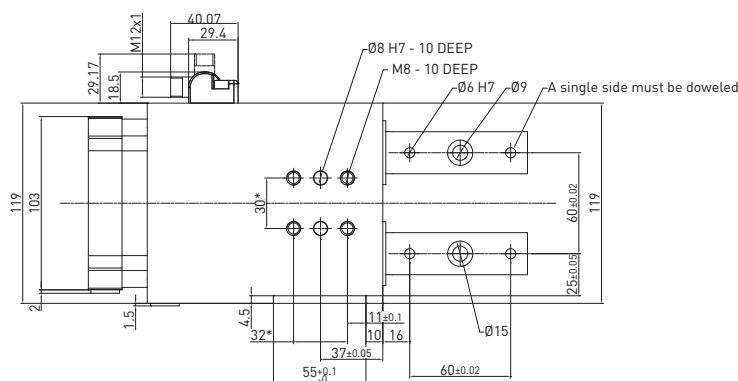

Rod termination 1

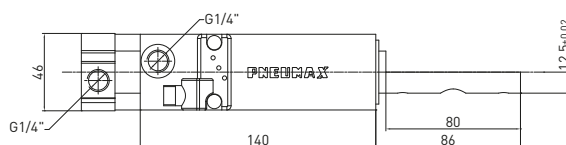

Rod termination 3

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02

DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

REV. 01 - 10/04/2017


FD263E_ _ 1/3 / Retractable locating pin package with dual rod - Size 63 mm - Rod termination for offset pins

WEIGHT 4.7 kg
min. stroke version


WEIGHT 5 kg
max. stroke version

Max Hand Force: 200 N

With improved
radius for
demanding
applications



LOCATING

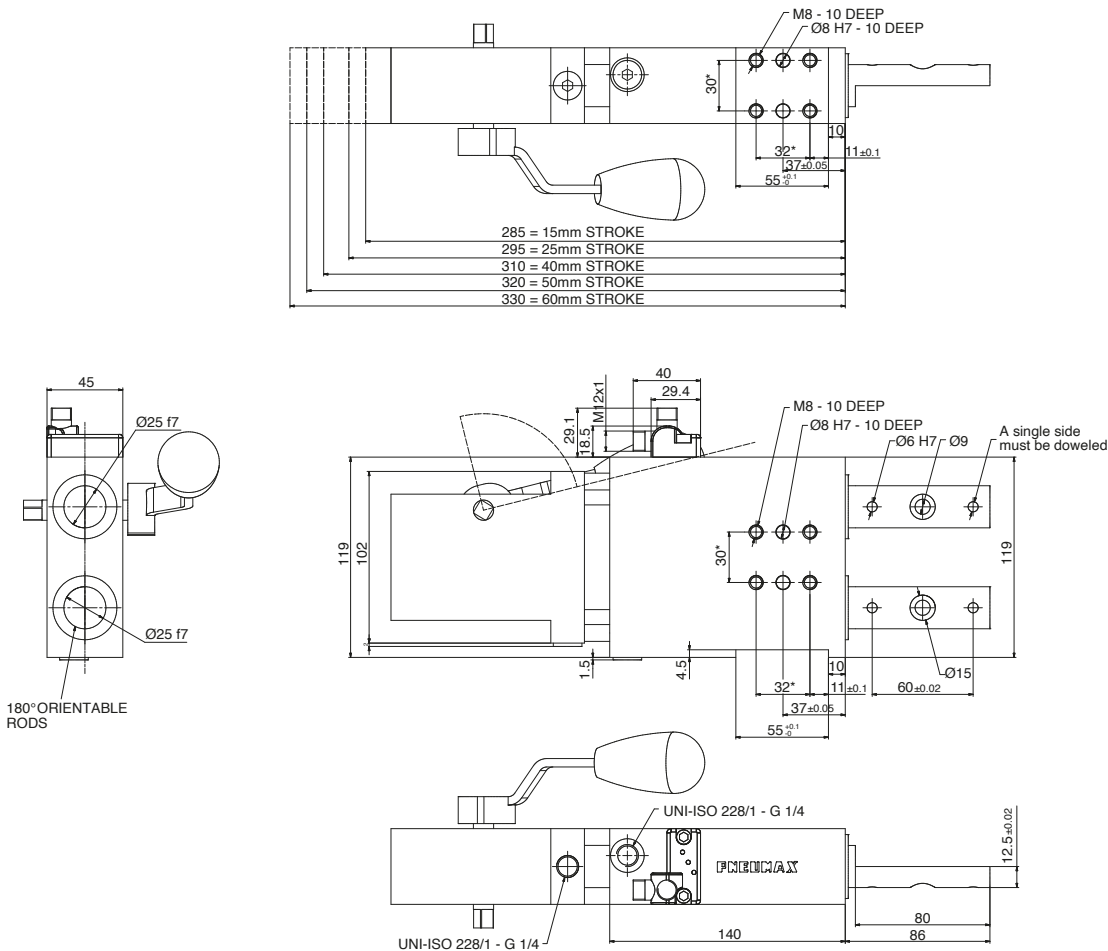

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02
DIMENSIONAL
TOLERANCE FOR THREADED
HOLES: ± 0.1

REV. 00 - 02/04/2020

FT-Series

Retractable locating pin packages with dual rods and toggle linkage



- Fully encapsulated toggle mechanism: in case of air loss, the working position remains secure
- Manual unlock mechanism to disengage the linkage in emergency situations
- Position repeatability ± 0.05 mm
- Clear design with user-friendly surfaces and no dirt or welding deposit traps

Technical features

Pneumatic ports on both sides of the cylinder.

Operating features

Operating pressure from 2 to 8 bar / from 30 to 115 psi

Lubrication all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

Size 32 mm

• Functional data (at 5 bar / 72.5 psi)

Thrust force	600 N
Max offset	100 mm from the rod axis
Max load	2 Kg
Position repeatability	$\pm 0,05$ mm

The thrust force is only available with the last 2 mm stroke of working (extracting) position. In the other range of the stroke, the force is 30% of the above value.

• Cycle time

< 0.8 s for 25 mm stroke- no flow valve required

Size 50 mm

• Max deflection

Stroke	Load (kg)	Load position B deviation (mm)	Load position C deviation (mm)
40 mm	0.5	0.001	0.002
	1	0.001	0.002
	1.5	0.001	0.002
	2	0.001	0.002
	2.5	0.001	0.004
	3	0.001	0.004
	3.5	0.002	0.004
	4	0.002	0.004

• Functional data (at 5 bar / 72.5 psi)

Thrust force	4900 N
Pull force	2000 N
Max distance from the load centre to the rod	200 mm


The thrust and pull forces (retraction) are only available with the last 2 mm stroke of working (extracting) position. In the other range of the stroke, the forces are 30% of the above values.

- Cycle time for max stroke
< 0.8 s NO flow valve required

• Air consumption


Air consumption for complete cycle

REV. 00 - 18/06/2015

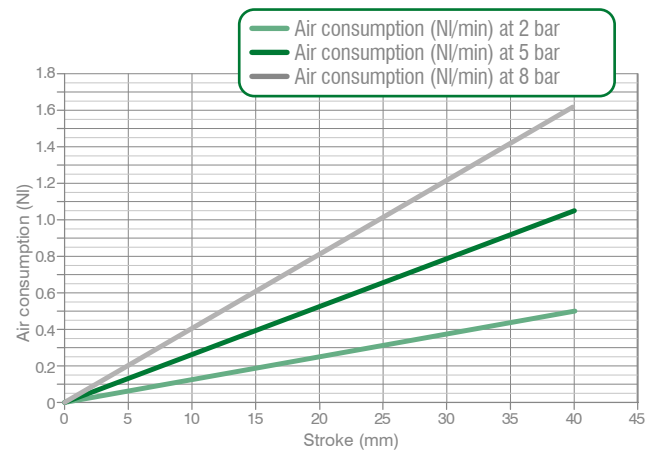


Load position **B**

Horizontal mounting position of the retractable locating pin/load centre at 100 mm from the rod axis



Load position **C**

Vertical mounting position of the retractable locating pin/load centre at 100 mm from the rod axis




Ordering string

FT_32-Series

F T 32 E 25 G 3 2

LOCATING

F	VERSION	F = Retractable locating pin packages with dual rods
T	OPERATION	T = pneumatic with toggle lock TD = pneumatic with manual operation and toggle lock
32	SIZE	32 = Ø 32 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP N = no sensor
25	STROKE	25 = 25 mm
G	PORTS	G = G thread – BSPP
3	ROD TERMINATION	3 = rod termination for offset pins – 2 dowels holes (see datasheet) 7 = rod termination for offset pins – 4 dowel holes (see datasheet)
2	ROD ORIENTATION	2 =  4 = 

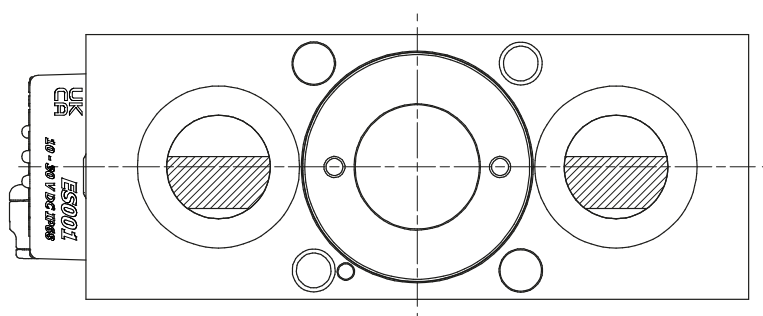


FT_50-Series

F
T
50
E
40
G
5
2

F	VERSION	F = Retractable locating pin packages with dual rods
T	OPERATION	T = pneumatic with toggle lock TD = pneumatic with manual operation and toggle lock
50	SIZE	50 = Ø 50 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP N = no sensor
40	STROKE	40 = 40 mm
G	PORTS	G = G thread – BSPP
3	ROD TERMINATION	3 = Mounting surface on the rods corresponds to the pin package axis 5 = 2.5 mm out of the axis mounting surface
2	ROD ORIENTATION	2 =  4 = 


LOCATING

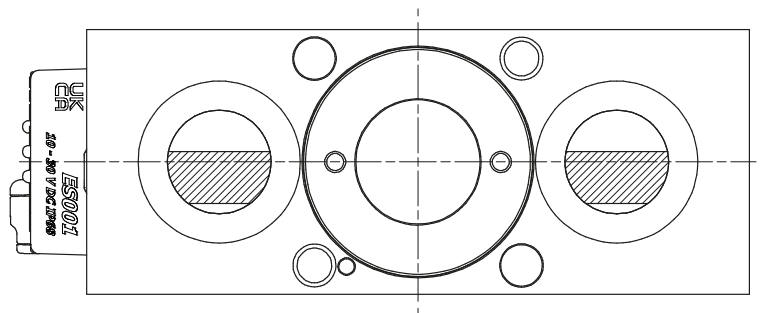

FT32E25G3_ / Retractable locating pin package with dual rods and toggle linkage - Size 32 mm

Rod termination 3 – for offset pins

WEIGHT 2,2 kg

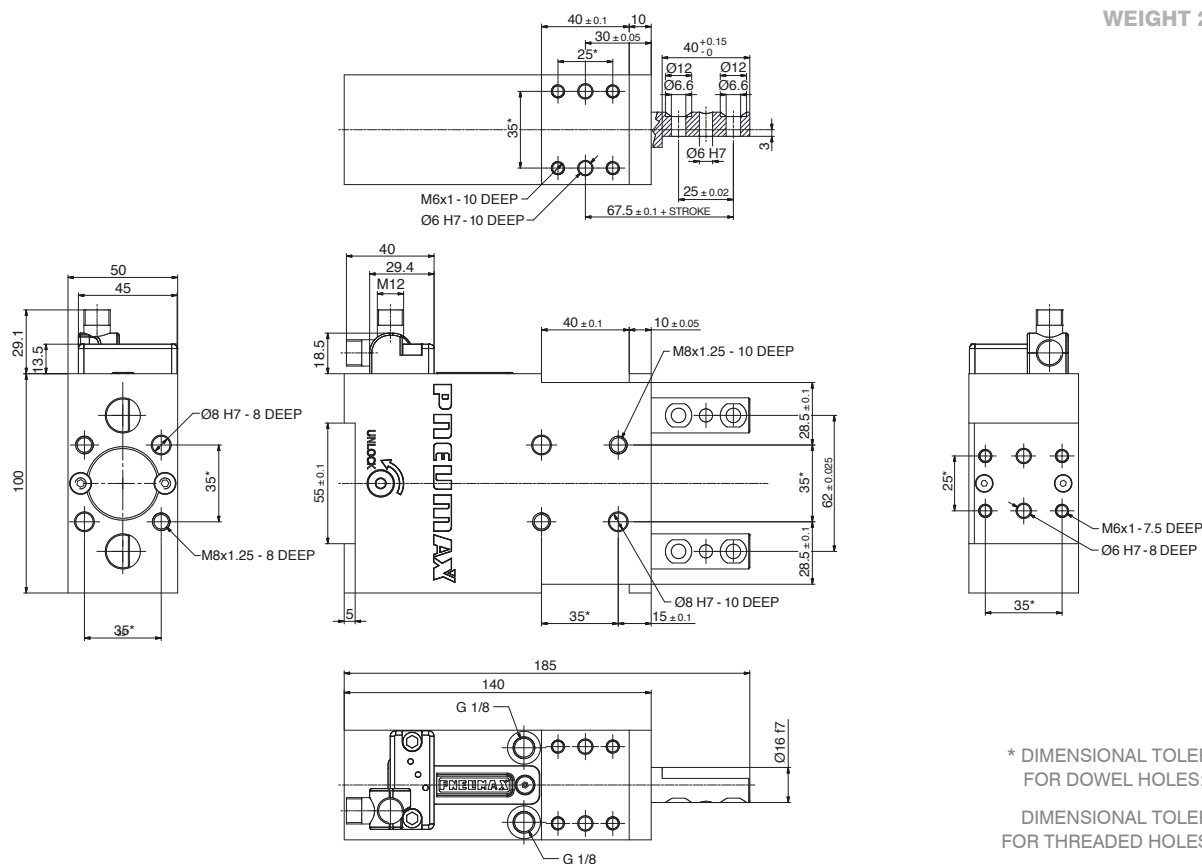


REV. 01 - 24/01/2024

FT32E25G7_ / Retractable locating pin package with dual rods and toggle linkage - Size 32 mm

Rod termination 7 – for offset pins with 2 dowel holes

WEIGHT 2,2 kg

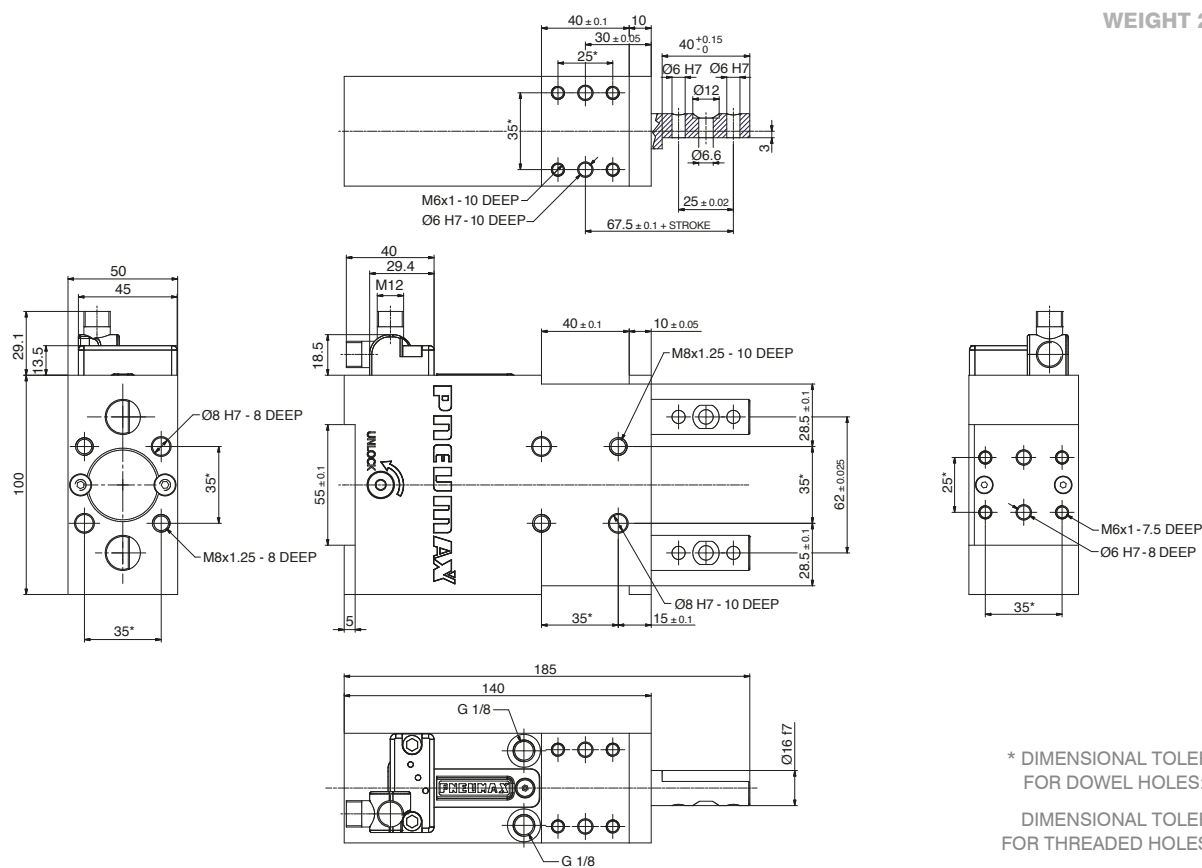

REV. 01 - 24/01/2024


FTD32E25G3_ / Retractable locating pin package with dual rods and toggle linkage and manual operation - Size 32 mm

Rod termination 3 – for offset pins

WEIGHT 3,1 KG

Handle included

Max Hand Force: 200 N

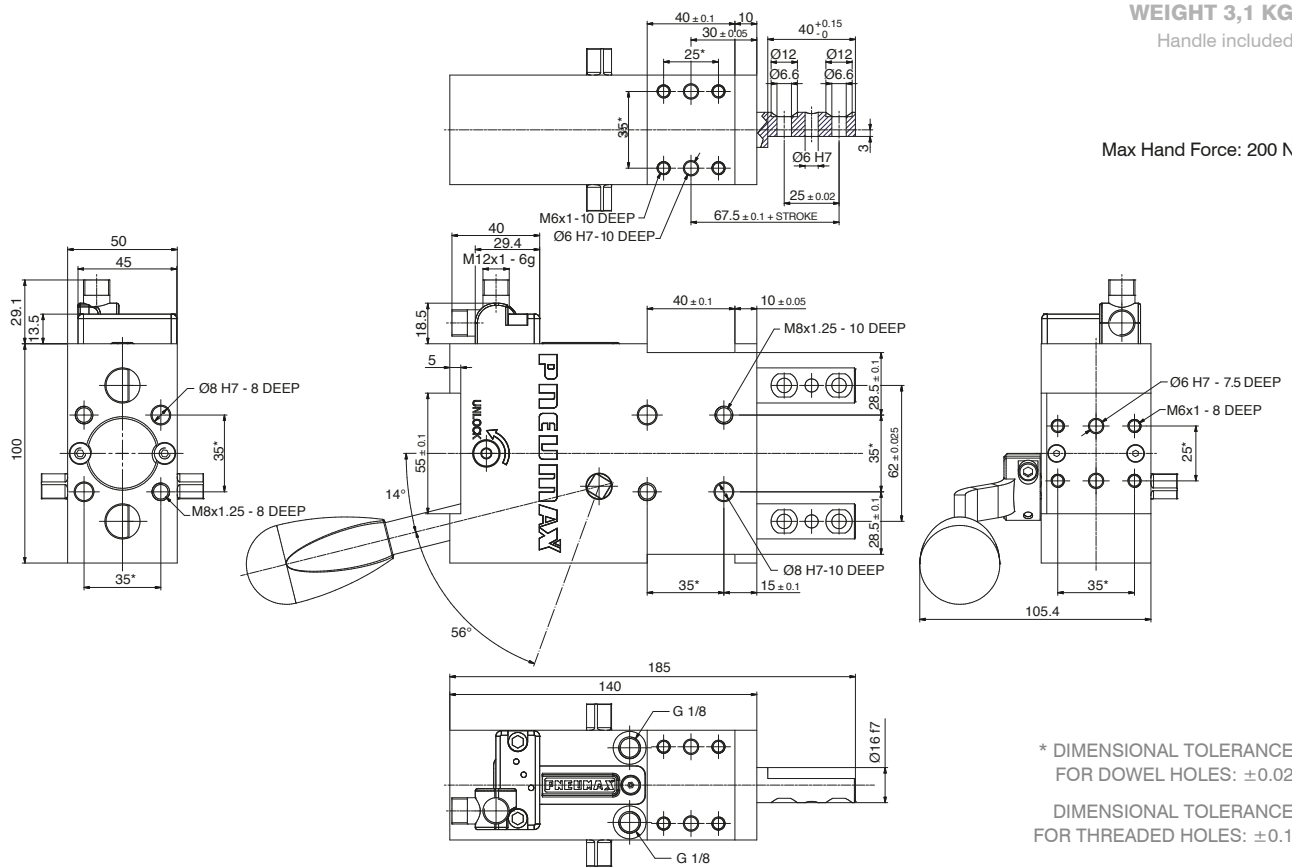

REV. 01 - 24/01/2024


FTD32E25G7_ / Retractable locating pin package with dual rods and toggle linkage and manual operation - Size 32 mm

Rod termination 7 – for offset pins with 2 dowel holes

WEIGHT 3,1 KG

Handle included

Max Hand Force: 200 N

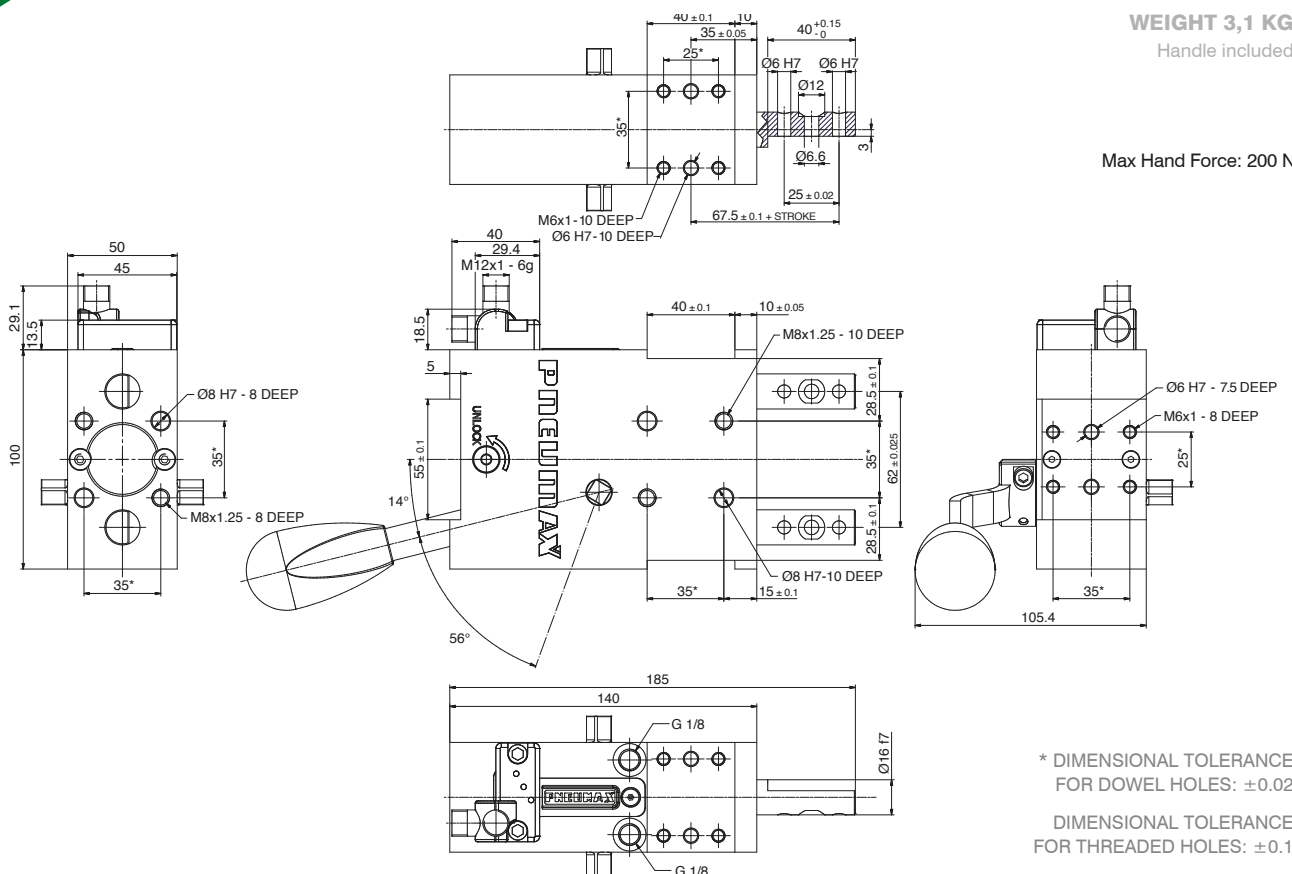


REV. 01 - 24/01/2024

FT50E40G3_ / Retractable locating pin package with dual rods and toggle linkage - Size 50 mm

Rod termination 3 – in line to the pin package axis

WEIGHT 7 kg

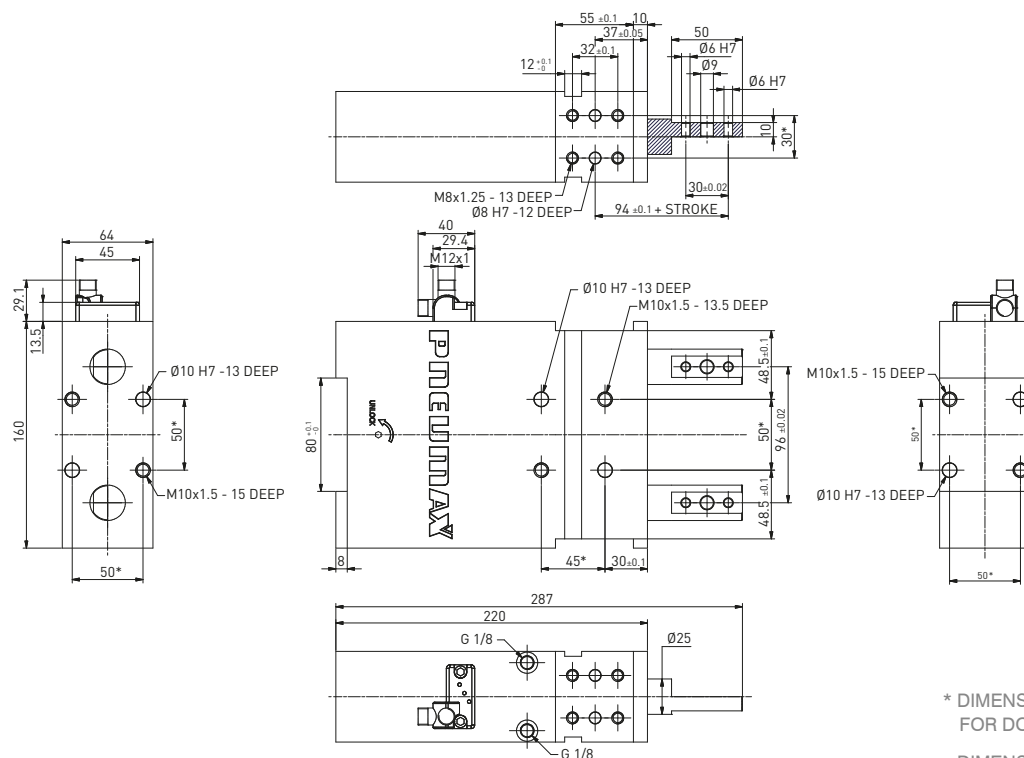

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 01 - 27/04/2021

FT50E40G5_ / Retractable locating pin package with dual rods and toggle linkage - Size 50 mm

Rod termination 5 – 2.5 mm out of axis mounting surface

WEIGHT 7 kg

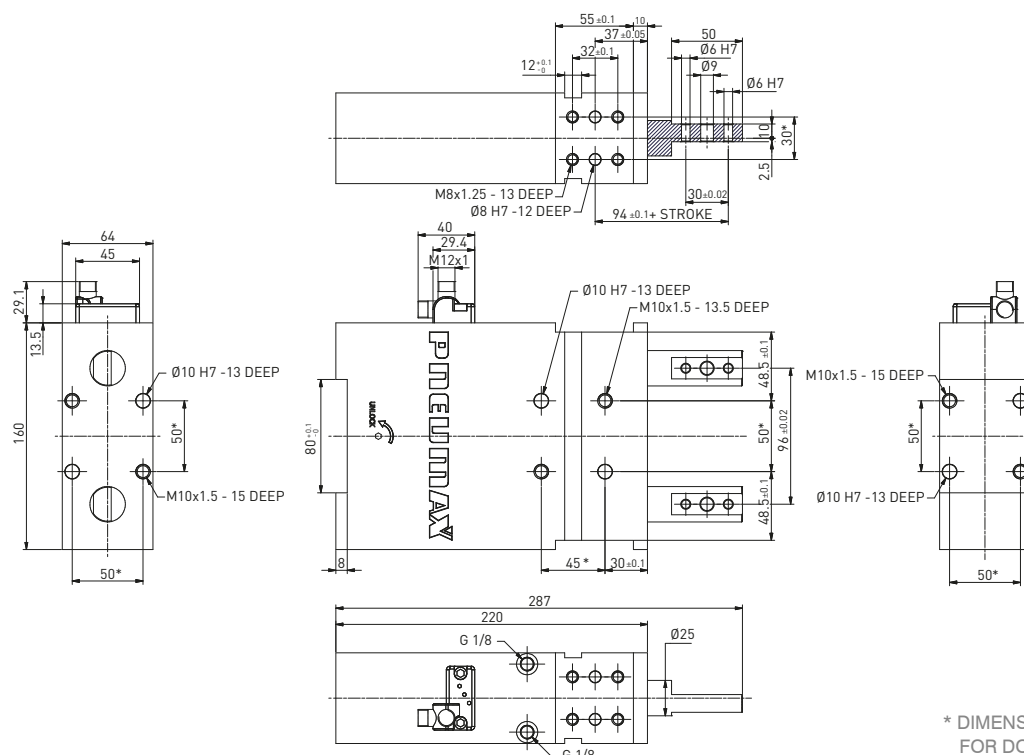

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 01 - 27/04/2021


FTD50E40G3_ / Retractable locating pin package with dual rods and toggle linkage and manual operation - Size 50 mm

Rod termination 3 – in line to the pin package axis

WEIGHT 7,5 KG

Handle included

Max Hand Force: 200 N

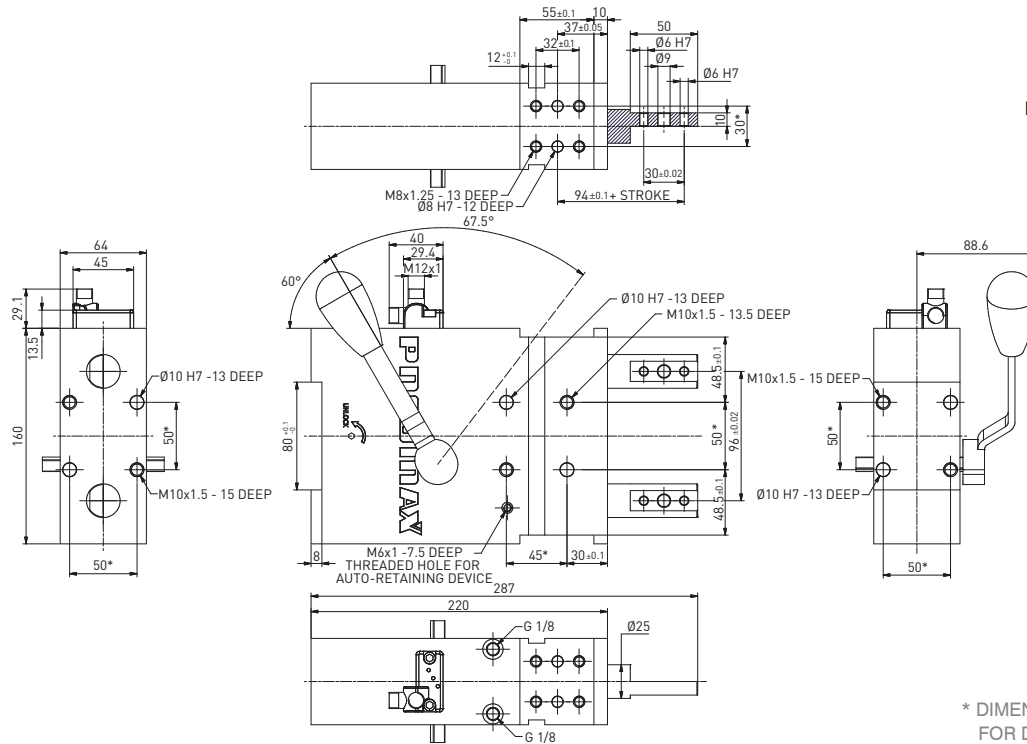

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 02 - 08/11/2022


FTD50E40G5_ / Retractable locating pin package with dual rods and toggle linkage and manual operation - Size 50 mm

Rod termination 5 – 2.5 mm out of axis mounting surface

WEIGHT 7,5 KG

Handle included

Max Hand Force: 200 N

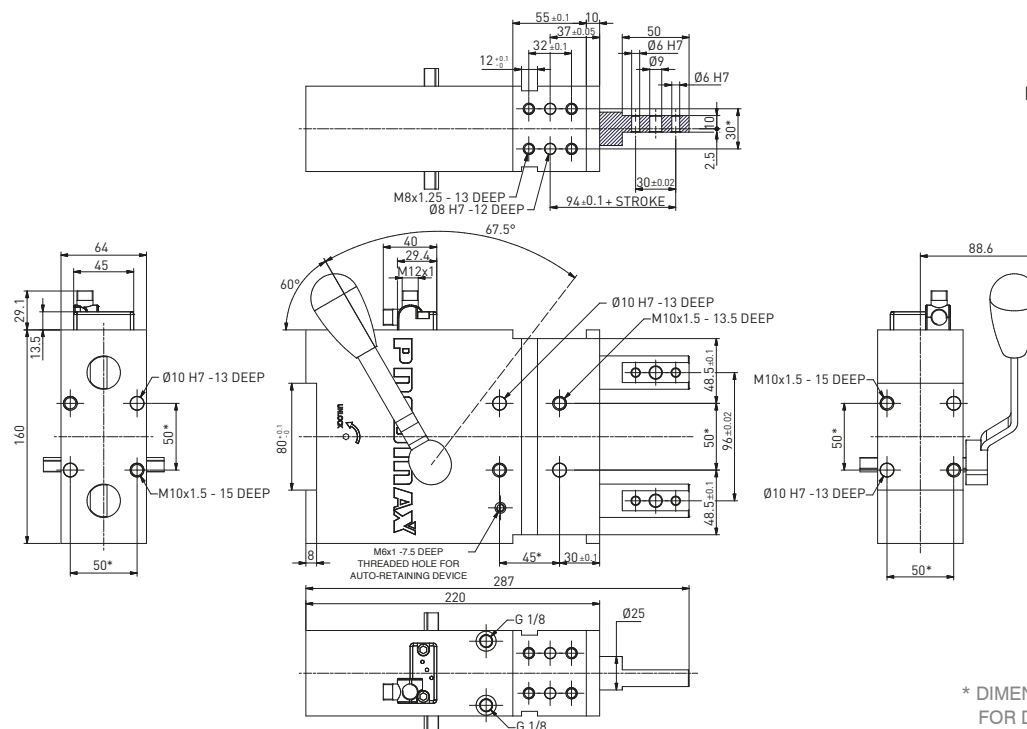

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 02 - 08/11/2022

Locating

Quick installation guide



Caution

Any maintenance operation may only be carried out by qualified and authorized personnel. For any reason, do not reach into the pivoting range of the clamping arms, when the clamps are in operation. Disconnect and lock out pneumatic and electric supply lines before operating on or around clamps.

A worksheet for the right sizing of the pin packages is available upon request. Visit our website for technical documents

<http://automotive.pneumax.it/>



Pressure operating range: from 2 to 8 bar/ from 30 to 115 psi.
Inline lubrication isn't required: if lubricated air is used, it is necessary to continue using lubricated air, as the oil in it may have removed the basic lubrication in the device.

Functional description

Retractable locating pin packages

When operated, the cylinder **extends and retracts the rod**.

Anti-rotation mechanism. A dual piston rod guiding grants positional **accuracy and repeatability**.



Retractable locating pin packages with CNOMO mounting pattern

When operated, the cylinder **extends and retracts the rod**.

Anti-rotation mechanism.

A dual piston rod guiding grants positional **accuracy and repeatability**. Please refer to the catalogue for the deviation values for different strokes and load.



High Performance retractable locating pin packages

Pneumatic tandem pin package with **large output force**. Pressure is applied to both pistons resulting in an approximately doubled piston output force of a corresponding piston diameter. Appreciable **saving in bulk** and weight due to the all-aluminium housing, which comprises the head cap. **Anti-rotation** mechanism. A dual piston rod guiding grants positional **accuracy and repeatability**.



Retractable locating pin packages with dual rods

When operated, the cylinder **extends and retracts the rods**, which could be **rotated by 180°**, thus achieving a **symmetrical rod orientation**. A dual piston rod guiding grants positional **accuracy and repeatability**. Make sure that the rods are doweled only on a single side to avoid any misalignment. Please refer to the catalogue for the deviation values for different strokes and load.



The clamp is warranted for 3 mln cycles in correct operating conditions

No lubrication.

No preventive maintenance.

The pin packages do not require any specific adjustment.

The rod alignment as well as the anti-rotation are set in the manufacturing department and do not require any adjustment on-site.

External cleaning with non-corrosive detergents is required: cleaning interval depends on the ambient conditions as well as on the frequency of use.



Pin package installation to the tool

The pin package can be installed by one of its three mounting surfaces, using dowels and screws according to its datasheet. The tightening torques to be set are:

M6 10 N m / 7.37 lb-ft

M8 25 N m / 18.43 lb-ft

Use the key support surfaces, where available.

Always use all the bores on the mounting pattern.


Electronic sensor

ES001 is used for all pin packages' sizes and series. Stepless adjustment of the connector: unscrew the tightening screw and set the connector in the required position, then secure the screw with 5 N m / 3.68 lb-ft.

To replace the sensor, remove the M5 screw and assemble a new one by tightening the same screw with 5 N m / 3.68 lb-ft.



Technical features	
Operating voltage	10-30 VDC
Voltage drop	≤ 2 V
Load current	≤ 100 mA
Current consumption	≤ 30 mA
Short-circuit protection	protected
Protection rating	IP68
Operating temperature	-0 °C +50 °C
Storage temperature	-25 °C +60 °C
Electromagnetic compatibility	EN IEC 60947-5-2
Power supply indication	green LED
Open position indication	yellow LED
Closed position indication	red LED

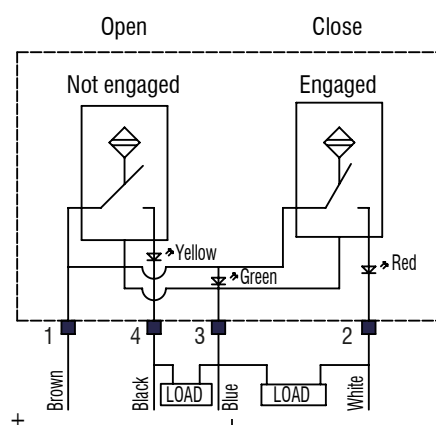

Simplified diagram (PNP)

Handling

Pneumatic gripper clamps with fully adjustment opening angle



Quick set-up



No flow valve required




Toggle-joint mechanism

Compact gripper clamps with toggle-joint mechanism, to secure the workpiece clamping in case of air loss: the jaws remain locked in closed position.

Mainly used to **hold the workpiece on edges or through holes – from above or below – and to transfer parts.**

The shortest set-up time in the market

Easy field adjustment of the opening angle, from the rear or front side of the gripper clamp with the shortest set-up time in the market.

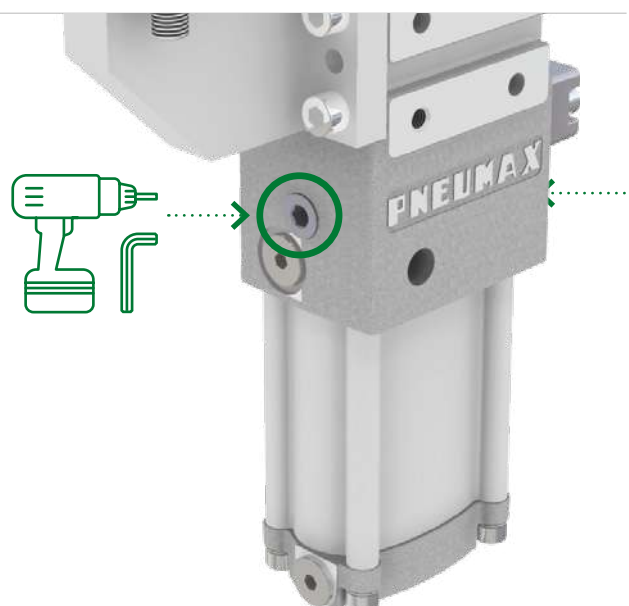

Handling products

J-Series

Complete reliability of the angle adjustment over time integrated mechanism secures the adjusted position and prevents any sliding or opening angle displacement. A **retain mechanism** secures the **adjustment tool in its seat** and prevents the Allen wrench to fall down during the adjustment procedure.

Even without air, the clamp can be toggle-locked through the adjustment means.




Sealed roller bearings

Lightweight design, which does not compromise the stiffness and strength of the housings.


Equipped with sealed roller bearings, to ensure a high protection degree against contaminants > **fully encapsulated housing**.

No flow valve required

No slamming towards the opening position due to an optimal integrated cushioning system.

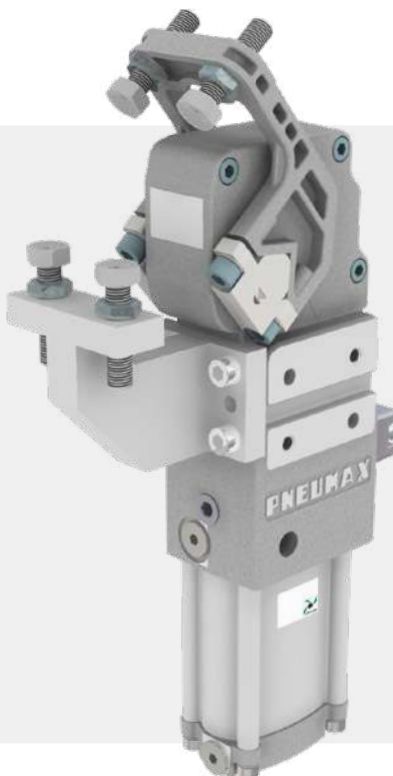

J-Series

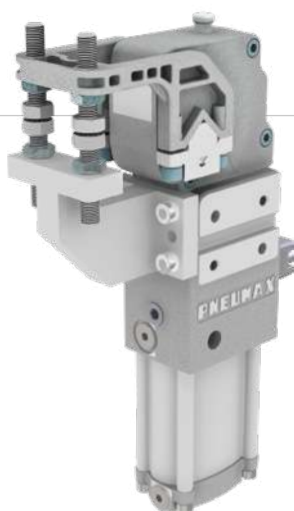

Pneumatic gripper clamps

Technical features

Manual release button to open the linkage when air pressure is removed during setup. **Pneumatic ports on both sides** of the cylinder.

Operating features

Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts


Size 40 mm

- **Cycle time for max opening angle**
< 0.8 s **NO flow valve required**
- **Clamping moment (at 5 bar / 72.5 psi)**
50 N m / 36,87 lb-ft
- **Holding moment**
75 N m / 55,31 lb-ft

The above data are meant for correct working conditions of the clamp with the same performance level during its life time. For applications which exceed the above data, please contact our sales representatives.

• Air consumption / Complete cycle (opening and closing)

REV. 00 - 17/06/2015

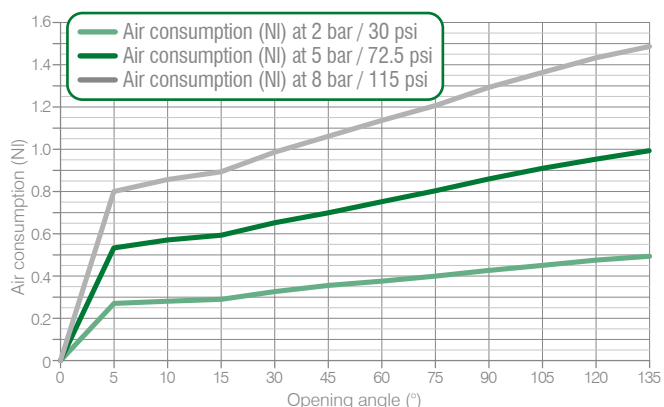

Ordering string

J-Series


J P 40 E G 1 2 A

J	VERSION	J = Retractable locating pin package with dual rod
P	OPERATION	P = pneumatic D = pneumatic with manual operation
40	SIZE	40 = Ø 40 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP
1	ARM MOVEMENT	1 = upper jaw
2	CLAMP ARM TYPE	2 = 2 pairs of knurled tips (not included in the scope of the supply)
A	ARM MATERIAL	A = aluminum S = steel



JP40E / Gripper clamp - Size 40 mm

WEIGHT 1.9 kg

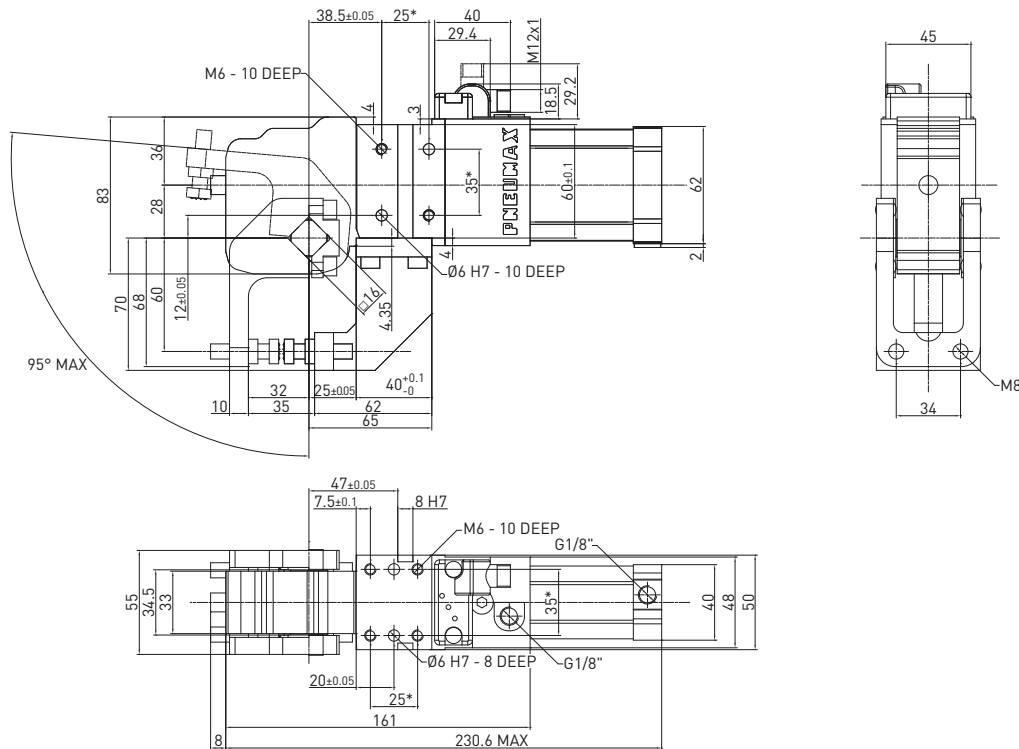


* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02
DIMENSIONAL
TOLERANCE FOR THREADED
HOLES: ± 0.1
REV. 00 31/03/2015

JD_40E / Gripper clamp - Size 40 mm - Manual operation

WEIGHT 2.2 kg

D1 handle included

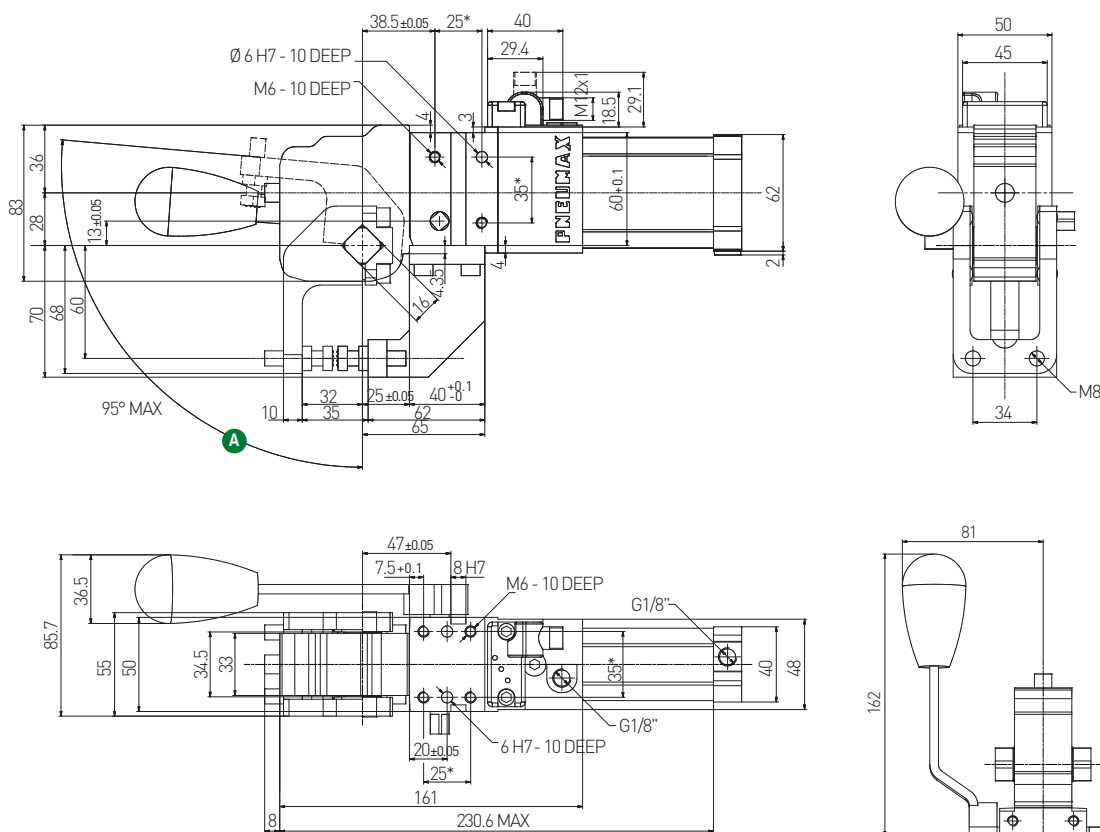

Handle swivel angle

Arm opening angle	A Handle swivel angle
0°	4.12°
15°	22.65°
30°	38.2°
45°	58.4°
60°	83.6°
75°	107.6°
90°	123.6°
105°	132.75°
120°	137.7°
135°	140°

* DIMENSIONAL
TOLERANCE FOR
DOWEL HOLES: ± 0.02
DIMENSIONAL
TOLERANCE FOR
THREADED HOLES: ± 0.1

D1 Version

D2 Version

REV. 00 - 17/06/2015

Handling

Quick installation guide



Caution

Any maintenance operation may only be carried out by qualified and authorized personnel. For any reason, do not reach into the pivoting range of the clamping arms, when the clamps are in operation. Disconnect and lock out pneumatic and electric supply lines before operating on or around clamps.

A worksheet for the right sizing of the clamp is available upon request. Visit our website for technical documents

<http://automotive.pneumax.it/>



Pressure operating range: from 2 to 8 bar/ from 30 to 115 psi.
Inline lubrication isn't required: if lubricated air is used, it is necessary to continue using lubricated air, as the oil in it may have removed the basic lubrication in the device.

The clamp is warranted for 3 mln cycles in correct operating conditions

No lubrication.

No preventive maintenance.

External cleaning with non-corrosive detergents is required: cleaning interval depends on the ambient conditions as well as on the frequency of use.



Clamp installation to the tool


The gripper clamp can be installed by one of its four mounting surfaces, using dowels and screws according to its datasheet. The tightening torques to be set are:

M6 10 N m / 7.37 lb-ft

Use the key support surfaces, where available.
Always use all the bores on the mounting pattern.


Clamping jaws mount

The sides of the brackets have two different heights. Assemble the brackets to the side of the clamping arm, so that the surfaces, where the side mark has been machined on, will match. Secure, at first, the screw on the mark side **1** by setting the tightening torques to 22 N m /16.22 lb-ft and leave no gap between the bracket and the jaws. Then, secure the other screw **2**: in this case, due to the different length of the sides of the brackets, a gap between the same and the clamping arm will be noticed. Always use locking washers. Please refer to the clamping arms' datasheet for possible clamping arm position and the respective max opening angle.

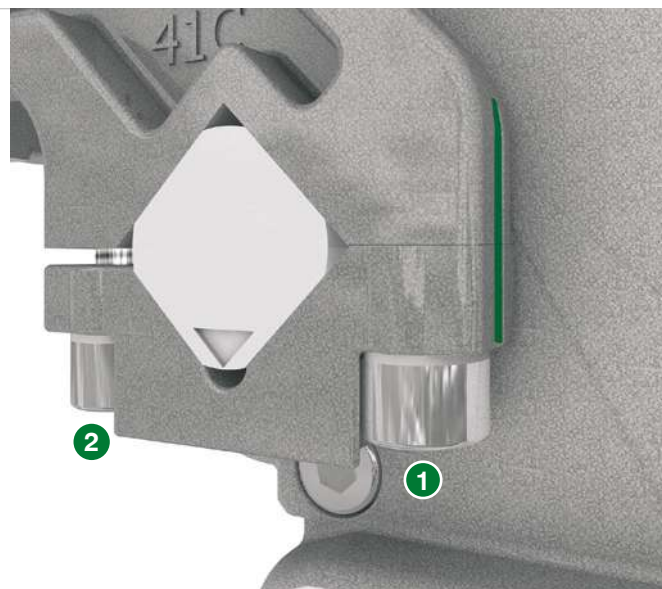

Opening angle adjustment

The jaws must be in the open position. Insert a 5 mm hexagonal flat Allen Wrench or a screw gun and adjust the opening position to the required opening angle.

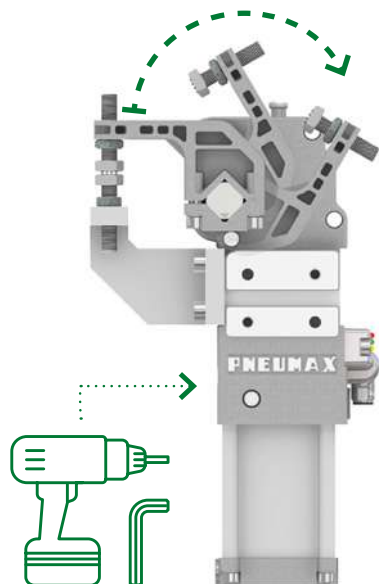


Visit our website
for a video of
the adjustment
procedure.
**No adjustment
of the sensor
is required.**

One access point
to opening angle
adjustment on
each side

Manual release button

To manually unlock the mechanism, hit the bolt with a rubber mallet. The linkage will automatically release itself from the over-centre position. To close the clamps during set-up operations, without air, use a screw gun or a flat Allen wrench to engage the adjustment means and adjust the clamp till 0° opening angle: the linkage will be toggle-locked as the manual release button is completely outside. The J40D and the JK40D series are equipped with a handlever, with whom the clamp can be closed and opened.

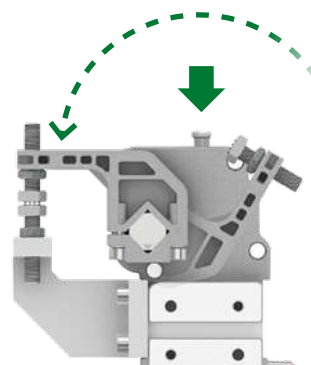


Adjustment Of the tips

Adjust the lower tips at a predetermined position and place the metal sheet to be held. For an optimal holding of the workpiece, adjust the tips on the mobile arm until contact with the workpiece is reached. Open and close the clamp. After a proper adjustment to get the required clamping force has been accomplished, secure the tip screws by tightening the bolts. Tips with different holding surfaces are available upon request.

Electronic sensor

ES001 is used for all clamps' sizes and series. Stepless adjustment of the connector: unscrew the tightening screw and set the connector in the required position, then secure the screw with 5 N m / 3.68 lb-ft.

To replace the sensor, remove the M5 screw and assemble a new one by tightening the same screw with 5 N m / 3.68 lb-ft.

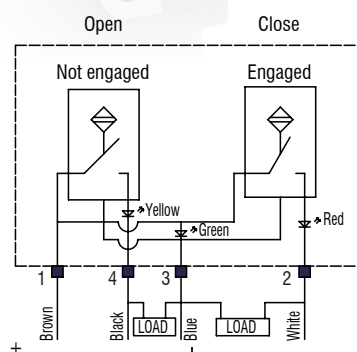

Simplified diagram (PNP)


Technical features	
Operating voltage	10-30 VDC
Voltage drop	≤ 2 V
Load current	≤ 100 mA
Current consumption	≤ 30 mA
Short-circuit protection	protected
Protection rating	IP68
Operating temperature	-0 °C +50 °C
Storage temperature	-25 °C +60 °C
Electromagnetic compatibility	EN IEC 60947-5-2
Power supply indication	green LED
Open position indication	yellow LED
Closed position indication	red LED
Digital output type	PNP

Pivoting

Robust and reliable pivot units to accurately position and/or rotate tooling or parts to work condition



Quick set-up



Robust conical roller bearings

PIVOTING

Easy set-up and quick installation time

The orientation of the ports can be easily achieved by untightening the tie rods.

No external limit stop required

Pneumatic cushioning of both end positions: fixed orifices and integrated cushioning provide for smooth operation in the closing and opening cycles.

Robust conical roller bearings

Drive shaft connections are all equipped with robust conical roller bearings for a **high load capacity and side load acceptance**.

All enclosed mechanism




to ensure a high protection degree against contaminants and years of service life **without maintenance** to minimize downtime associated with contamination.

Power pivots

P-Series

The P series can be mounted by its rear or front mount and can be used as a **DUMP** device. By mounting the pivot units by their lateral mounts, they can be used to **ROTATE** parts, tooling and clamps' assemblies.

- Remains locked even after loss of air pressure
- Front, rear and side mounting surfaces
- Four table mounting positions available
- 1 sensor for all sizes and opening angle with stepless adjustable connector
- Extra light products

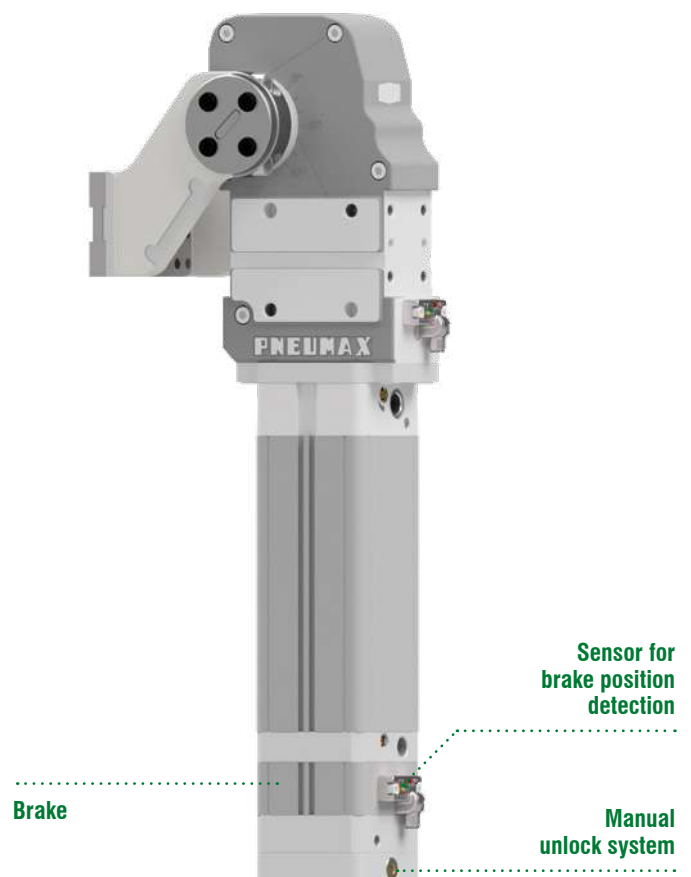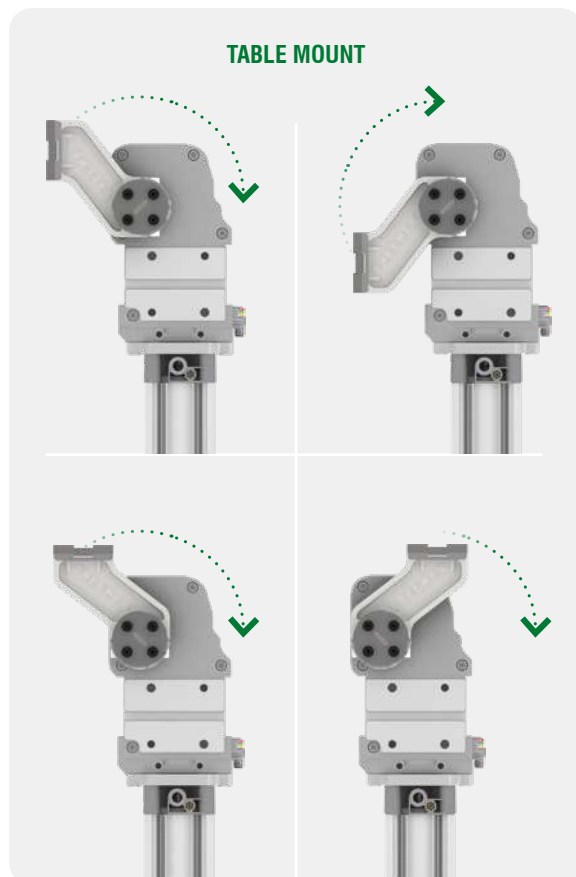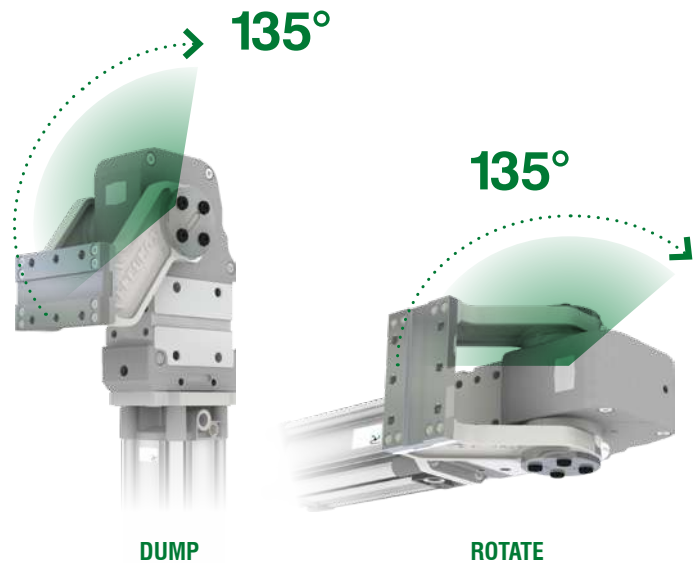


PIVOTING

P63-Series

Pneumax guarantees high reliability of all products though a 100% testing procedure made by the Automotive division Quality Department.

Conforming to standard



GLOBAL STANDARD COMPONENTS
NAAMS

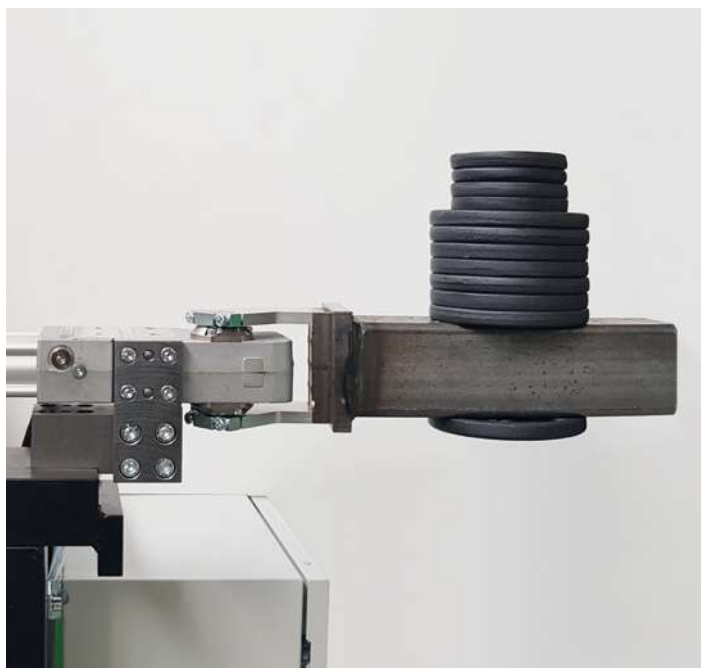

PIVOTING

Max swivel angle: 135°

The only fully adjustable opening angle from 0° to 135° in the market.

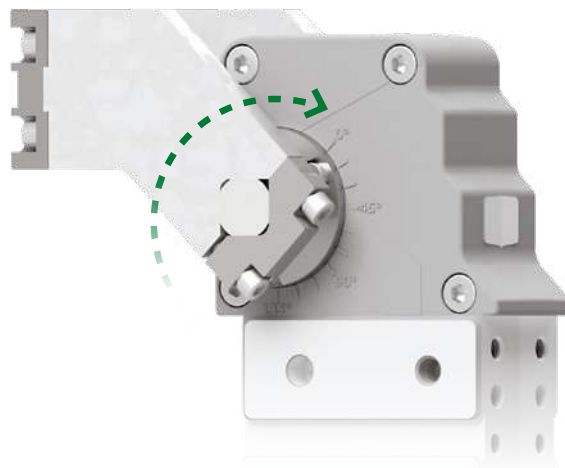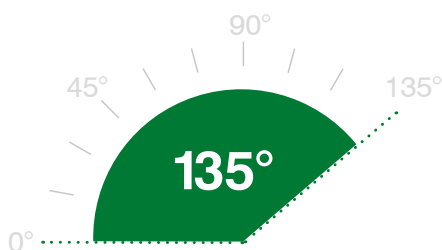

P-Series



Pivot units

Technical features

Manual release button to open the linkage when air pressure is removed during setup.

Operating features

Operating pressure from 2 to 8 bar / from 30 to 115 psi

Lubrication all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

• Max opening angle for table positions

	Pos. 1	Pos. 2	Pos. 3	Pos. 4
135°	✓	✗	✓	✗
120°	✓	✗	✓	✗
115°	✓	✓	✓	✗
90°	✓	✓	✓	✗
60°	✓	✓	✓	✓
45°	✓	✓	✓	✓


Any intermediate opening angle is available upon request

Size 63 mm

- **Admissible load moment**
16 N m / 10,32 lb-ft
- **Holding moment**
1.500 N m / 1.106,34 lb-ft

• Air consumption / Complete cycle (opening and closing)

REV. 00 - 17/06/2015

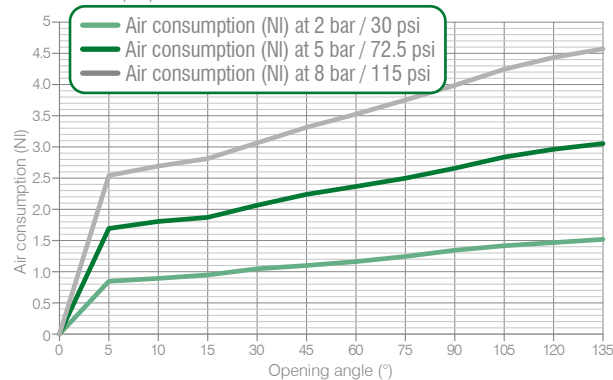


Size 100 mm

- **Admissible load moment**
130 N m / 95,88 lb-ft
- **Holding moment**
2.500 N m / 1.843,90 lb-ft

• Air consumption / Complete cycle (opening and closing)

REV. 00 - 15/05/2015

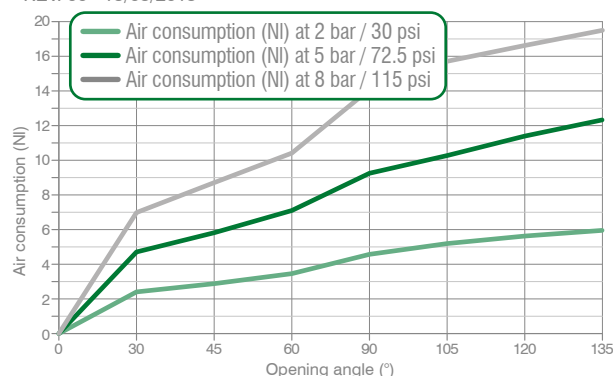


Size 80 mm

- **Admissible load moment**
70 N m / 51,62 lb-ft
- **Holding moment**
2.500 N m / 1.843,90 lb-ft

• Air consumption / Complete cycle (opening and closing)

REV. 00 - 15/05/2015

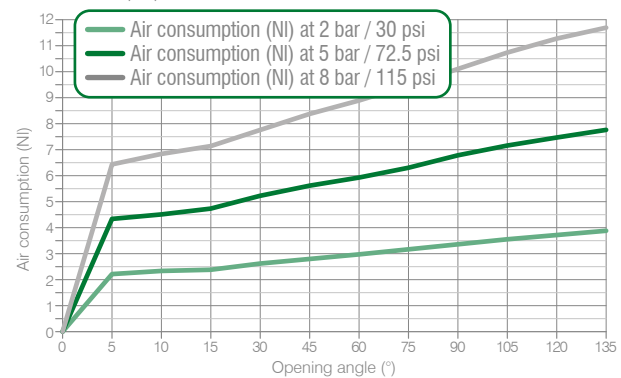


Size 125 mm

- **Admissible load moment**
180 N m / 132,76 lb-ft
- **Holding moment**
2.500 N m / 1.843,90 lb-ft

• Air consumption / Complete cycle (opening and closing)

REV. 00 - 15/05/2015

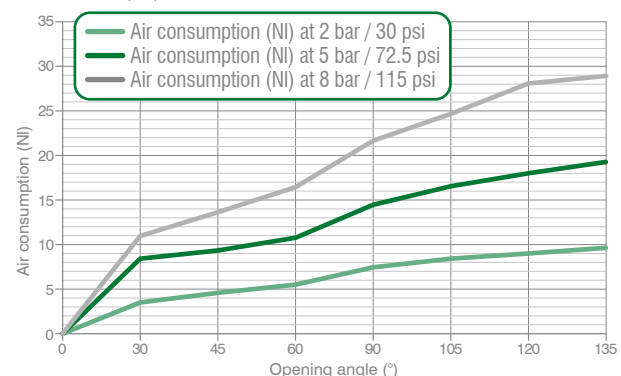

Ordering string
Size 63
P 63 E G 1 1 N ADJ

P	VERSION	P = Pivot unit
63	SIZE	63 = Ø 63 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
G	PORTS	G = G thread – BSPP
1	MOUNTING PATTERN	1 = International mount 2 = NAAMS Standard
1	TABLE MOUNT	1 =  2 =  3 =  4 =  Max op. angle 135° Max op. angle 112° Max op. angle 135° Max op. angle 70°
N	BRAKE SYSTEM	N = no brake
ADJ	OPENING ANGLE	ADJ = stepless opening angle from 0° to 135°



INTERNATIONAL
MOUNT 

GLOBAL STANDARD COMPONENTS
NAAMS 
Size 80, 100, 125
P 80 E 1 G 1 N 45 U

P	VERSION	P = Pivot unit
80	SIZE	80 = Ø 80 mm 100 = Ø 100 mm 125 = Ø 125 mm
E	SENSOR	E = electronic sensor with M12 swivel connector - PNP A = electronic sensor with M12 swivel connector - NPN N = no sensor B = electronic sensor with M8 swivel connector - PNP
1	SUPPLY PORTS POSITION	1 = on the left side from the sensor 2 = on the front side 3 = on the right side from the sensor 4 = on the sensor's side The supply ports position of the brake is the same as the cylinder's
G	PORTS	G = G thread – BSPP
1	TABLE MOUNT	1 =  2 =  3 =  4 = 
N	BRAKE SYSTEM	B = brake N = no brake S = sensor on the brake
45	OPENING ANGLE	45° 60° 90° 120° 135° Any intermediate opening angle is available upon request - Please see the charts for table position as well as for max. opening angle
U	UNLOCK MECHANISM FOR THE BRAKE	U = unlock mechanism (only for brake system: B,S)

P63EG1 / Pivot unit - International mount - Size 63 mm

WEIGHT 6.5 kg

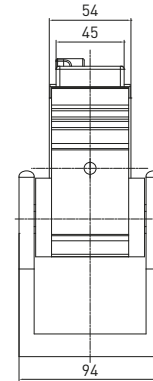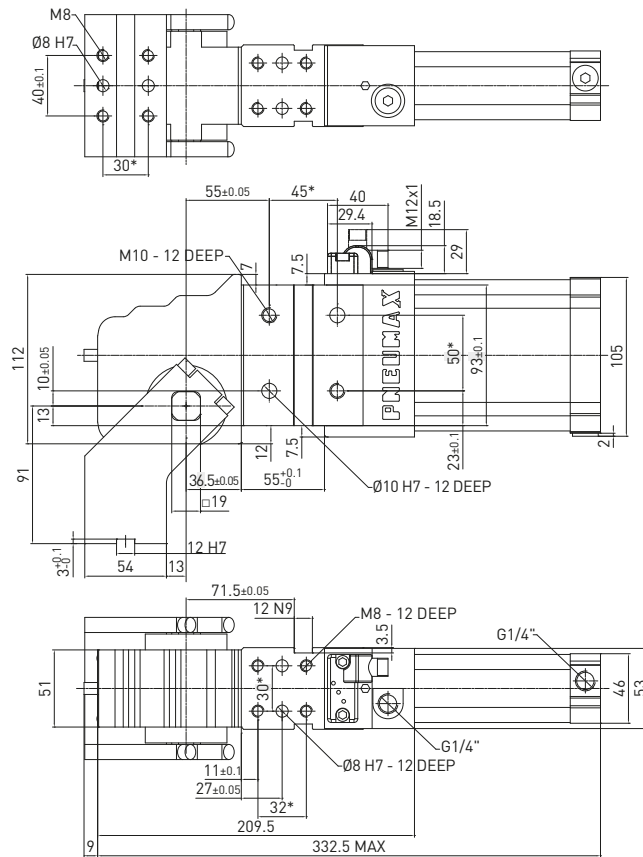



* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 02/08/2019

P63EG2 / Pivot unit - NAAMS Std - Size 63 mm

WEIGHT 6.5 kg

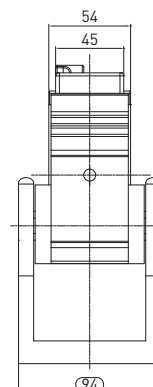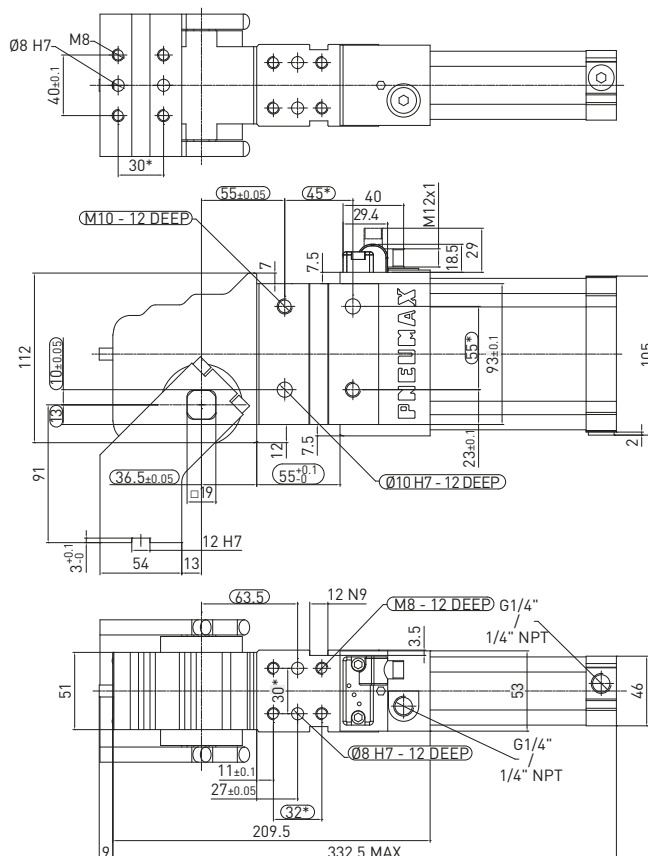

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 02/08/2019




P80_N_ / Pivot Unit - Size 80 mm

WEIGHT 15 kg

135° version

A dimension

opening angle	A (mm)
45°	382.5
60°	395
90°	420.5
120°	445
135°	453

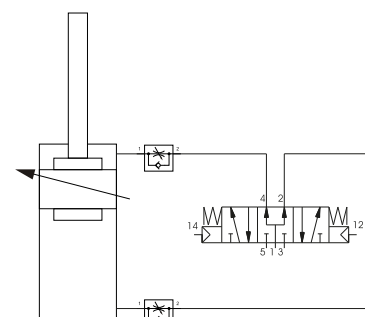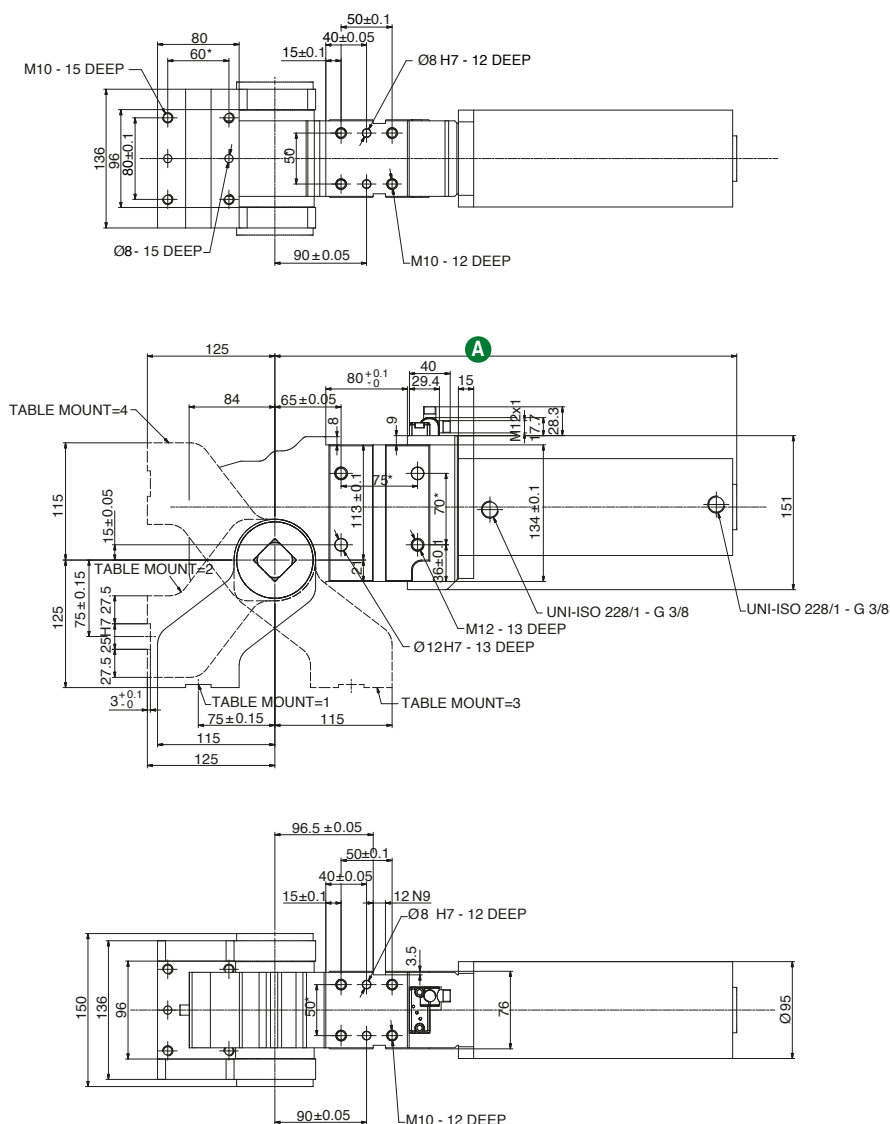

Not included in the scope of the supply


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 02 - 05/05/2021



P100__N__ / Pivot Unit - Size 100 mm

WEIGHT 15.8 kg
135° version

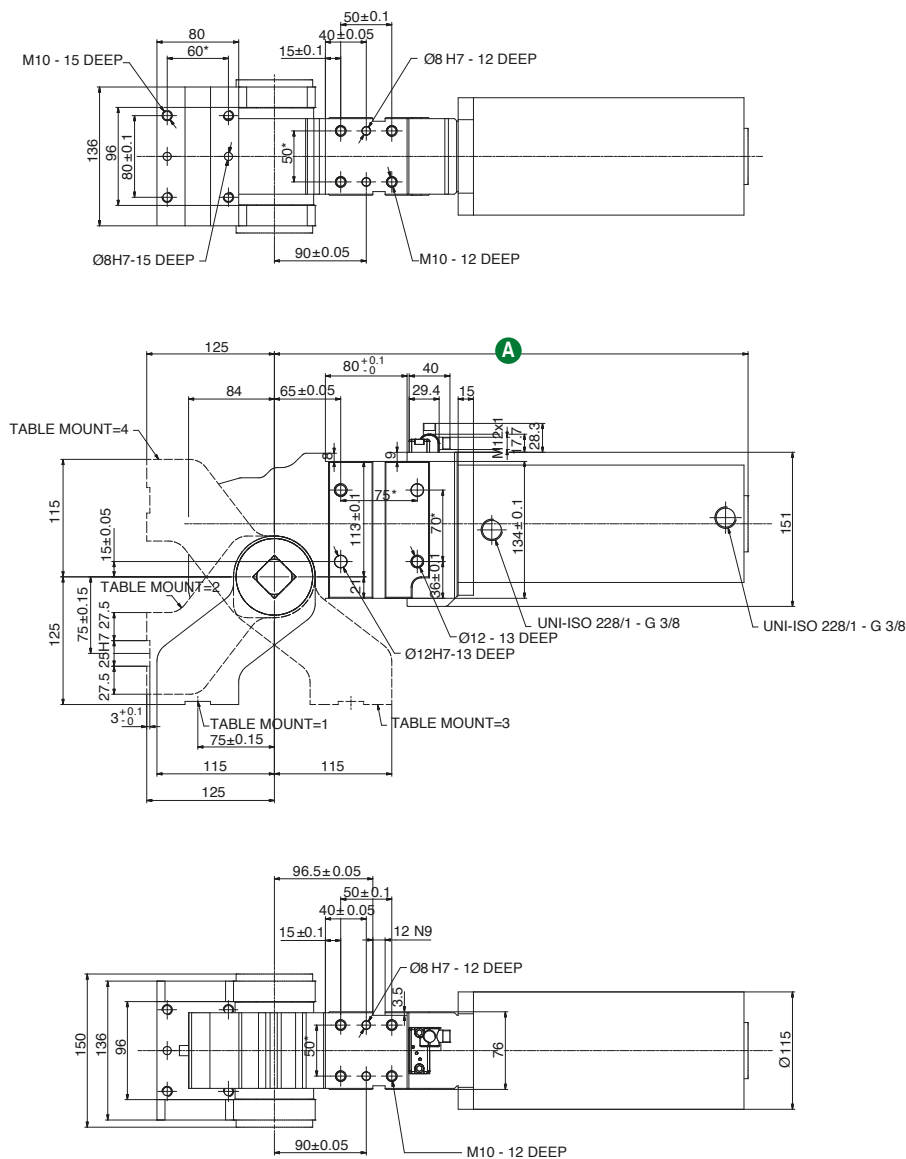

A dimension

opening angle	A (mm)
45°	393.5
60°	406
90°	431.5
120°	456
135°	464

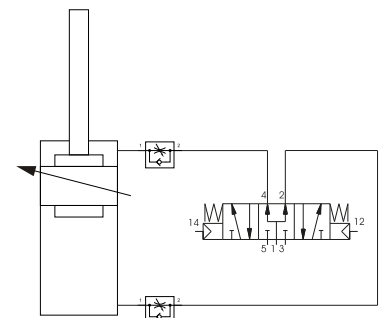

Not included in the scope of the supply

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 02 - 05/05/2021

P125 N / Pivot Unit - Size 125 mm



WEIGHT 18.5 kg

135° version

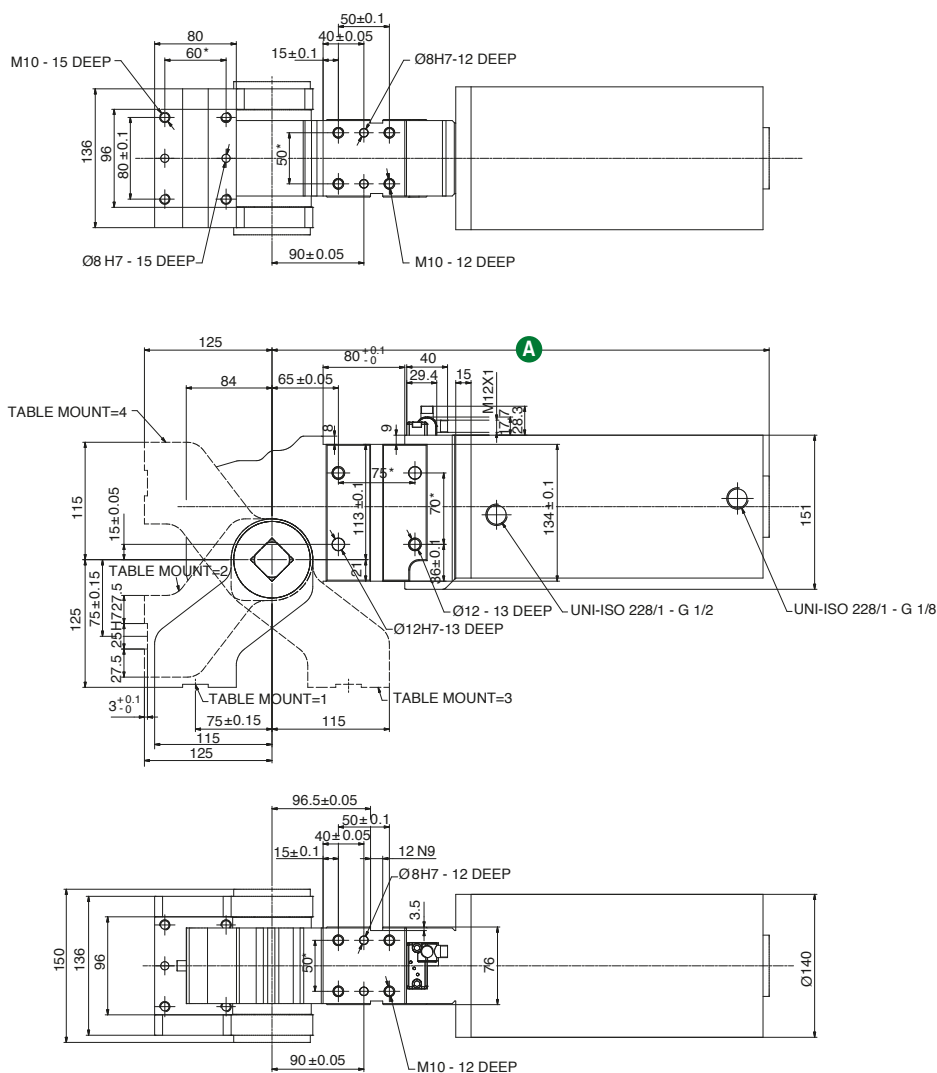

A dimension

opening angle	A (mm)
45°	416.5
60°	429
90°	454.5
120°	479
135°	487

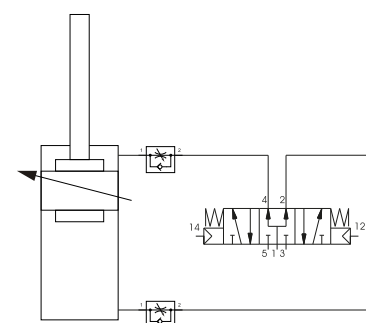

Not included in the scope of the supply


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 02 - 05/05/2021



P80E__B/S__ / Pivot Unit - Size 80 mm

WEIGHT 18.9 kg
135° version

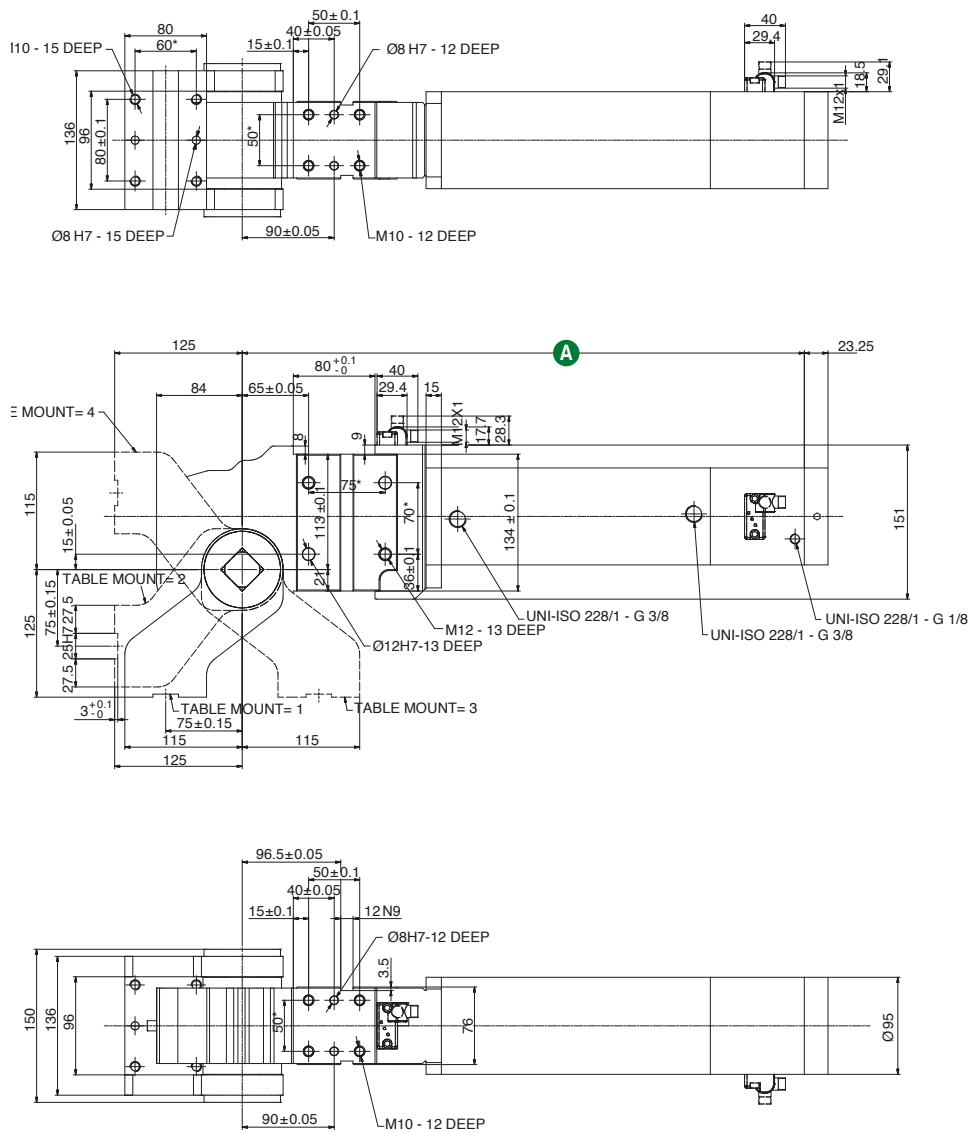

A dimension

opening angle	A (mm)
45°	480
60°	492
90°	518
120°	543
135°	551

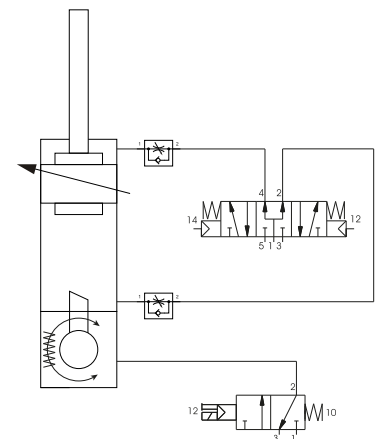

Not included in the scope of the supply

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02


DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 05/05/2021

P100E B/S / Pivot Unit - Size 100 mm





WEIGHT 20.5 kg

135° version

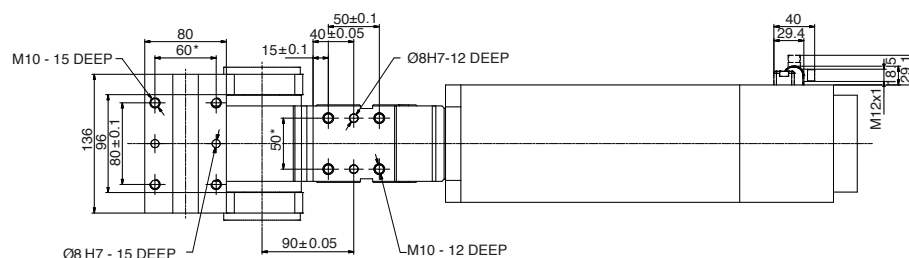

A dimension

opening angle	A (mm)
45°	486
60°	498
90°	524
120°	549
135°	557

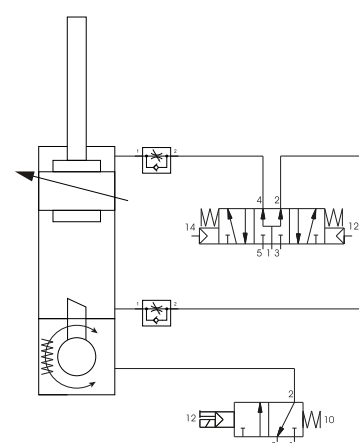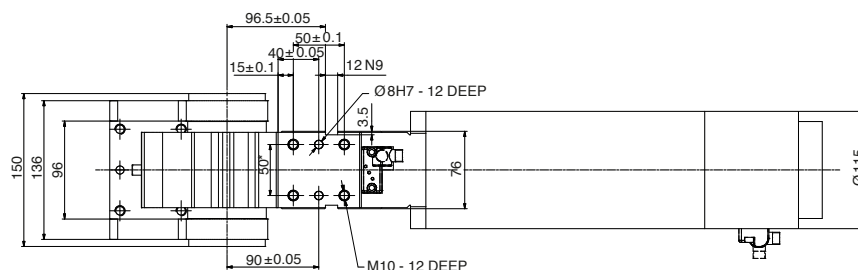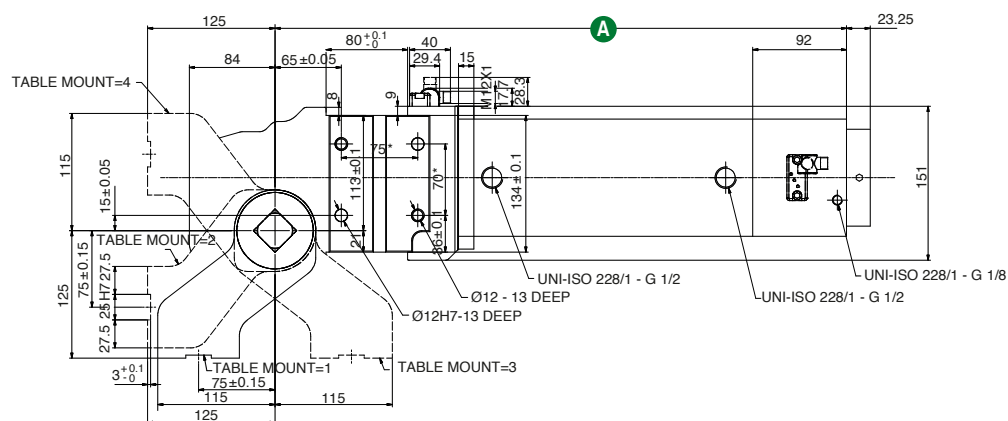

Not included in the scope of the supply


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 05/05/2021



P125E__B/S__ / Pivot Unit - Size 125 mm

WEIGHT 22.00 kg
135° version

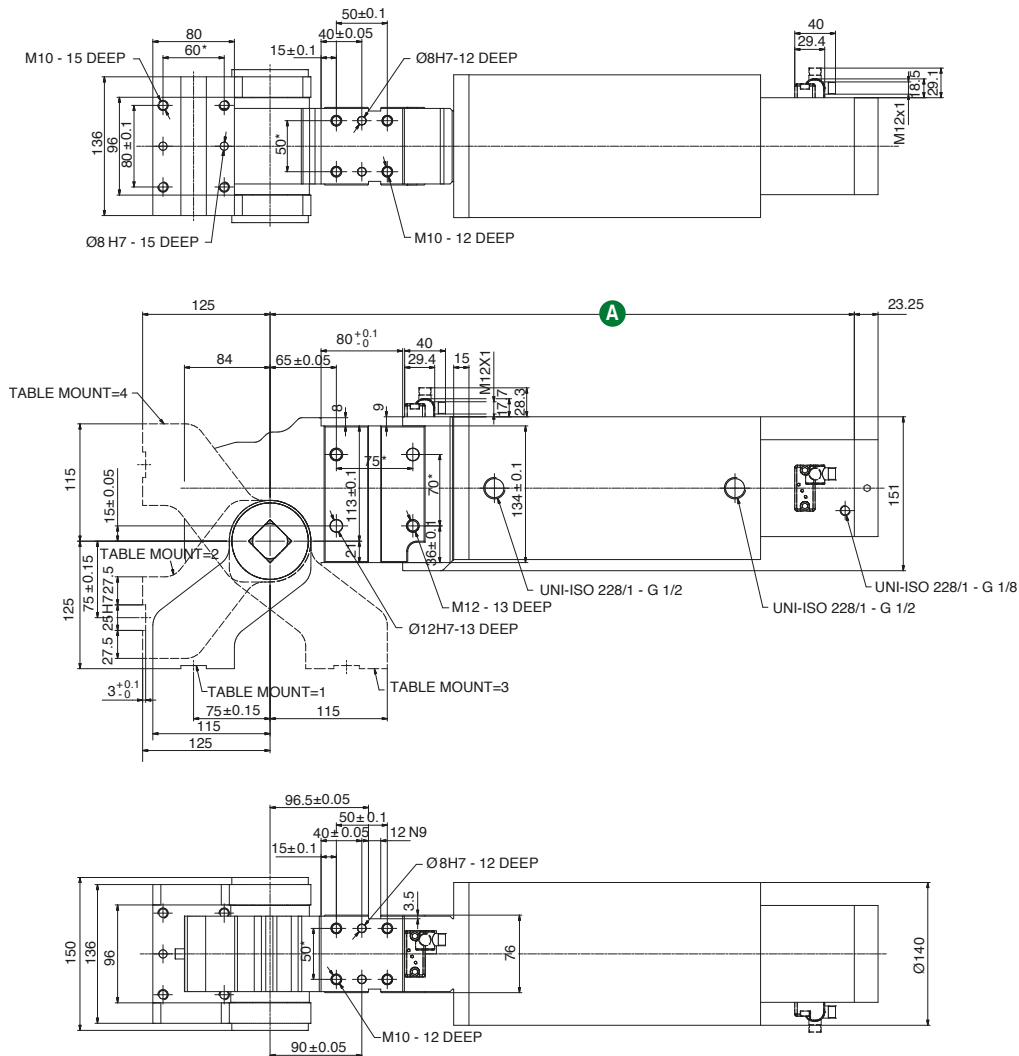

A dimension

opening angle	A (mm)
45°	524
60°	536
90°	562
120°	586
135°	595

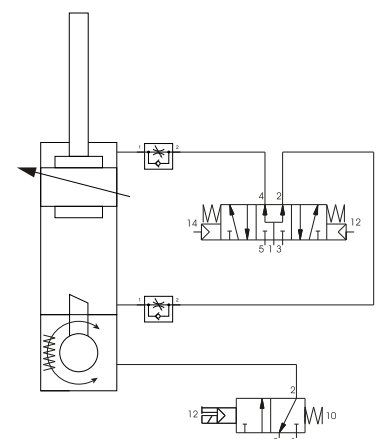

Not included in the scope of the supply

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 05/05/2021

PM-Series

INTERNATIONAL
MOUNT



Pivot units

Technical features

Manual release button to open the linkage when air pressure is removed during setup.

Operating features

Operating pressure	from 2 to 8 bar / from 30 to 115 psi
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Functional charts

• Max opening angle for table positions

	Pos. 1	Pos. 2	Pos. 3	Pos. 4
135°	✓	✗	✓	✗
120°	✓	✓	✓	✗
115°	✓	✓	✓	✗
90°	✓	✓	✓	✗
60°	✓	✓	✓	✓
45°	✓	✓	✓	✓


Any intermediate opening angle is available upon request

Size 80 mm

- **Admissible load moment**
70 N m / 51,62 lb·ft
- **Holding moment**
2.500 N m / 1.843,90 lb·ft

• Air consumption / Complete cycle (opening and closing)

REV. 00 - 15/05/2015

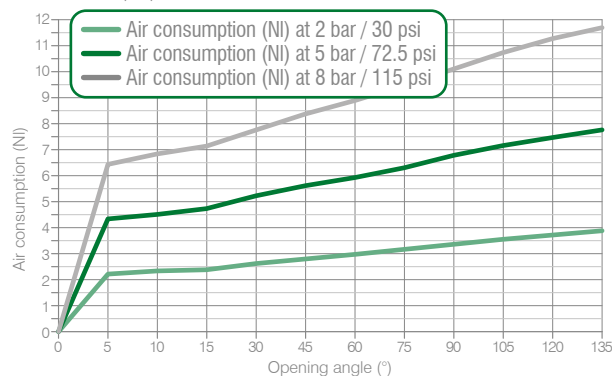


Size 100 mm

- **Admissible load moment**
130 N m / 95,88 lb·ft
- **Holding moment**
2.500 N m / 1.843,90 lb·ft

• Air consumption / Complete cycle (opening and closing)

REV. 00 - 15/05/2015

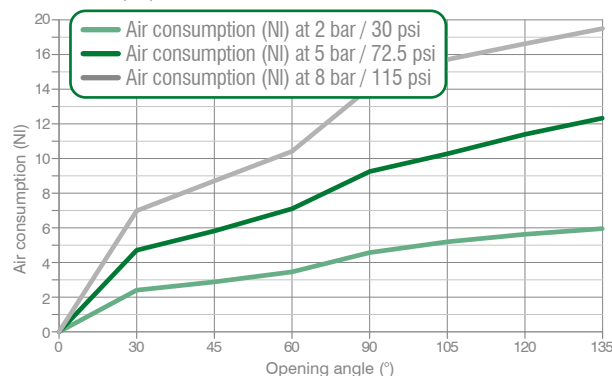


Size 125 mm

- **Admissible load moment**
180 N m / 132,76 lb·ft
- **Holding moment**
2.500 N m / 1.843,90 lb·ft

• Air consumption / Complete cycle (opening and closing)

REV. 00 - 15/05/2015

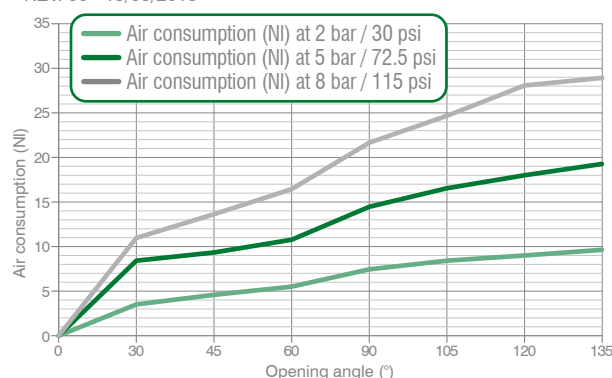

PM 80 E 1 G 1 N 45 U

PIVOTING

187






PM100E B/S U / Pivot Unit - Size 100 mm

WEIGHT 24.20 kg

135° version

A dimension

opening angle	A (mm)
45°	491
60°	503
90°	529
120°	554
135°	562

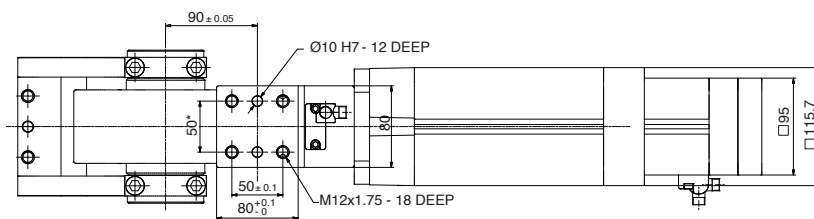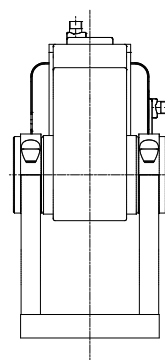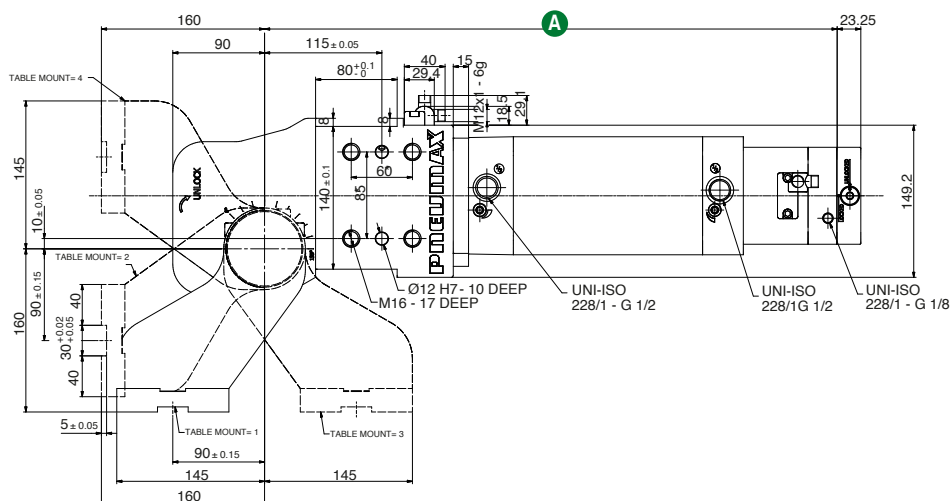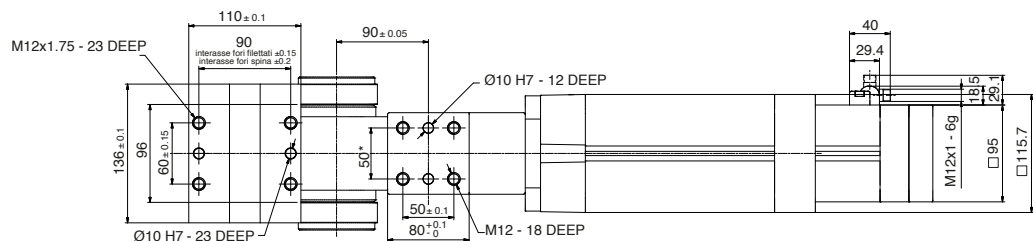

Not included in the scope of the supply

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1






REV. 00 - 09/12/2025

PM125E__B/S__U / Pivot Unit - Size 125 mm

WEIGHT 25 kg
135° version

A dimension

opening angle	A (mm)
45°	529
60°	541
90°	567
120°	591
135°	600

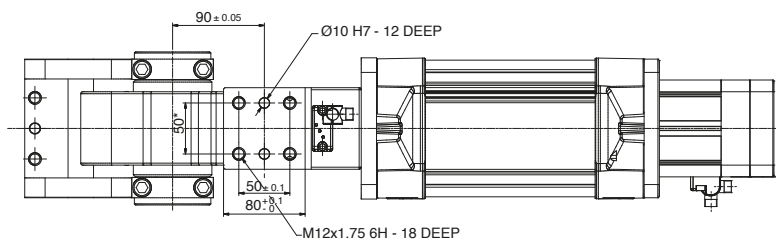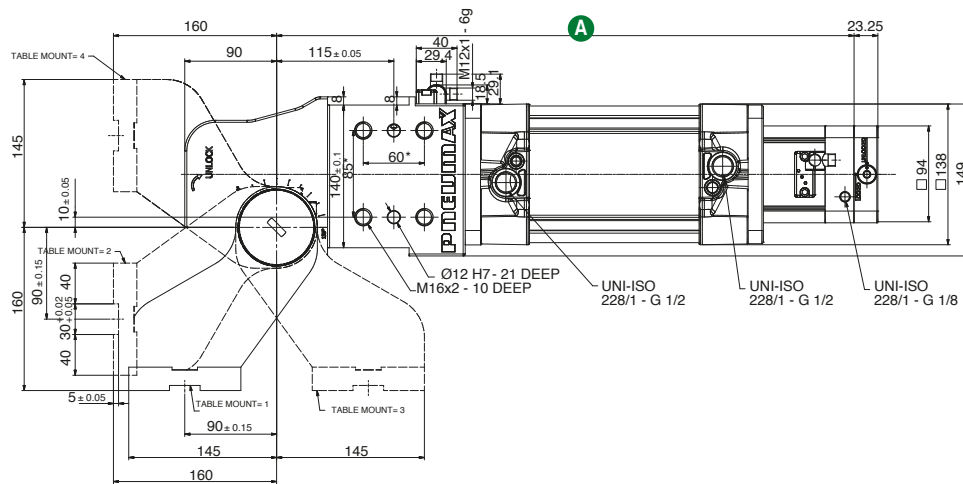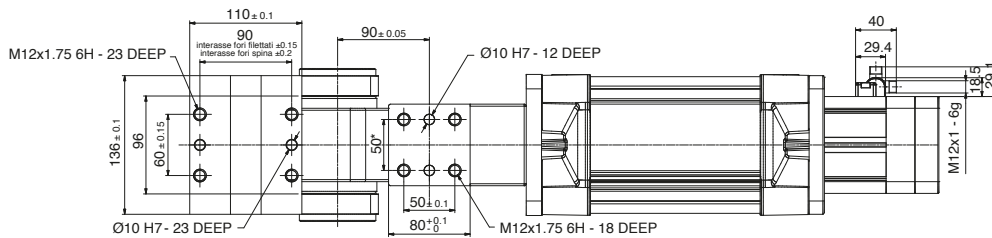

Not included in the scope of the supply

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV. 00 - 04/06/2025

Pivoting Quick installation guide

QIG_C_EN Rev.00 04.2022



Caution

Any maintenance operation may only be carried out by qualified and authorized personnel. For any reason, do not reach into the pivoting range of the units, when they are in operation. Disconnect and lock out pneumatic and electric supply lines before operating on or around power pivots.

Functional description

PNEUMAX power pivots are rotating units typically used in the field of sheet metal working. A pneumatic cylinder operates a toggle linkage and drives it to its closed or open position. A toggle mechanism, integrated in the power pivot's housings, guarantees the closed condition even in the absence of the actuation command.

An external actuating arm is connected to the shaft of the linkage. Power pivots are robust and reliable devices used in fixtures to accurately position and rotate workpieces: they are equipped with robust conical roller bearings with high-load capacity and side load acceptance. They can be mounted by their rear or front mounting surfaces and be used as dump devices, or they can be mounted by their side mounting surfaces and be used to rotate parts or assemblies. The open and closed positions of the actuating arm, also referred to as swivelling table or saddle arm, is detected by an inductive sensor through integrated sensor means in the linkage. Power pivots can be equipped with brake devices configured to stop the unit during its stroke in case of pressure loss.

Safety

Power pivots are designed and manufactured as components to be incorporated in more complex systems or toolings: they are not stand-alone or independent ready-to-be-used devices and for this reason they are not equipped with their own safety equipment.

Power pivots should not be operated before the complete safety control system of the tooling is activated and certified as conforming to all directives and related safety requirements.

All operations and any maintenance work on power pivots must be carried out exclusively by trained staff and by observing all conditions which guarantee the safety of the personnel, in a complete standstill of the whole system.

Handling

Make sure that the packaging is not damaged before unboxing the units; given its considerable weight, it is advisable to use a suitable lifting system and to guarantee that during its handling the load is stably balanced.

Power pivots installation to the tool

Power pivots can be installed by one of their mounting surfaces, using dowels and screws according to its datasheet. The tightening torques to be set are:

M5	5 N m / 3.68 lb·ft
M6	10 N m / 7.37 lb·ft
M8	25 N m / 18.43 lb·ft
M10	35 N m / 25.81 lb·ft
M12	50 N m / 36.87 lb·ft

Use the key support surfaces, where available.
Always use all the bores on the mounting pattern.

Operating conditions

Pressure operating range:

from 2 to 8 bar/ from 30 to 115 psi

Inline lubrication isn't required:


if lubricated air is used, it is necessary to continue using lubricated air, as the oil in it may have removed the basic lubrication in the device.

Electronic sensor

ES001 is used for all power pivots' sizes and for the detection of the brake condition (activated/ deactivated).
Adjustment of the connector: unscrew the tightening screw and set the connector in the required position, then secure the screw with 5 N m / 3.68 lb-ft.

Technical features

Operating voltage	10-30 VDC
Voltage drop	≤ 2 V
Load current	≤ 100 mA
Current consumption	≤ 30 mA
Short-circuit protection	protected
Protection rating	IP68
Operating temperature	-0 °C +50 °C
Storage temperature	-25 °C +60 °C
Electromagnetic compatibility	EN IEC 60947-5-2
Power supply indication	green LED
Open position indication	yellow LED
Closed position indication	red LED
Digital output type	PNP

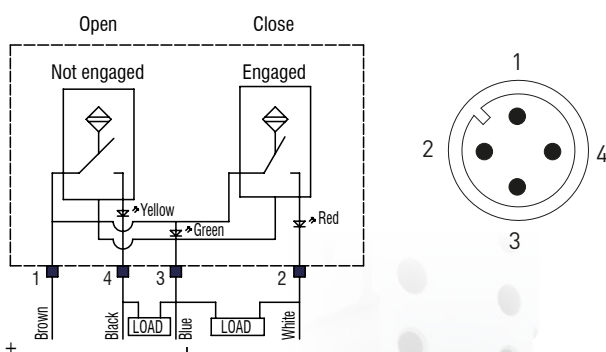


Simplified diagram (PNP)

To replace the sensor, remove the M5 screw and assemble a new one.




Pneumatic connection Recommended pneumatic scheme

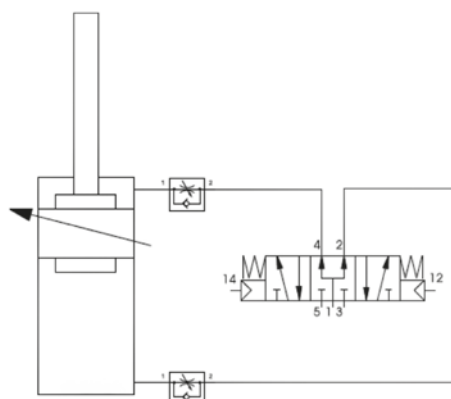

Power pivot without brake

Power pivot with brake system

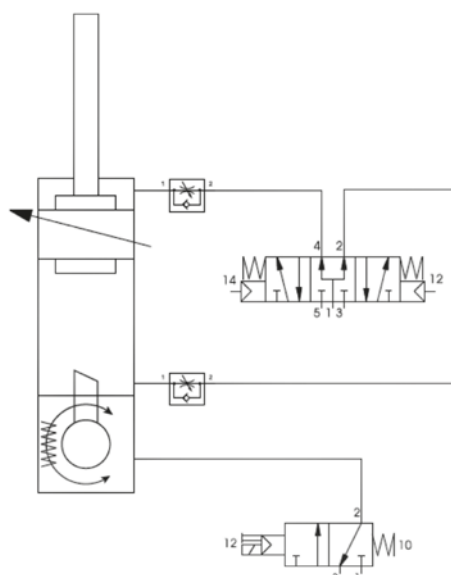

Manual release mechanism of the linkage

A manual override access to untoggle the linkage in case of emergency is provided for all power pivots. Before unlocking the mechanism, make sure not to reach into the swivel area of the saddle arm: once the linkage is untoggled, the arm can move quickly and abruptly in any direction.



WARNING

Make sure all safety requirements are met.
Such operations must be carried out by
qualified specialists.



Brake system


A patented brake system allows for a reliable braking in case of pressure drop. An original design guarantees a wide braking surface in extremely reduced radial dimensions. The brake system is designed for static conditions.

Operating pressure: **2.5 to 8 bar**

We suggest to carry out a yearly functional test of the brake system by simulating an emergency stop.



Patented

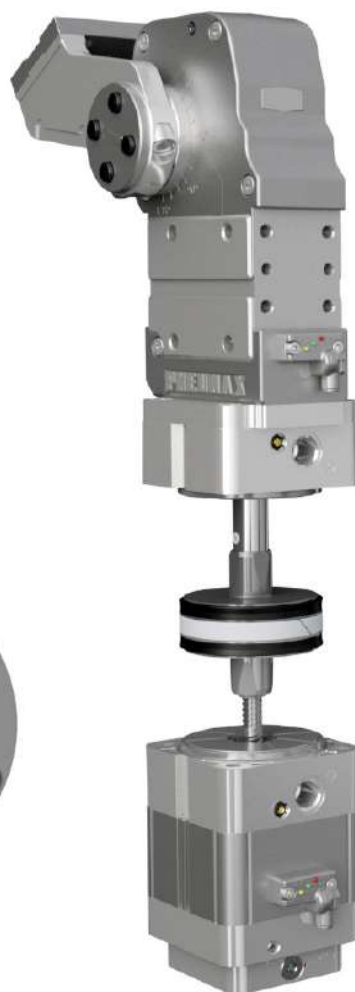

PIVOTING

Brake manual unlock device for emergency situations

Power pivots can be equipped with an unlock device to disengage the brake in case of emergency.

A built-in access for a 5 mm Allen wrench is integrated below the rear end cap. A clockwise movement of the Allen wrench will unlock the brake.


This procedure must be carried out exclusively by qualified specialists. Make sure to meet all related safety requirements and make sure that no operator reaches into the swivel area of the arm.



WARNING

Unlocking the brake will generate an immediate, abrupt movement of the load.

Once the Allen wrench is removed and air is supplied again to the unit, the brake will reset itself automatically.

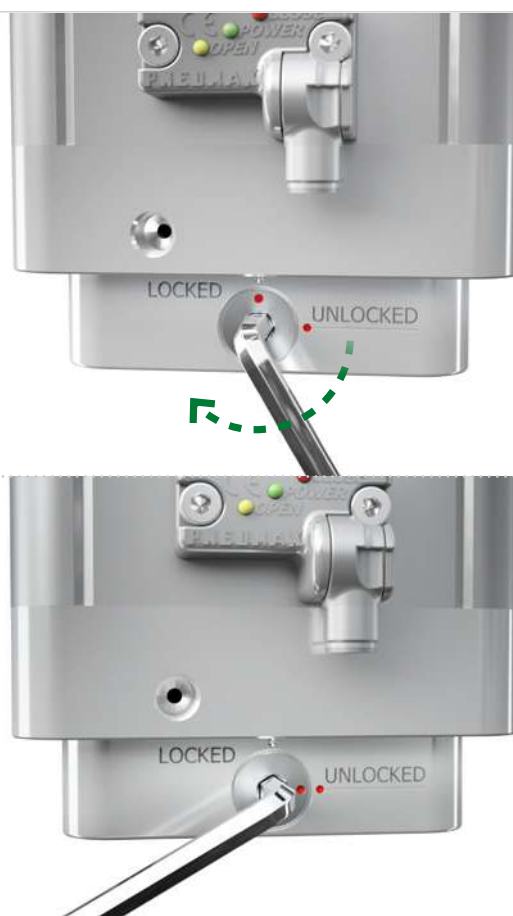

Orientation of the supply ports

The orientation of the supply ports on any power pivot can be easily and quickly modified, simply by untightening the 4 tie rods and rotating the cylinder block. Air must be disconnected during this procedure. Make sure to comply with the tightening torque specifications shown in the previous pages “power pivots installation to the tool”.



External stops, guides and shock absorbers

Using external stops, guides and shock absorbers is not a recommended procedure, as it may interfere with the correct functioning of the unit. All Pneumax power pivots are equipped with an integrated hard stop for the linkage, which guarantees an accurate and repeatable closed position. By using additional external stops or guides which prevent the power pivot to completely reach its end stroke, the correct functioning of the linkage will be jeopardized and it will invalidate any warranty of the unit.

In case external stops or guides are installed by the customers, they must not interfere with the correct functioning of the unit.

In case external guides are used, they must not generate any interference higher than 0,05 mm on their support.

In case the load conditions require shock absorbers to be installed, it is strongly recommended that they do not reach their end-stroke before the power pivot is toggle locked.

Stocking conditions

Warehouse temperature: **from -20°C to 50 °C**

Relative humidity: **10% to 90%**

Info

For any further information, do not hesitate to contact us at

automotive@pneumaxspa.com

Actuation

A wide range of pneumatic actuators, including piston rod cylinders, compact guided cylinders, cylinders with integrated brake with safety functions

Z-Series cylinders with brake




ISO 15552 cylinders



Compact guided cylinders



Special design product

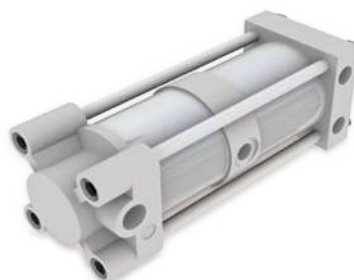

Z-Series

Cylinders with brake



**ISO 15552
compliance**

The pneumatic cylinders Z series (80-100-125 mm bore) comply with ISO 15552 standard. Z series cylinders are equipped with a brake, which, if fitted with an inductive sensor, can detect its operating condition.



Trapezoidal lead screw.

When the brake intervenes, the rotation of the lead screw is prevented

Brake device able of stopping the displacement of the rod in both directions thanks to its angularly symmetrical conformation

Electronic sensor with M12 swivel connector for the detection of the brake status

Manual unlock mechanism for brake deactivation with a built in automatic reset

Safety functions:

- Holding function
- Emergency braking function


These safety functions are triggered by the failure of the compressed air supply.

Concept design of the brake

The braking system is a patented mechanical device capable of operating in the absence of a pneumatic command and of holding the load statically in any position during the piston's stroke. The braking device includes a threaded shaft, with one end operatively coupled to the rod of the pneumatic cylinder, so that the rod's translation causes the threaded shaft to rotate. The second end of the shaft is provided with a head portion, designed to come into contact with the braking assembly, which consists of: a secondary piston, 8 springs, a cup-shaped element, a cage, rollers, and a braking pin (an illustrative image of the above-mentioned parts is shown alongside).



Patented

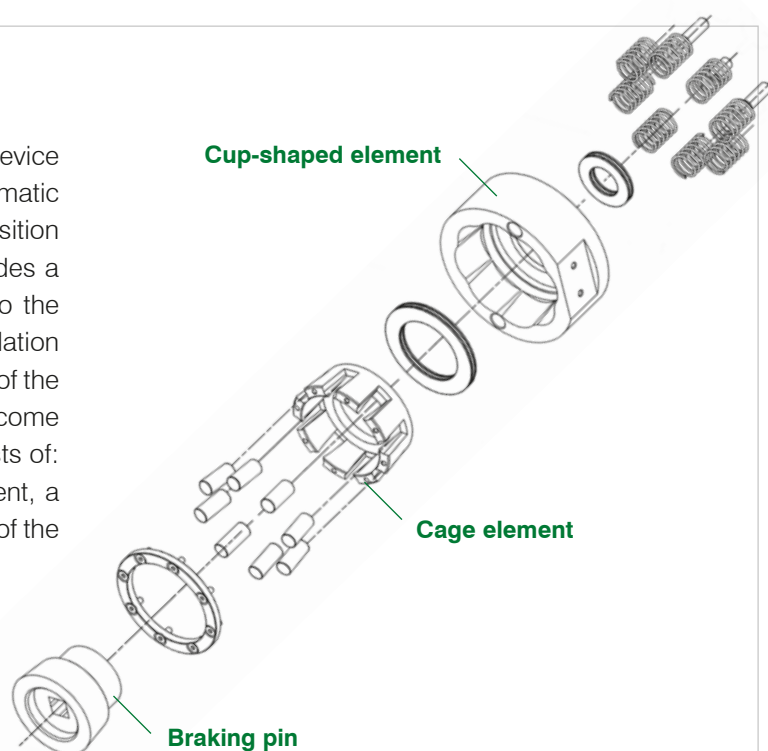

Functioning principle of the brake


The braking device is not able to rotate, it is locked against rotation but it is axially movable.

The cup-shaped element retains the rollers within an internal housing with a plurality of locking seats which are like recesses in the inner wall of the housing, and they have a conical surface. The cage-shaped element acts as a support structure.


The choice of using rollers aims at amplifying the contact surfaces during the braking. During the braking there are at least 3 points on each roller in touch with the groove of the cage. The receptacles are designed in radial direction with a tapering in radial direction, too, which prevents the rollers from coming off their locking seats.

The rollers are dragged into rotation with the cage by the head portion and for a very short angular stretch the rollers and the cage follow the rotation imparted thanks to the friction with the head portion until they reach a configuration in which the specific geometry of their seats in cooperation with the receptacles in the cage prevents any further displacement and they therefore engage in the other seat.

Now the rollers are in their maximum radial protrusion towards the axis of the cylinder, therefore in their maximum engagement and friction with the head portion. The limited radial and angular clearance of the rollers prevent locking situations of the head portion inside the braking seat.

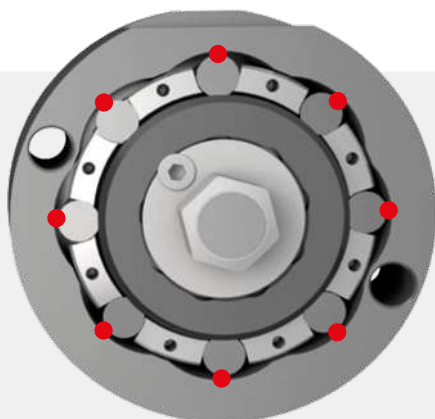

DEACTIVATED CONDITION

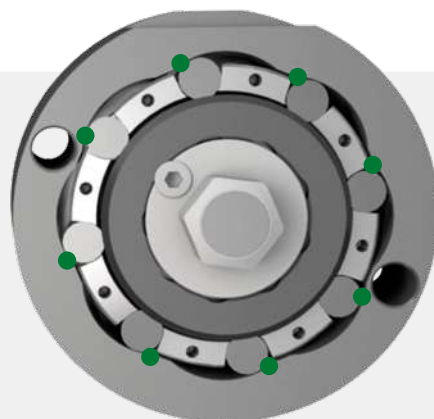

ACTIVATED CONDITION

Technical features

Operating features			
Operating pressure	2.5 – 8 [bar]		
Temperature			
Operating Temp.	From 0°C to 50°C		
Stock Temp.	From 0°C to 50°C		
Humidity	From 10% to 90%		
Max stroke			
Ø 80 mm	900 mm		
Ø 100 mm	700 mm		
Ø 125 mm	500 mm		
Theoretical force			
Advancing at 6 bar	Z80: 3014 N Z100: 4710 N Z125: 7359 N		
Retracting at 6 bar	Z80: 2720 N Z100: 4415 N Z125: 6877 N		
Advancing at 8 bar	Z80: 4019 N Z100: 6280 N Z125: 9812 N		
Retracting at 8 bar	Z80: 3626 N Z100: 5887 N Z125: 9169 N		
Pneumatic ports			
Pneumatic port for the brake	Z80/100/125: G 1/8		
Pneumatic port for the cylinder	Z80: G 3/8 Z100: G ½ Z125: G 1/2		
Static holding force of the brake	14700 N for all sizes		
Safety features			
Standard	UNI EN ISO 13849-1:2023		
MTTFd (target)	116.7 years (high)		
PL (without sensor)	till c		
Cat. (without sensor)	1		
PFH	9.78 x 10 ⁻⁷ h		
PL (with sensor)	till d		
Cat. (with sensor)	till 2		
ID	[SF1] without load	[SF1] with load	[SF2]
Description	Rod holding function Static stop		Emergency braking function Dynamic stop
Trigger	Pneumatic supply failure		
B10 _D	1.800.000 cycles	500.000 cycles	2000 cycles
MTTF _D ⁽¹⁾	180 years	100 years	100 years
PFH _D ⁽¹⁾	0.63 x 10 ⁻⁶ h ⁻¹	2.3 x 10 ⁻⁶ h ⁻¹	1.1 x 10 ⁻⁶ h ⁻¹
Hypothetical N _{op}	100.000 cycles/year	50.000 cycles/year	200 cycles/year

See the instructions manual for further information.

Material used	
Cylinder	
Rod bushings	Self-lubricating brass
Rod	Z80 D. 25 f7 - Z100 D. 25 f7 - Z125 D. 32 f7 - C43 Chr. 20-25 µm UNI 7845
Cylinder tube	Anodized aluminium alloy
Seals	NBR, rod seals
ORing	NBR
Pistons	Aluminum
End caps	Die-cast aluminum
Tie rods	Steel
Brake	
End cap	Aluminum
Springs	Steel
Cup-shaped element	Steel
Cage element	Steel
Rollers	Steel
Braking pin	Steel
Trapezoidal screw	AISI 316
Nut screw	PET
Piston	Aluminum
O-ring	NBR
Seals	NBR
Tie rods / Screws	Steel
Manual override	
Unlock plate	Anodized aluminum
Locking pin	Chromed steel
Unlock shaft	Steel
Piston	Steel
O-ring	NBR
Screws	Steel


Electrical features of the ES001 sensor



Technical features

Operating voltage	10-30 VDC
Voltage drop	≤ 2 V
Load current	≤ 100 mA
Current consumption	≤ 30 mA
Short-circuit protection	protected
Protection rating	IP68
Operating temperature	-0 °C +50 °C
Storage temperature	-25 °C +60 °C
Electromagnetic compatibility	EN IEC 60947-5-2
Weld field immunity	> 100 mT
Power supply indication	green LED
Open position indication	yellow LED
Closed position indication	red LED
Digital output type	PNP

Pressure-Stroke

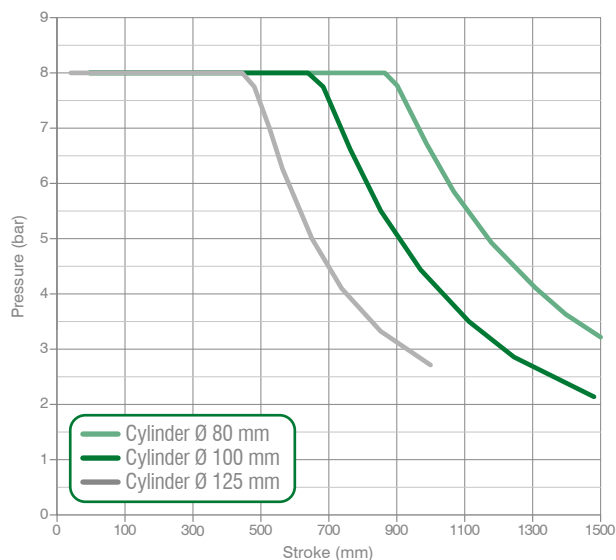


Cushioning

This series is equipped with end of stroke cushioning which can be adjusted by the operator.






Pneumatic circuit

Valves not included in the scope of the supply

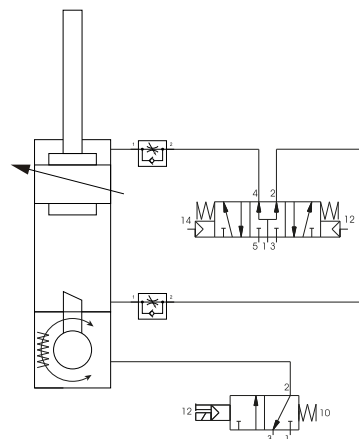


ES001 / Electronic sensor with M12 swivel connector - PNP

REV. 00 - 31/03/2015

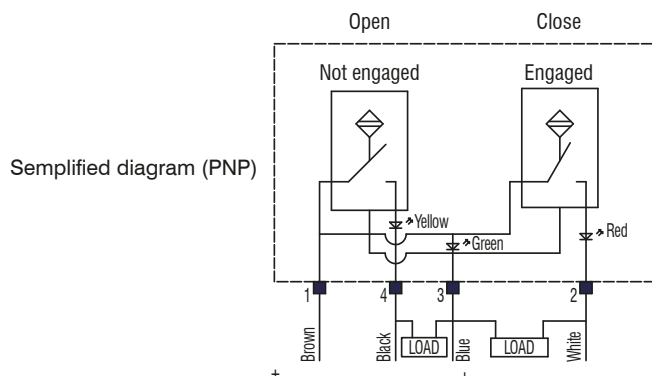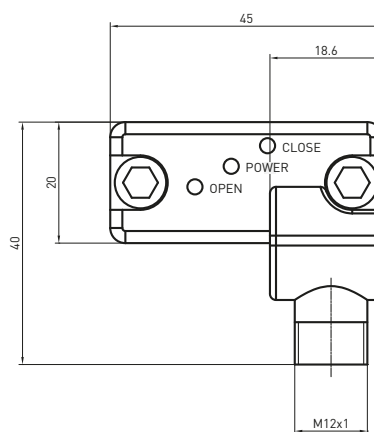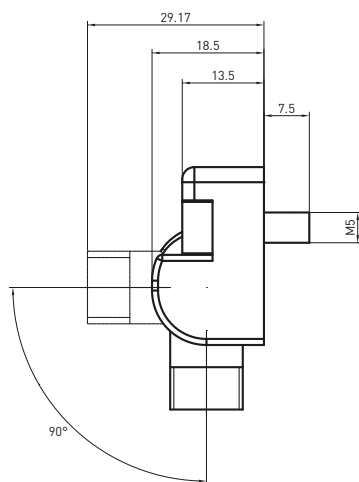

Z-Series

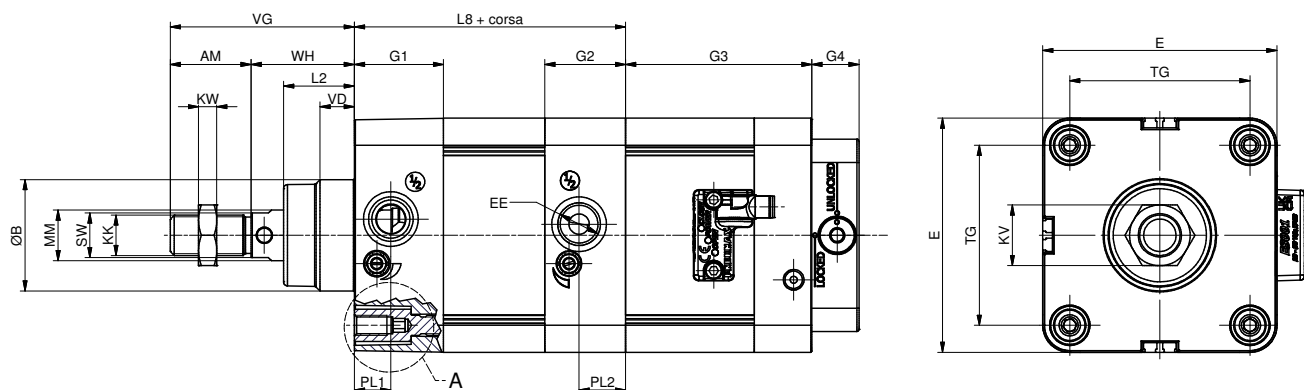

BORE	Ø 80	Ø 100	Ø 125
AM	40	40	54
B (d11)	45	55	60
BG	16	16	21
E	95.5	115.7	138
EE	G 3/8"	G 1/2"	G 1/2"
G1	40	44	48
G2	40	40	48
G3	92	92	104
G4	23.25	23.25	23.25
KK	20x1.5	20x1.5	27x2
KV	30	30	41
KW	9	9	12
L2	32	35	45
L8	128	134	160
MM	25	25	32
PL1	16	18	25
PL2	25	23	25
SW	22	22	27
RT	M10	M10	M12
TG	72	89	110
VD	15.5	17	6.5
VG	86	91	119
WH	46	51	65
Weight stroke Ø (Kg)	6.2	7.3	9.6
[g] every 10 mm	94	112	123

Ordering string

Size 80, 100, 125

Z 080 _ B U 03F 0 F

Z

SERIES

Z = 1390 cylinder series, chromed rod

080

SIZE

080 = Ø 80 mm
100 = Ø 100 mm
125 = Ø 125 mm

_

STROKE

Ex. 0050, 0100, 0150...

B

BRAKE SYSTEM

B = with brake
S = with brake, with sensor on the brake and M12 swivel connector

U

UNLOCK MECHANISM

U = manual unlock mechanism of the brake

03F

MOUNTING



03F = steel flange
051F = foot mount
20F = rear female mount
21F = rear male mount
25F = rear male swivel mount
29F = rear female compact mount

Please get in touch with our sales network for the availability of additional accessories

0

ORIENTATION should only be indicated if it is relevant for the type of mounting

0 = 0° parallel to the pneumatic ports
90 = 90° perpendicular to the pneumatic ports

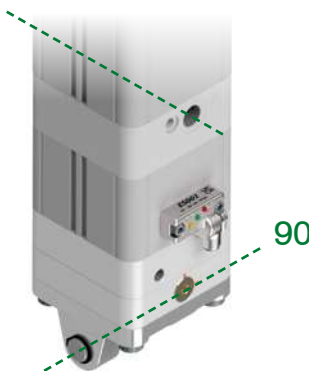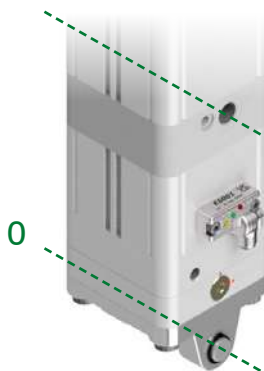

F

INSTALLATION position of the mounting


F = front mounting
R = rear mounting

The position of the brake pneumatic ports, the manual release, and the sensor is on the same side as the position of the cylinder pneumatic ports.



ENSURE THE ROD'S ANTI-ROTATION TO GUARANTEE BRAKE FUNCTIONALITY

Z-Series accessories

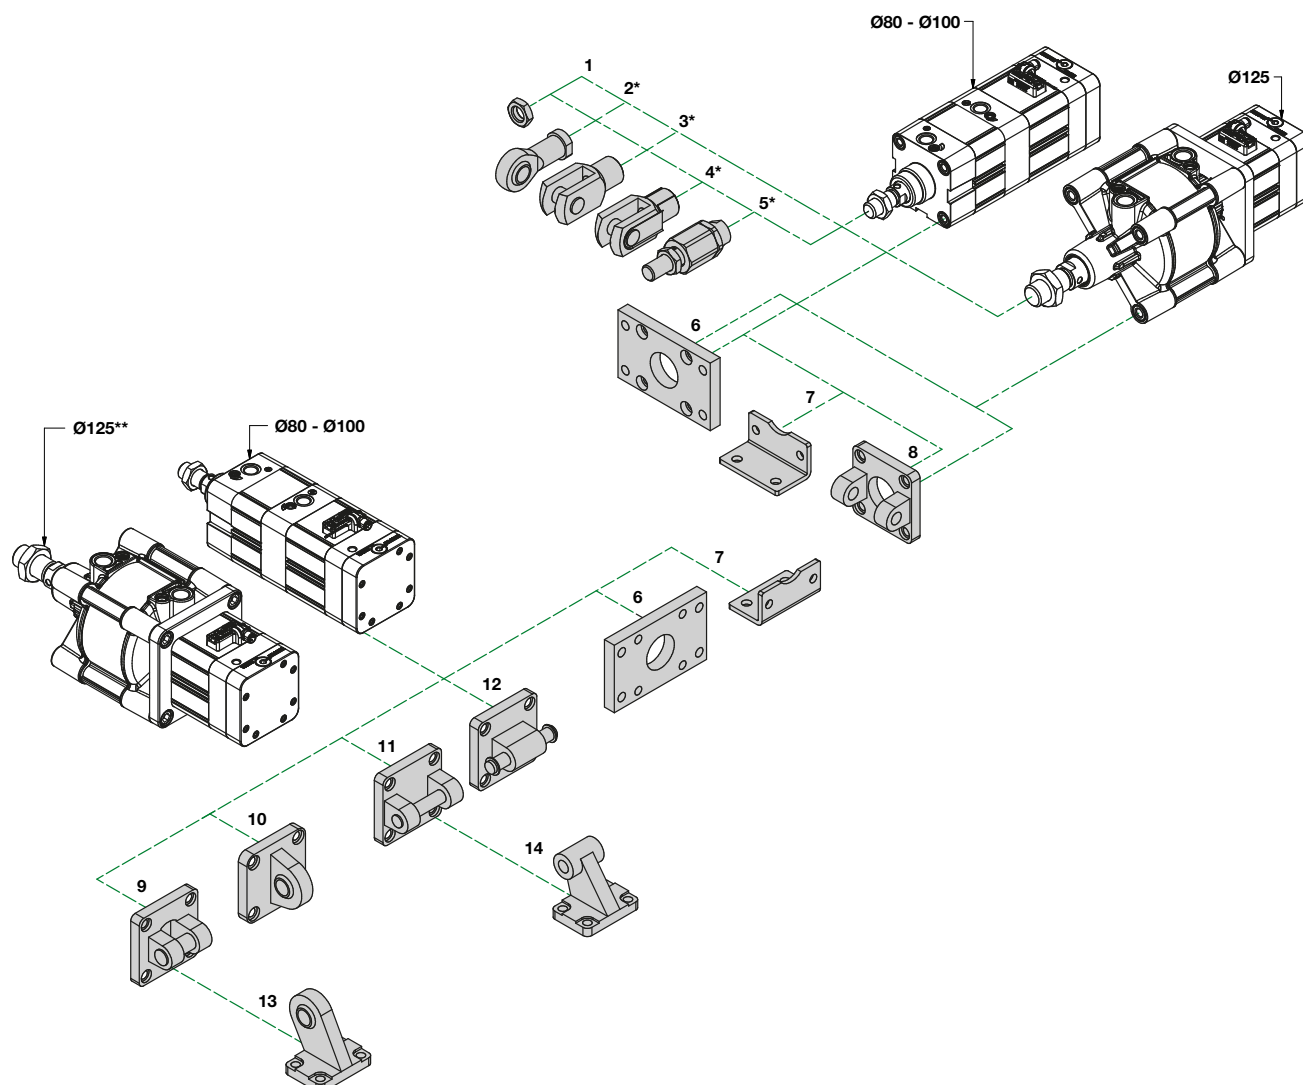

Pos.	Description	Ø80 Steel	Ø100 Steel	Ø125 Steel
1	Rod nut	1320.80.18F	1320.100.18F	1320.125.18F
2	Ball joint	1320.80.32F	1320.100.32F	1320.125.32F
3	Fork	1320.80.13F	1320.100.13F	1320.125.13F
4	Fork with clips	1320.80.13/1F	1320.100.13/1F	-
5	Self-aligning joint	1320.80.33F	1320.100.33F	-
6	Flanges (MF1 - MF2)	03F	03F	03F (only front mounting)
7	Bracket (MS1)	051F	051F	-
8	Front clevis	1320.80.19F	1320.100.19F	1320.125.19F
9	Rear female compact clevis (AB6)	29F	29F	-
10	Rear male clevis with joint (MP6)	25F	25F	-
11	Rear female clevis (MP2)	20F	20F	-
12	Rear male clevis (MP4)	21F	21F	-
13	Counter-clevis	1320.80.28F	1320.100.28F	-
14	Counter-clevis with joint	1320.80.24F	1320.100.24F	-


* drill during installation to ensure anti-rotation.

** the Ø125 mm version is available on request. Contact the Technical Department for more information.




FOR DYNAMIC STOP APPLICATIONS, ONLY THE MF1-MF2 FLANGE FRONT MOUNTING IS PERMITTED

1320.Ø.18F / Rod nut

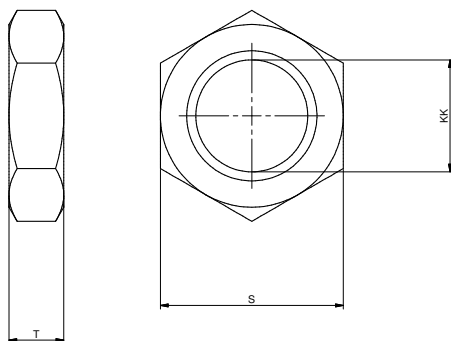


Dimension	Ø80	Ø100	Ø125
S	30	30	41
T	9	9	12
KK	M20X1.5	M20X1.5	M27X2
Weight [g]	40	40	100

1320.Ø.32F / Ball joint

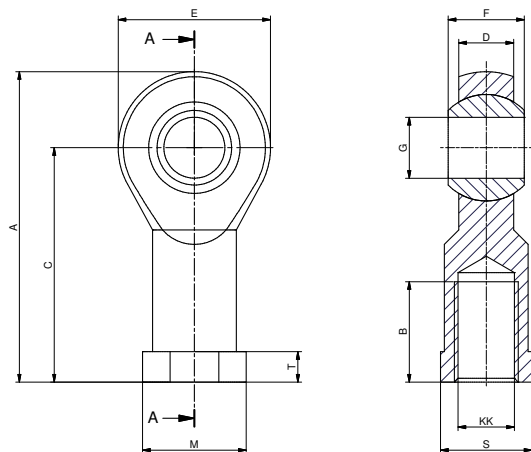


Dimension	Ø80	Ø100	Ø125
A	102	102	145
B	33	33	51
C	77	77	110
D (-0.1)	18	18	25
E	50	50	70
F	25	25	37
G (H7)	20	20	30
KK	M20X1.5	M20X1.5	M27X2
M	34	34	50
S	30	30	41
T	10	10	15
Weight [g]	410	410	1200

1320.Ø.13F / Fork

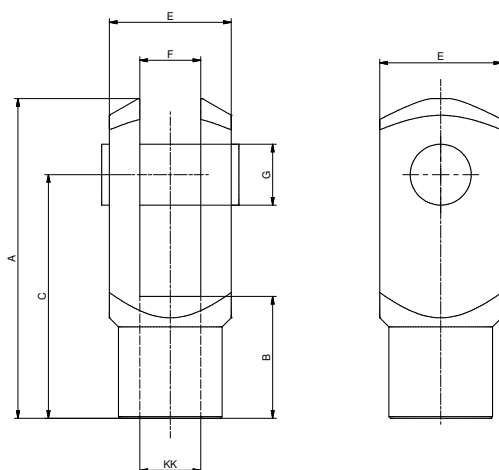


Dimension	Ø80	Ø100	Ø125
A	105	105	148
B	40	40	56
C	80	80	110
E	40	40	55
F (B12)	20	20	30
G	20	20	30
KK	M20X1.5	M20X1.5	M27X2
Weight [g]	680	680	2500

1320.Ø.13/1F / Fork with clips

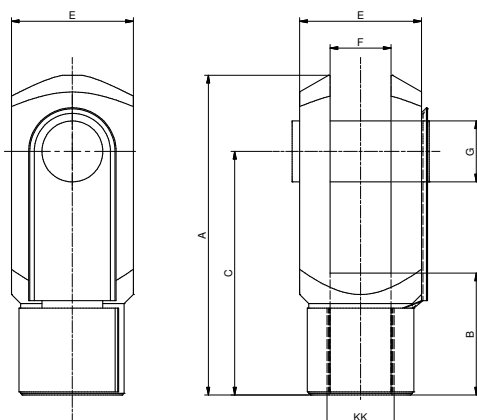


Dimension	Ø80	Ø100
A	105	105
B	40	40
C	80	80
E	40	40
F (B12)	20	20
G	20	20
KK	M20X1.5	M20X1.5
Weight [g]	680	680

1320.Ø.33F / Self-aligning joint

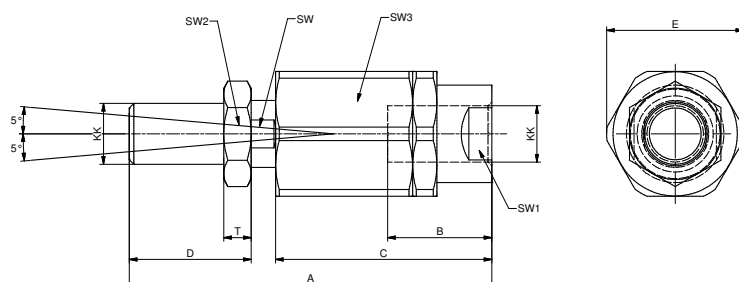


Dimension	Ø80	Ø100
A	119	119
B	40	40
C	71	71
D	40	40
E	45	45
KK	M20X1.5	M20X1.5
SW	20	20
SW1	27	27
SW2	30	30
SW3	41	41
T	9	9
Weight [g]	700	700

1320.Ø.19F / Front clevis

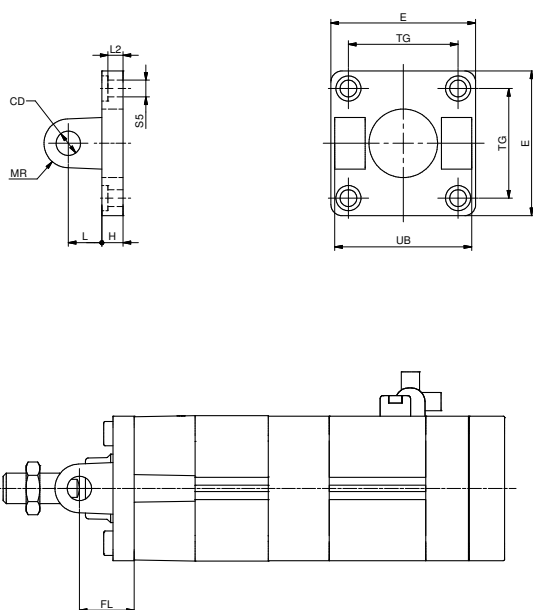

Dimension	Ø80	Ø100	Ø125
CD (H9)	16	20	25
E	95	115	140
FL (+/- 0.2)	36	41	50
H	14	16	20
L	22	25	30
MR	16	20	25
TG	72	89	110
UB (h14)	90	110	130
L2 (+/- 0.5)	10	10	10
S5 (H13)	11	11	14
Weight [g]	1010	1710	3360


1320.Ø.28F / Counterclevis

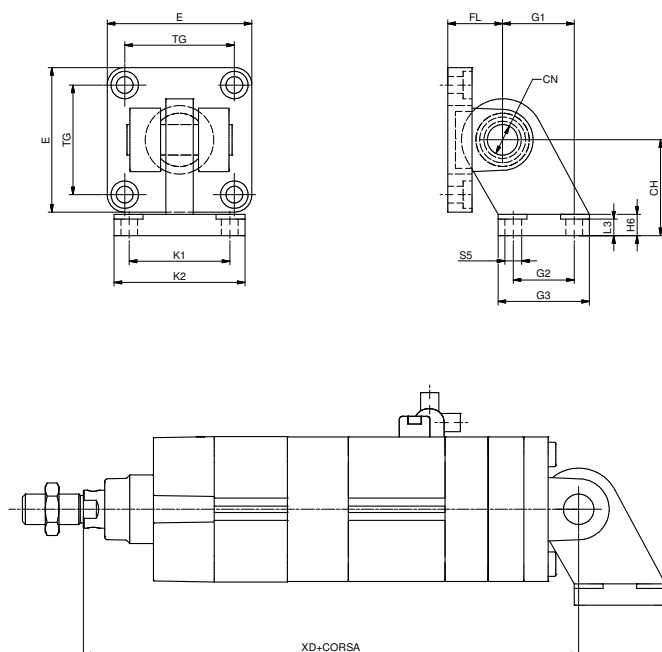

Dimension	Ø80	Ø100
CH (JS 15)	63	71
CN	20	20
E	95	115
FL (JS 15)	36	41
G1 (JS 15)	47	55
G2 (JS 14)	40	50
G3	60	70
H6	14	15
K1 (JS 14)	66	76
K2	86	96
L3 (+0.5/-0)	11.5	12.5
S5	11	11
TG	72	89
XD	325.25	341.25
Weight [g]	2100	3580


The Ø125 mm version is available on request.
Contact the Technical Department for more information.

1320.Ø.24F / Counterclevis with joint

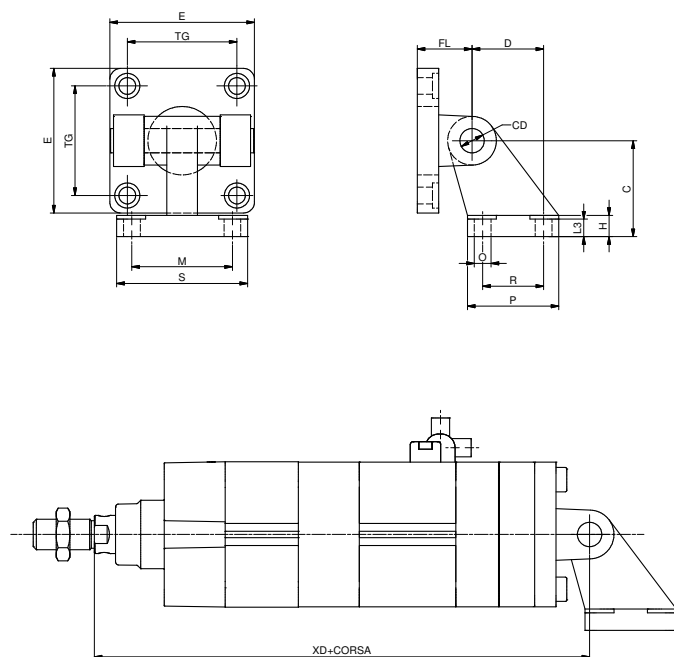

Dimension	Ø80	Ø100
E	95	115
TG	72	89
FL	36	41
D (JS14)	47	55
CD	16	20
C (JS15)	63	71
H	14	15
L3	11.5	12.5
R (JS14)	40	50
P	60	70
O (H13)	11	11
S	86	96
M (JS14)	66	76
XD	325.25	341.25
Weight [g]	2100	3500

051F / Bracket (MS1)

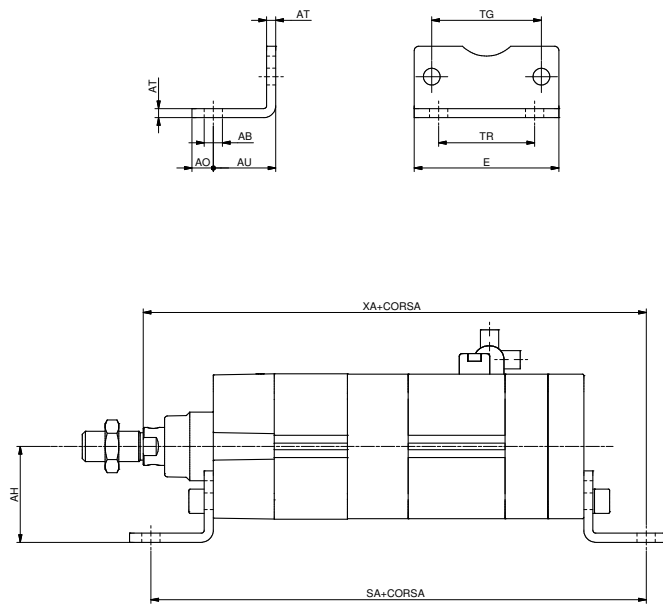


Dimension	Ø80	Ø100
AB (H 14)	12	14
AH (JS 15)	63	71
AU (+/- 0.2)	41	41
AO (+/- 0.2)	14	16
E	95	115
AT	6	6
SA	325.25	331.25
TG	72	89
TR (JS 14)	63	75
XA	330.25	341.25
Weight [g]	380	452

The Ø125 mm version is available on request.
Contact the Technical Department for more information.


03F / Flanges (MF1 - MF2)




**FOR DYNAMIC STOP
APPLICATIONS, THIS MOUNTING
IS ALLOWED WHEN INSTALLED
ON THE FRONT SIDE**

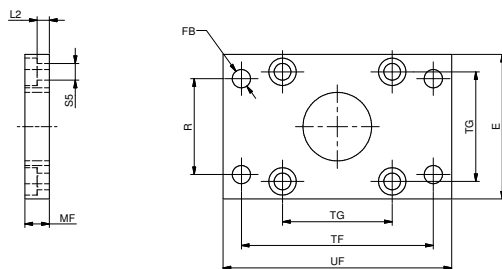

Front
mounting

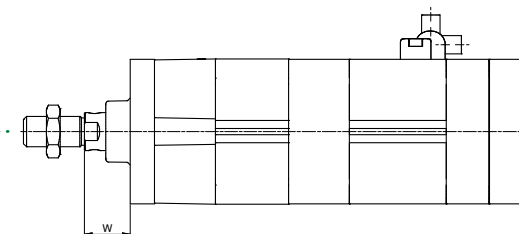


Rear
mounting

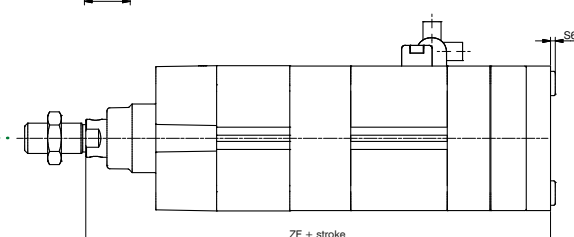

Dimension	Ø80	Ø100
E	95	115
FB (H 13)	12	14
MF (JS 14)	16	16
R (JS 14)	63	75
TF (JS 14)	126	150
TG	72	89
UF	150	170
ZF	305.25	316.25
W	30	35
L2	9	9
S5	11	11
S6	4	4
Weight [g]	1430	1990


29F / Rear female compact clevis

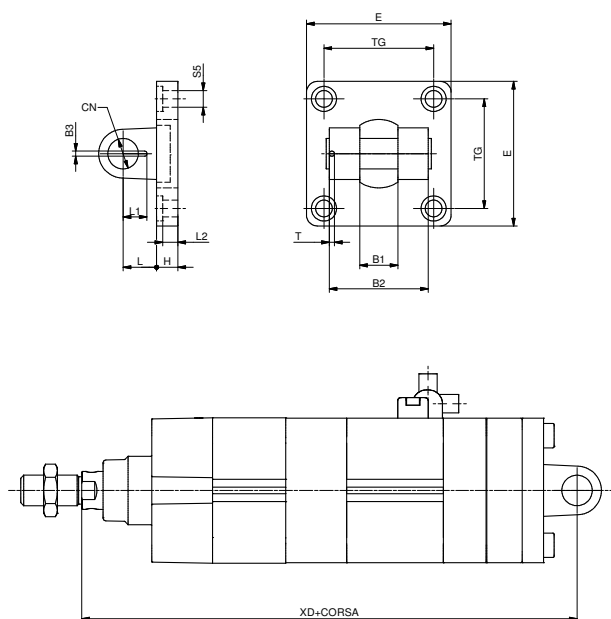

Dimension	Ø80	Ø100
B1 (H 14)	25	25
B2 (d 12)	65	75
B3 (+0.2/-0)	4.3	6.3
CN	20	20
E	95	115
H	14	16
L	22	25
L1	16	16
L2 (+/-0.5)	10	10
S5	11	11
T	4	4
TG	72	89
XD	325.25	341.25
Weight [g]	1110	2100

The Ø125 mm version is available on request.
Contact the Technical Department for more information.


25F / Rear male clevis with joint

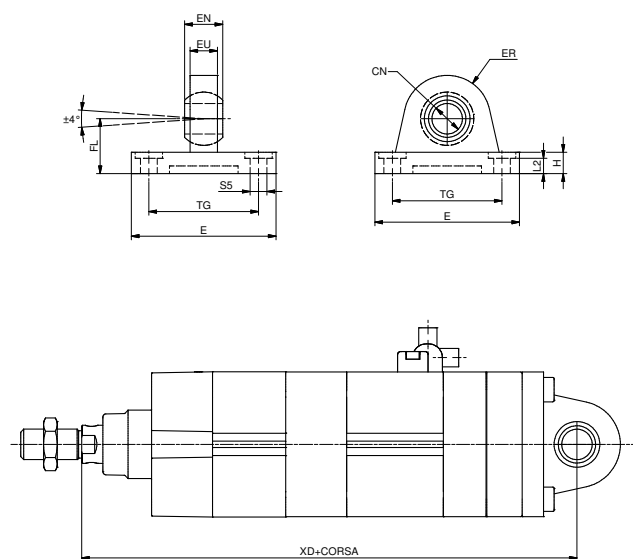

Dimension	Ø80	Ø100
CN (H 7)	20	20
E	95	115
EN (-0.1)	25	25
ER	27	30
EU	18	18
FL (JS 15)	36	41
H	14	16
L2 (+/-0.5)	10	10
S5	11	11
TG	72	89
XD	325.25	341.25
Weight [g]	1350	2400

The Ø125 mm version is available on request.
Contact the Technical Department for more information.


20F / Rear female clevis (MP2)

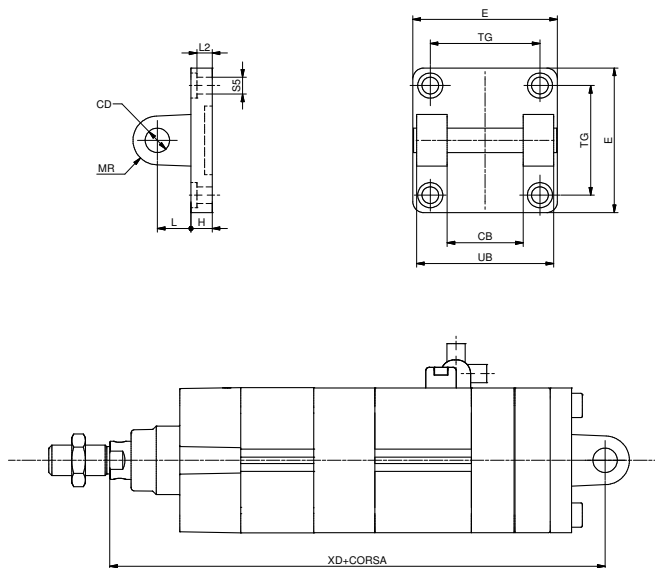

Dimension	Ø80	Ø100
CB (H 14)	50	60
CD	16	20
E	95	115
H	14	16
L	22	25
MR	16	20
TG	72	89
UB (h14)	90	110
XD	325.25	341.25
L2 (+/- 0.5)	10	10
S5	11	11
Weight [g]	1160	2000

The Ø125 mm version is available on request.
Contact the Technical Department for more information.

21F / Rear male clevis (MP4)

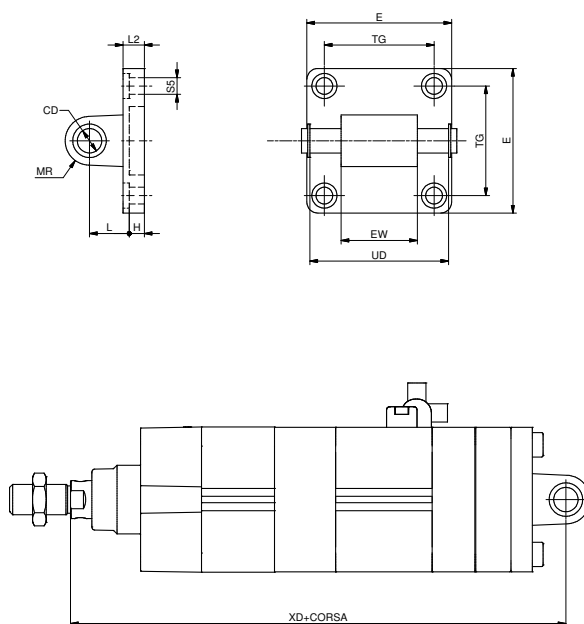

Dimension	Ø80	Ø100
CD	16	20
E	95	115
EW	50 (-0.2/-0.6)	60 (-0.2/-0.6)
H	14	16
L	22	25
MR	16	20
TG	72	89
UB (-0.5/-0)	91	111
XD	325.25	341.25
L2 (+/- 0.5)	10	10
S5	11	11
Weight [g]	1350	2400

The Ø125 mm version is available on request.
Contact the Technical Department for more information.

1390-Series



Ecolight cylinders according to ISO 15552 standard with integrated metal rodscraper

Permanent protection of the piston rod against welding debris particles: the metallic wiper constantly wipes any welding deposits off the piston rod.

The seal is made of a special FKM-based elastomer with approx. 81 shore hardness.

Technical features

Fluid	Filtered and preferably lubricated air (if lubricated the lubrication must be continuous)
Max. pressure	10 bar

Product features

End plates	Die-casting aluminum
Rod	C43 chromed steel
Barrel	Anodised aluminum alloy
Rod-guide bushing	Spheroid bronze on steel band with P.T.F.E. coat
Seals	Standard: NBR oil resistant rubber, PUR piston rod seals (PUR seals available upon request)
Cushion adjusting screws	Brass

Ecolight cylinders

Bore		32	40	50	63	80	100	125	160	200
AM		22	24	32	32	40	40	54	72	72
B (d11)		30	35	40	45	45	55	60	65	75
BG		16	16	18	18	16	16	21	25	25
E		47	54	65	76	95	113	138	180	216
EE		G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G1/2"	G3/4"	G3/4"
G		29.5	33	32	36	38.5	41.5	48	49	49
KK		M10x1.25	M12x1.25	M16x1.5	M16x1.5	M20x1.5	M20x1.5	M27x2	M36x2	M36x2
KV		17	19	24	24	30	30	41	55	55
KW		6	7	8	8	9	9	12	18	18
L2		19	22	29	29	35	36	45	50	60
L3		4	4	5	5	/	/	/	/	/
L8		94	105	106	121	128	138	160	180	180
MM		12	16	20	20	25	25	32	40	40
PL		13	16	18	18	16	18	25	26	25
PM		3	4	5	4.5	2.5	6	8	11	11
RT		M6	M6	M8	M8	M10	M10	M12	M16	M16
SW		10	13	17	17	22	22	27	36	36
TG		32.5	38	46.5	56.5	72	89	110	140	175
VA		4	4	4	4	4	4	6	6	6
VB		33	41	51	51	65	71	75	70	75
VD		4	4	4	4	4	4	6	6	6
VF		12	12	16	16	20	20	25	30	30
VG		48	54	69	69	86	91	119	152	167
WH		26	30	37	37	46	51	65	80	95
Weight (g)	Stroke 0	460	650	1,030	1,360	2,180	2,890	5,700	11,200	14,900
	every 10 mm	23	32	45	49	75	81	130	195	245

Ordering string

1390-Series

1390

050

0400

01R

1390

VERSION

050

SIZE

32 = Ø 32 mm
40 = Ø 40 mm
50 = Ø 50 mm
63 = Ø 63 mm
80 = Ø 80 mm

0400

STROKE


From 0 to 150 mm = every 25 mm
From 150 to 500 mm = every 50 mm
From 500 to 1000 mm = every 100 mm

01R



SPECIFICATION

01R = chromed rod; with metal rodscraper

1390 / Ecolight cylinders

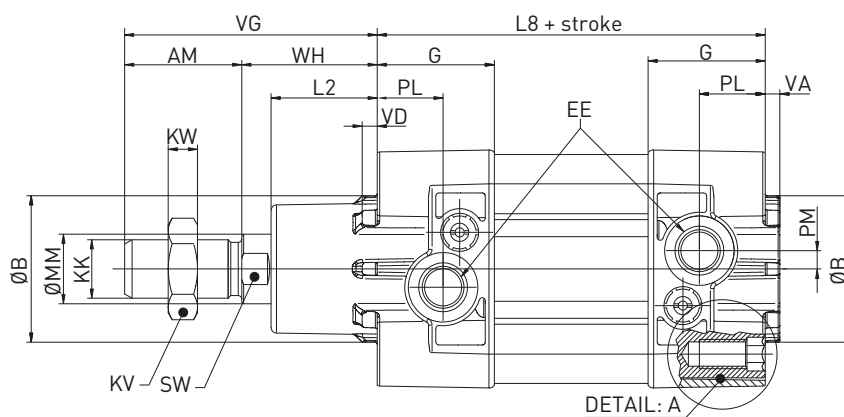

DETAIL: A
Ø32÷Ø63



* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ±0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ±0.1

REV. 00 - 03/04/2015

6110-Series

Guided compact cylinder with additional metal rod scrapers



The rod guide is equipped with bearing bushings and guarantees **high precision and high loads**.

Technical characteristics

Function	double acting
Fluid	filtered air, if lubricated, the lubrication must be continuous
Working pressure	max. 10 bar
Working temperature	-5°C - +70°C
Cushioning	elastic bumper on both ends

Construction characteristics

Body	anodised aluminium
Guide rods	tempered and chromed steel
Piston	aluminium
Piston rod	C43 chromed steel
Rods bushing	bearing bushing
End plate	anodised aluminium
Piston seal	oil resistant NBR rubber
Piston rod seal	PUR
Rod scrapers	brass with a NBR seal
Plate	nickel plated steel

The cylinders are equipped with 4 rod scrapers on the guide rods and 1 rod scraper on the central piston rod

Standard strokes

Bore	Stroke								
	10	20	25	50	100	125	150	175	200
Ø32			•	•	•	•	•	•	•
Ø40			•	•	•	•	•	•	•
Ø50			•	•	•	•	•	•	•
Ø63			•	•	•	•	•	•	•

Intermediate strokes can be obtained using spacers with defined length (5, 10, 15, 20 mm).

Example: It is possible to obtain a **6110.32.45.C** cylinder from a **6110.32.50.C** cylinder by inserting a spacer with length of 5 mm.

The intermediate strokes manufactured without the use of spacers are considered special executions.

Ordering string

6110-Series

6110 50 175 C
6110

VERSION

50

SIZE

32 = Ø 32 mm
40 = Ø 40 mm
50 = Ø 50 mm
63 = Ø 63 mm

175

STROKE







25 = 25 mm **150** = 150 mm
50 = 50 mm **175** = 175 mm
100 = 100 mm **200** = 200 mm
125 = 125 mm

C

SPECIFICATION

C = Side supply ports closed
CL = Top supply ports closed

6110 / Guided compact cylinder

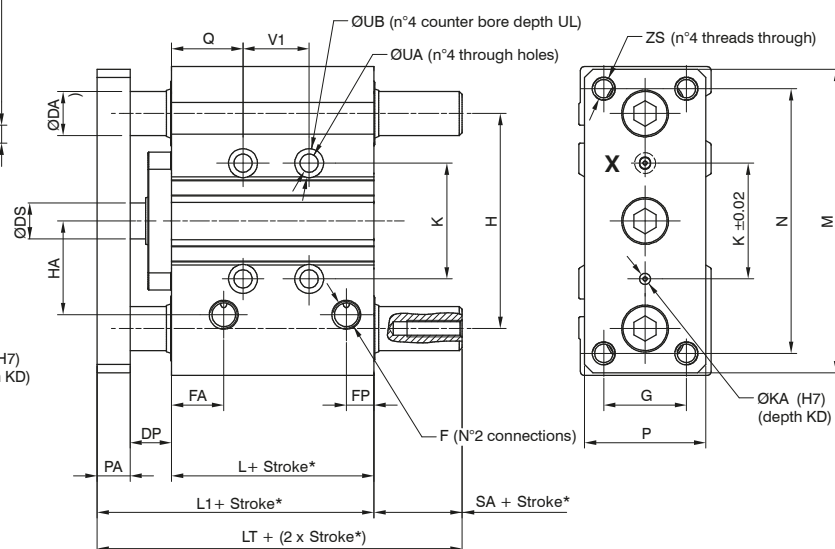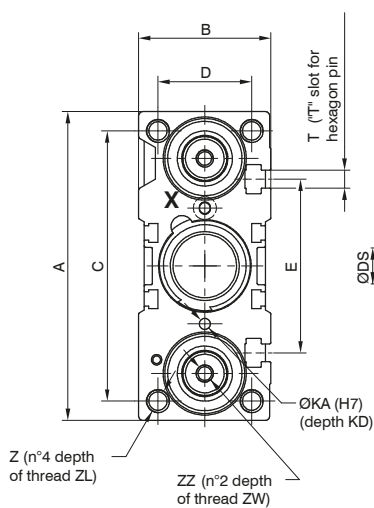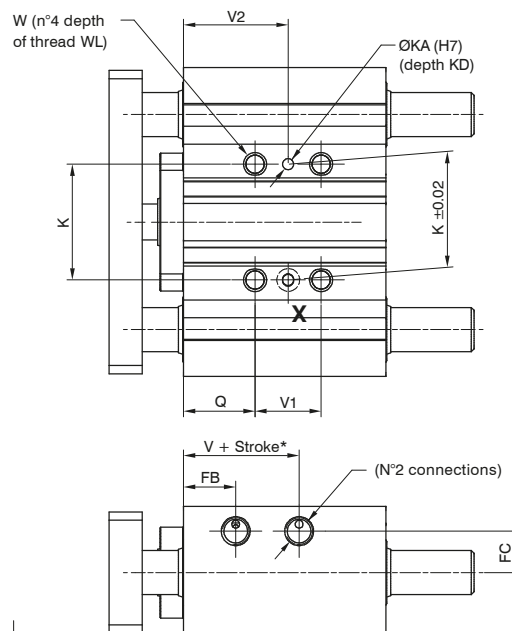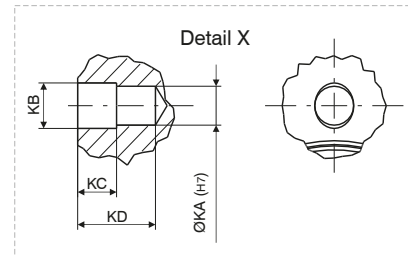

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1


REV. 00 - 03/04/2015

Overall dimensions


Bore	Ø32	Ø40	Ø50	Ø63
Table of dimensions				
A	112	120	148	162
B	48	54	64	78
C	98	106	130	142
D	34	40	46	58
DA	16	16	20	20
DP	15	20	23	23
DS	16	16	20	20
E	63	72	92	110
F	G1/8"	G1/8"	G1/4"	G1/4"
FA	19	13	13	14
FB	19	13	13	14
FC	15	18	21,5	28
FP	10	11	11	12,5
G	30	30	40	50
H	78	86	110	124
HA	34	38	47	55
K	42	50	66	80
KA	4	4	5	5
KB	4,5	4,5	6	6
KC	3	3	4	4
KD	6	6	8	8
L	48,5	50	50	55
L1	75,5	82	88	93
LT	82,5	89	93	100
M	110	118	146	158

Bore	Ø32	Ø40	Ø50	Ø63
Table of dimensions				
N	96	104	130	130
PA	12	12	15	15
P	44	44	60	70
Q	26	22	24	24
SA	7	7	5	7
T	M6	M6	M8	M10
TA	6,5	6,5	8,5	11
TB	10,5	10,5	13,5	17,8
TC	5,5	5,5	7,5	10
TD	9,5	11	13,5	18,5
TE	3,5	4	4,5	7
UA	6,6	6,6	8,6	8,6
UB	11	11	14	14
UL	7,5	7,5	9	9
V	17	19	15	20
V1	See table 1			
V2				
W	M8x1,25	M8x1,25	M10x1,5	M10x1,5
WL	16	16	20	20
Z	M8x1,25	M8x1,25	M10x1,5	M10x1,5
ZL	20	20	22	22
ZS	M8x1,25	M8x1,25	M10x1,5	M10x1,5
ZZ	M6	M8	M10	M10
ZW	20	20	25	25





Table 1	Bore	Ø32	Ø40	Ø50	Ø63
V1	stroke ≤ 25		24		28
	25 < stroke ≤ 100		48		52
	100 < stroke ≤ 2100		124		128
V2	stroke ≤ 25	38	34	36	38
	25 < stroke ≤ 100	50	46	48	50
	100 < stroke ≤ 2100	88	84	86	88

Cylinder force - Operating criteria
Anti-rotation accuracy in retracted and without load application


Bore	Anti-rotation accuracy θ
Ø32	±0,01°
Ø40	
Ø50	
Ø63	

Recommended torque moments


Bore	Ø32	Ø40	Ø50	Ø63
	Nm	Nm	Nm	Nm
25	5,55	5,95	8,99	10,57
50	5,52	5,97	9,21	10,70
75	5,51	5,98	9,33	10,76
100	5,50	5,99	9,41	10,81
125			9,47	10,84
150	5,49	6,00	9,51	10,86
175			9,54	10,88
200	5,48		9,56	10,90

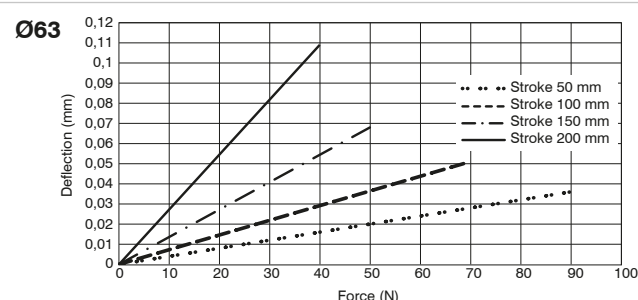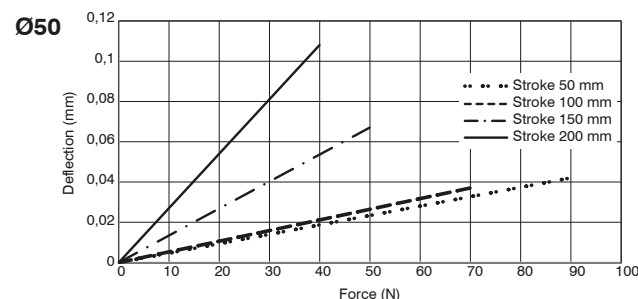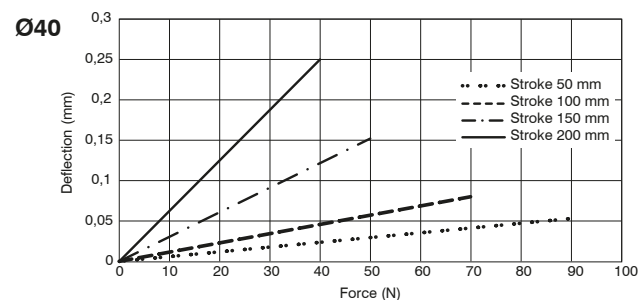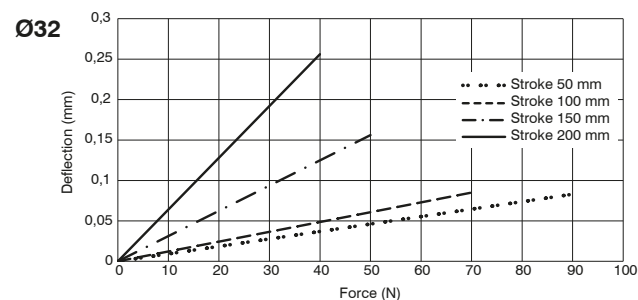Rods charts


Special design products

Cooling water intake cylinder for welding guns' electrodes replacement


Customized special design products:

PNEUMAX engineering department will analyse every request for any specific application and will adapt or develop new components to meet the customer's needs. **Get in touch with us!**

The capacity of the intake chamber is 0.1 l.


The cylinder can be mounted to the service panel (RIP) for automated welding.

Not suitable for manual welding operations

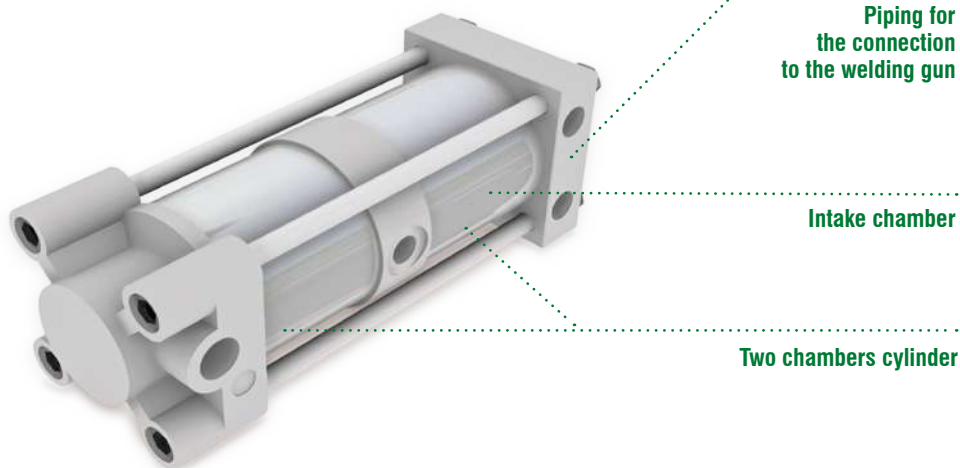

PCY0050 / Cooling water intake cylinder

REV. 00 - 18/02/2015

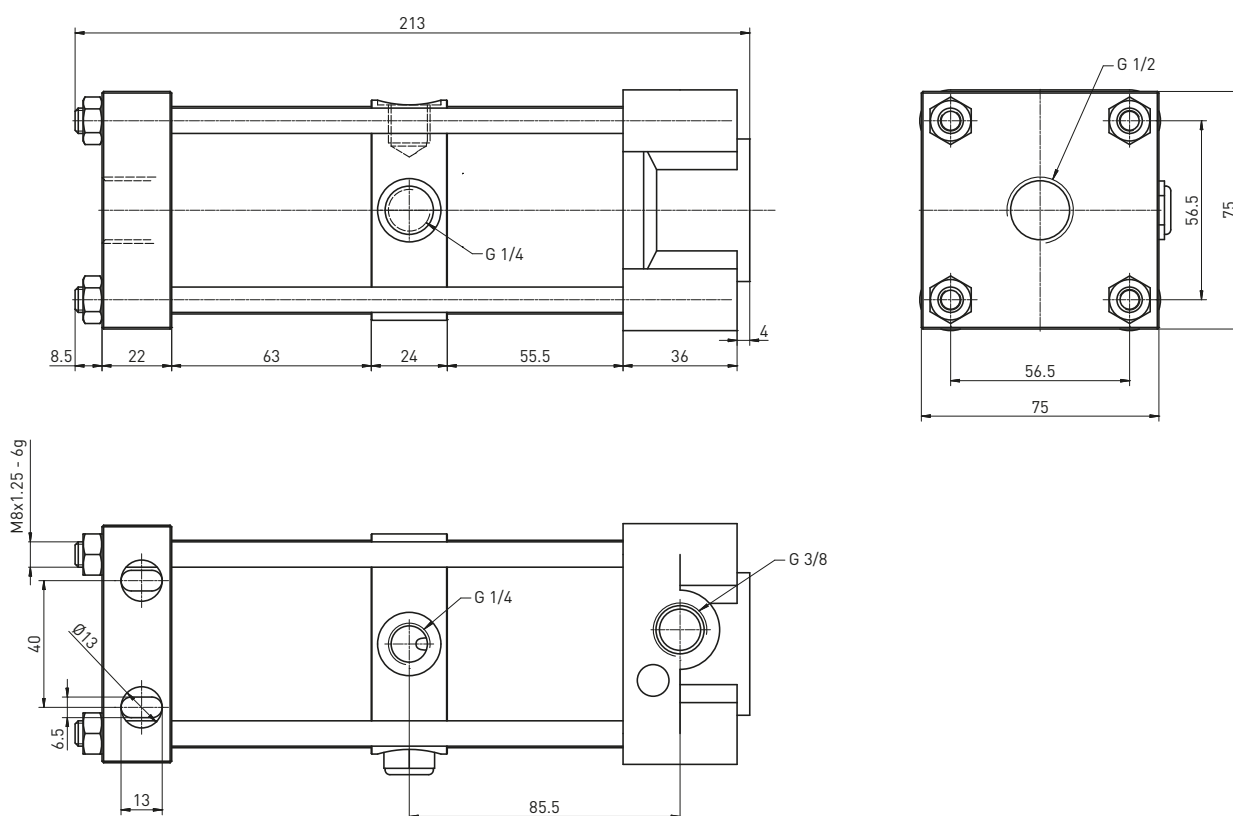

ACTUATION

Complementary products



Tubes

External layer:
Flame resistant V-0


Middle layer:
Aluminum foil

Inner layer:
Polyurethane



Fittings

Fully guided
sleeve



Tubes



Patented



Three-Layer Polyurethane tube

- High flexibility
- Spatter resistant
- Suitable for arc welding and for pneumatic piping in harsh environments
- Available in 3 colours
- Temperature range: -20°C + 70°C

Technical features

Part no.	D x d mm	T mm	P bar	P1 bar	R mm	Weight (kg)	Package mt
FRTTPU0425	4 x 2.5	1	8	36	30	3.85	100
FRTTPU0604	6 x 4	1	8	36	50	7.2	100
FRTTPU0805	8 x 5	1	8	32	60	8.3	100
FRTTPU1065	10 x 6.5	1	8	28	70	11	100
FRTTPU1208	12 x 8	1	8	24	80	13.5	100


Shore: A 95

D = external diameter
d = internal diameter
P1 = -breaking pressure

T = cover thickness
R = bending radius

To be used with AT-fitting series, to allow a proper protection of the tube from welding sparks.

Cutting specs

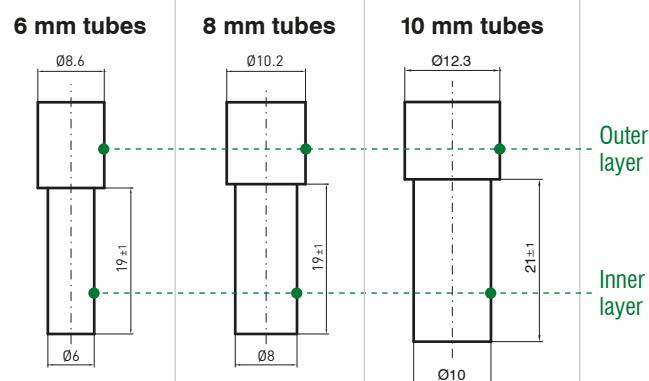

To allow a proper installation of the fittings, cut 19 mm out of the outer layer.

Ordering string

Polyurethane tube

FRTTPU 06 04 N

VERSION	FRTTPU = 3-layer polyurethane tube	
06	OUTER DIA	04 = Ø 4 mm
		06 = Ø 6 mm
		08 = Ø 8 mm
		10 = Ø 10 mm
		12 = Ø 12 mm
04	INNER DIA	25 = Ø 2.5 mm
		04 = Ø 4 mm
		05 = Ø 5 mm
		65 = Ø 6.5 mm
		08 = Ø 8 mm
N	COLOUR	N = black
		B = blue
		R = red

Cutting devices for tubes


FRC06	CUTTER FOR FRTTPU Ø 6	min. order quantity 5 pieces
FRC08	CUTTER FOR FRTTPU Ø 8	min. order quantity 5 pieces
FRC10	CUTTER FOR FRTTPU Ø 10	min. order quantity 5 pieces
FRC12	CUTTER FOR FRTTPU Ø 12	min. order quantity 5 pieces



Fittings




Patented

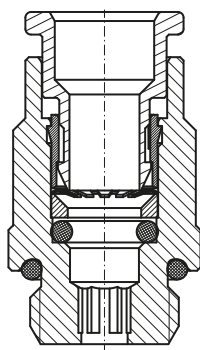


Brass push-in fittings for welding applications


- No covers required spatter-proof
- Prolonged thrust sleeve for optimal protection of the tube against welding debris
- The internal components are optimally guided for an enhanced retaining of the tubes
- Specific for 3-layer polyurethane tube
- Temperature range: -20°C +70°C

Ø
6

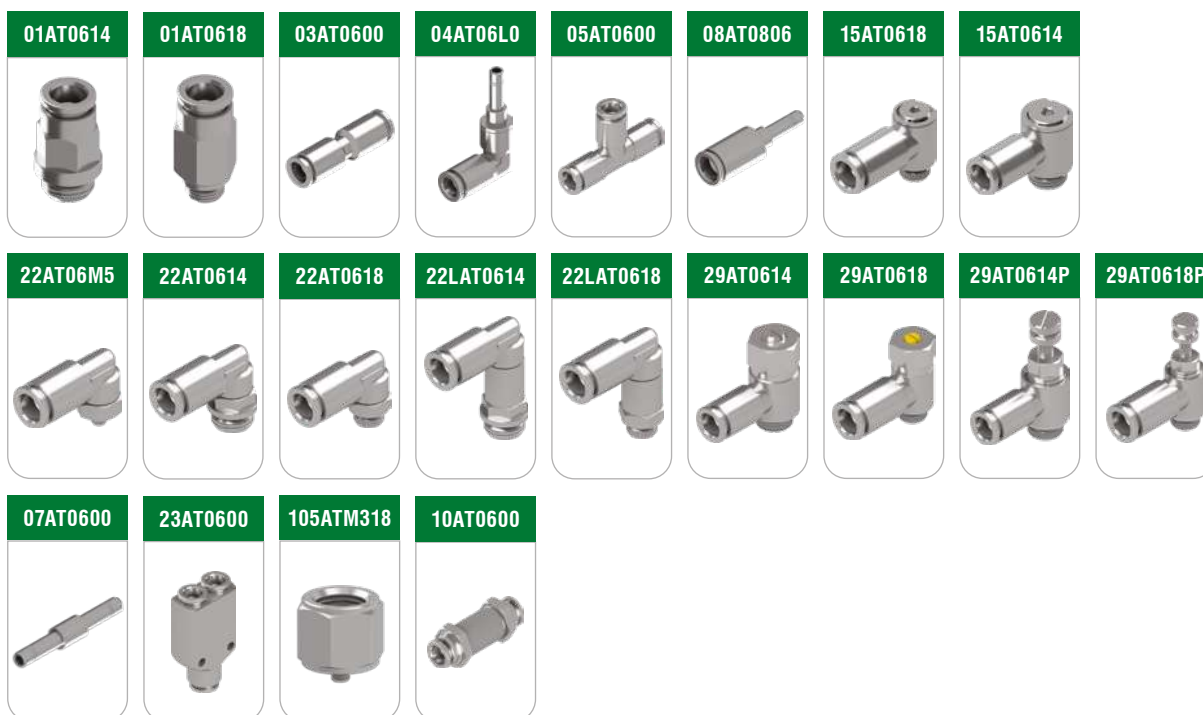


Ø
8

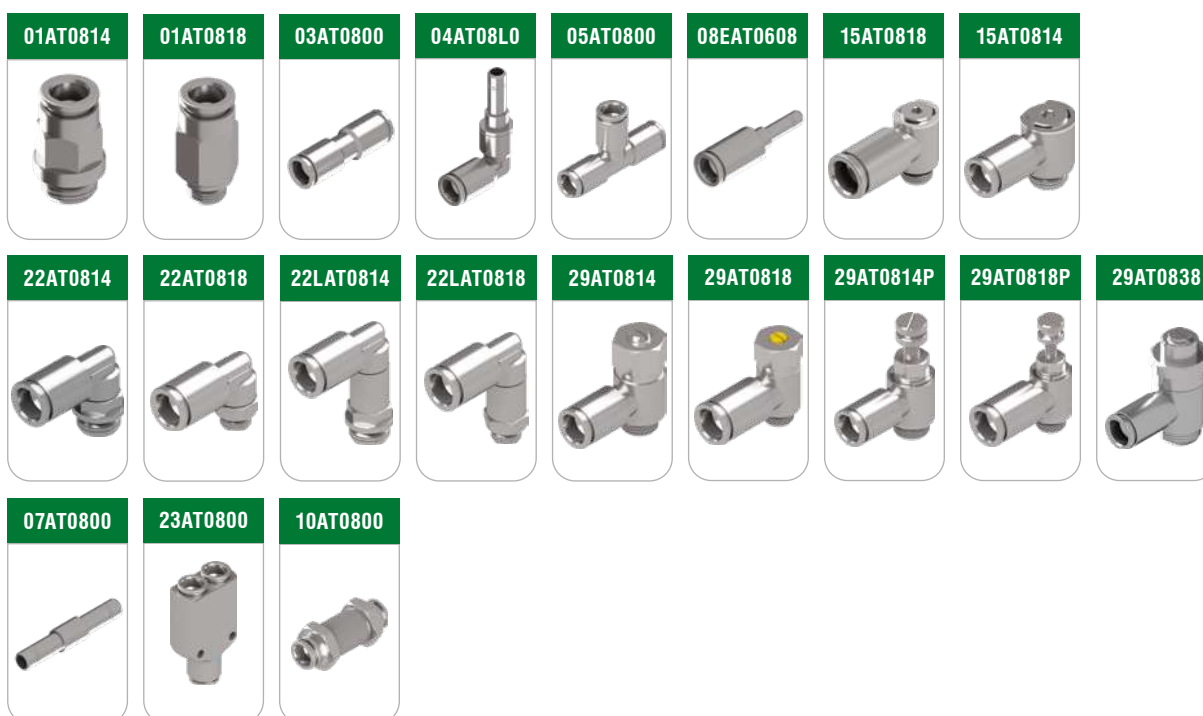

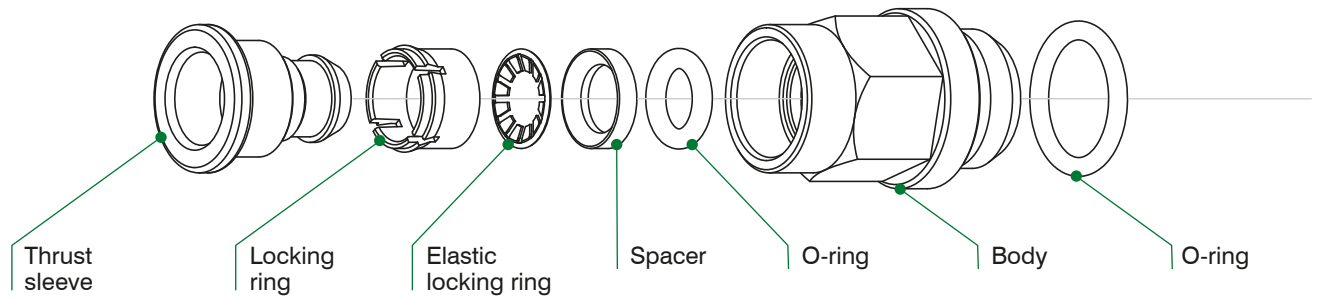

Ø
10

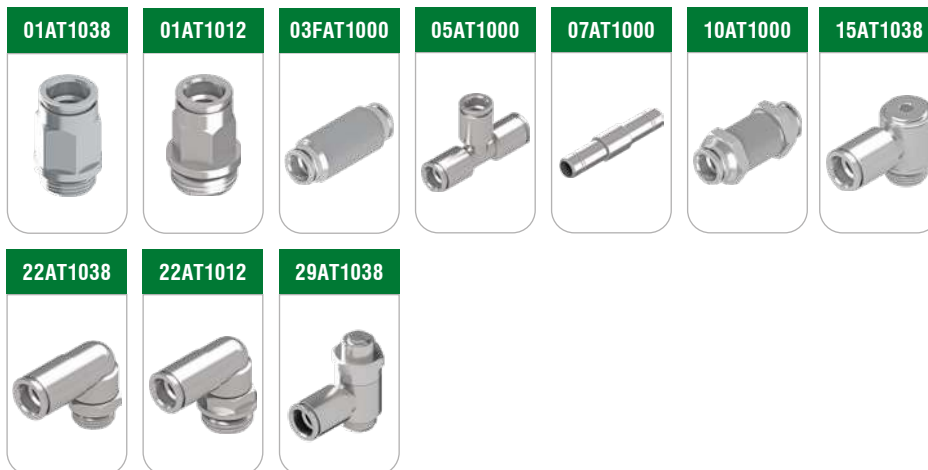

Selection of accessories



01AT0614


REV. 00 - 12/10/2018



Straight fitting

Ø6 G1/4"

AT Series with NBR seals

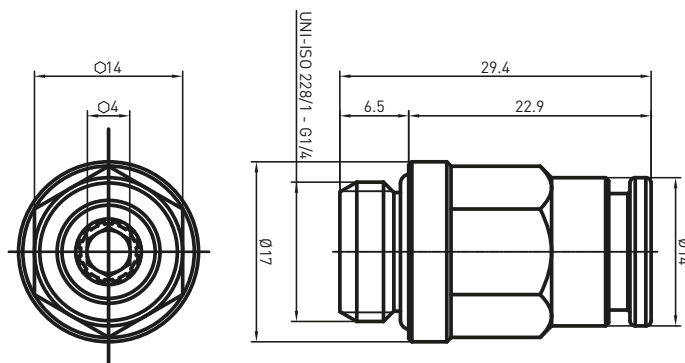

01AT0618


REV. 00 - 12/10/2018



Straight fitting

Ø6 G1/8"

AT Series with NBR seals

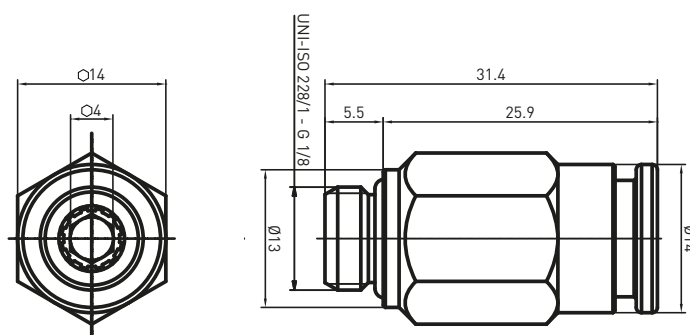

03AT0600


REV. 00 - 15/10/2018



Straight connector

Ø6

AT Series with NBR seals

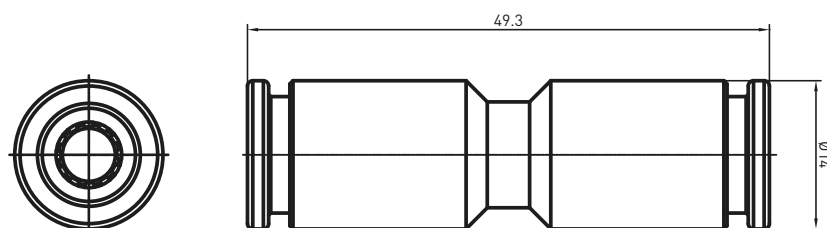


04AT06L0

REV. 00 - 15/10/2018

**Elbow connector**

Ø6

AT Series with NBR seals

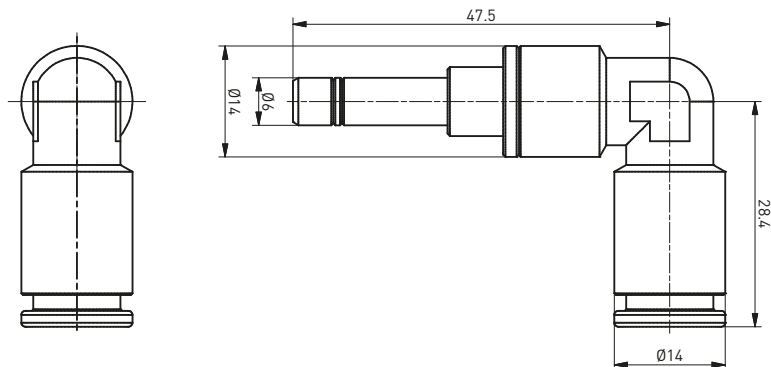
**05AT0600**

REV. 00 - 29/11/2018

**T connector**

Ø6

AT Series with NBR seals

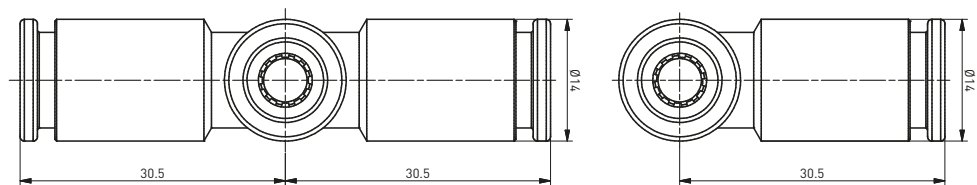
**08AT0806**

REV. 00 - 27/09/2018

**Plug-in reducer**

Ø8M Ø6F

AT Series with NBR seals

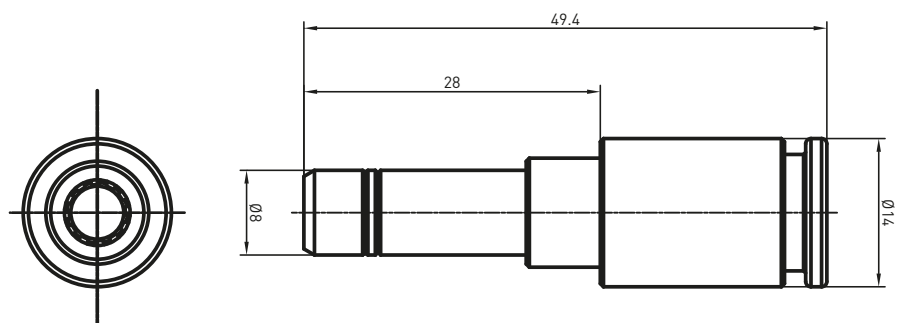



15AT0618



Complete single banjo

Ø6 - G1/8"

AT Series with NBR seals

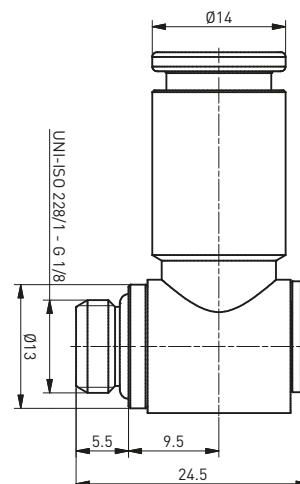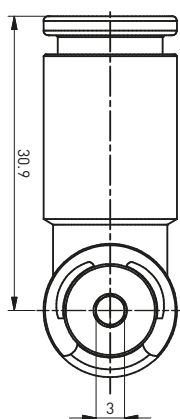

REV. 00 - 15/10/2018



15AT0614



Complete single banjo

Ø6 - G1/4"

AT Series with NBR seals

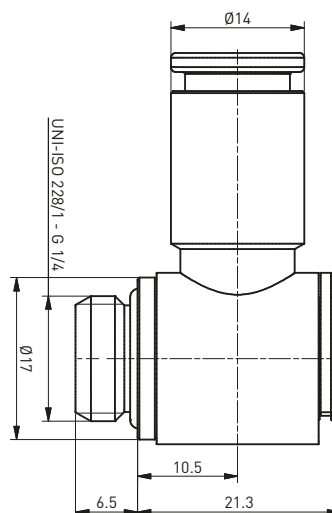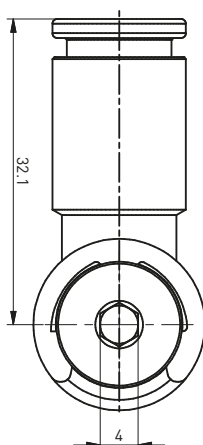



REV. 00 - 15/10/2018

22AT06M5



**Swivel elbow male
adaptor parallel**

Ø6 - M5

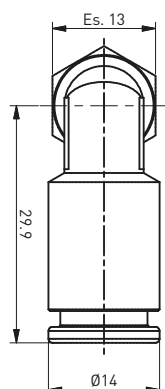

REV. 00 - 29/11/2018



22AT0614

REV. 00 - 15/10/2018

**Swivel elbow male
adaptor parallel**

Ø6 - G1/4"

AT Series with NBR seals

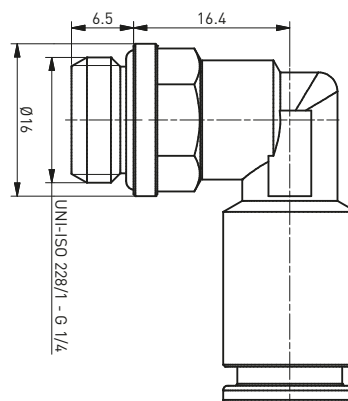
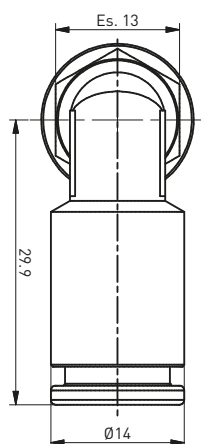
**22AT0618**

REV. 00 - 15/10/2018

**Swivel elbow male
adaptor parallel**

Ø6 - G1/8"

AT Series with NBR seals

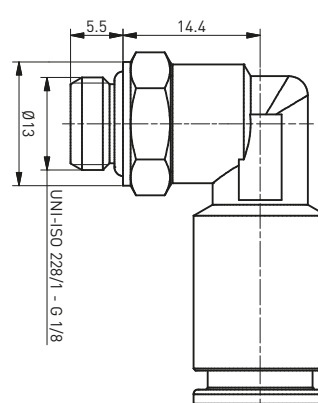
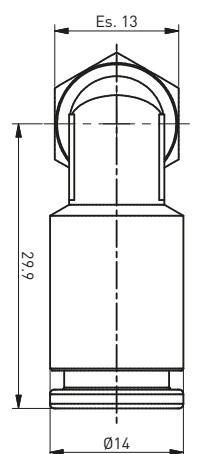
**22LAT0614**

REV. 00 - 27/09/2018

**Swivel longer elbow
male adaptor parallel**

Ø6 - G1/4"

AT Series with NBR seals

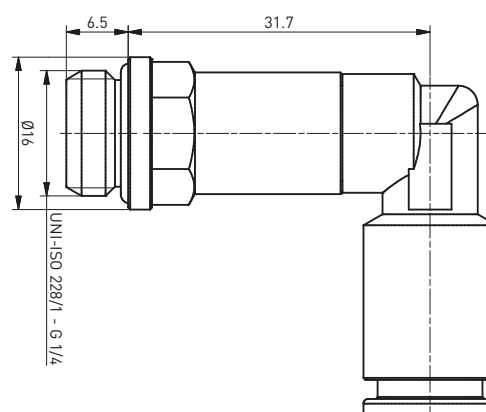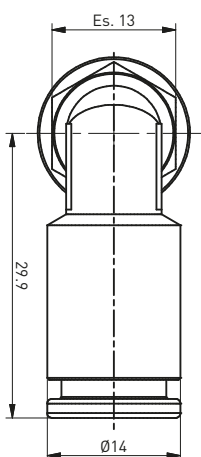

22LAT0618



REV. 00 - 15/10/2018



**Swivel longer elbow
male adaptor parallel**

Ø6 - G1/8"

AT Series with NBR seals

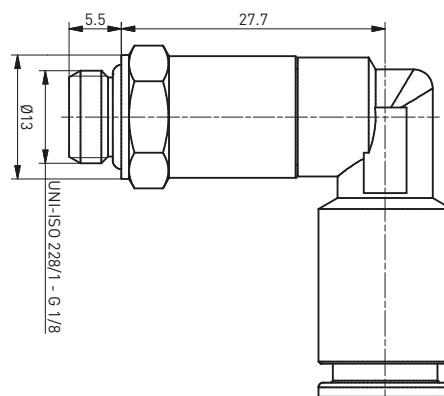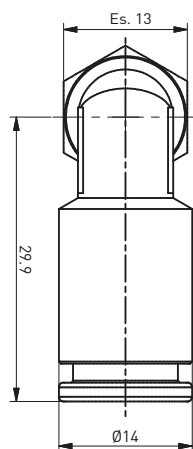

29AT0614



REV. 00 - 29/08/2018



Flow adjuster

Ø6 - G1/4"

AT Series with NBR seals

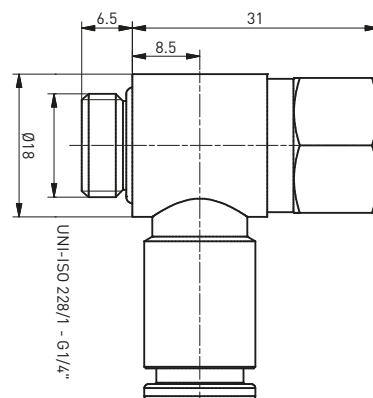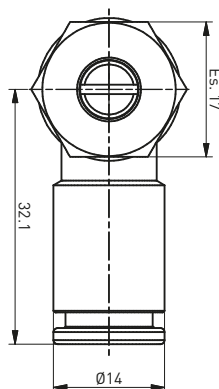

29AT0618



REV. 00 - 29/08/2018



Flow adjuster

Ø6 - G1/8"

AT Series with NBR seals

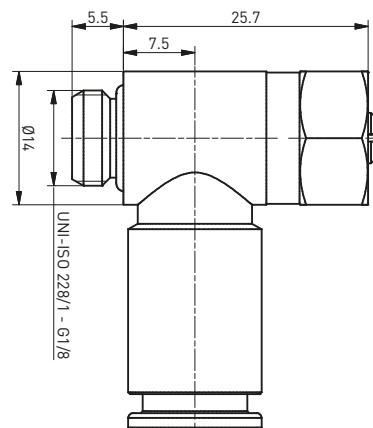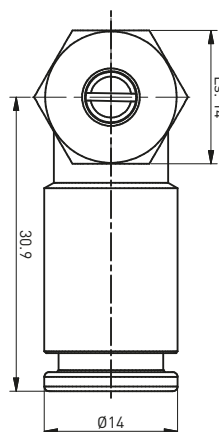

29AT0614P




REV. 00 - 11/10/2018



Flow adjuster

Ø6 - G1/4"

AT Series with NBR seals

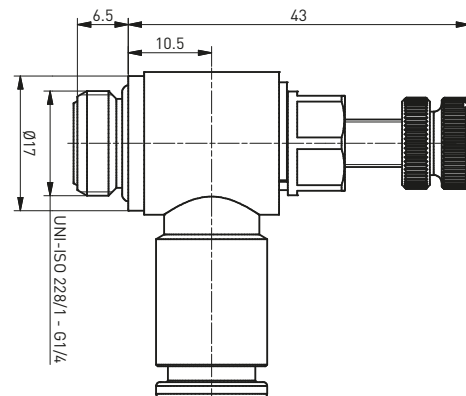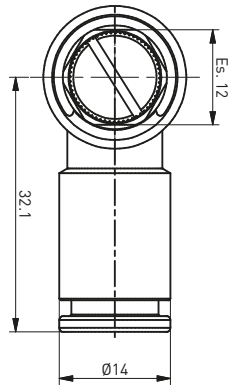

29AT0618P




REV. 00 - 11/10/2018



Swivel elbow male adaptor parallel

Ø6 - G1/8"

AT Series with NBR seals

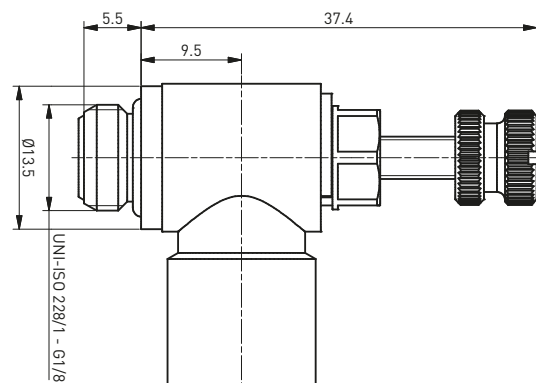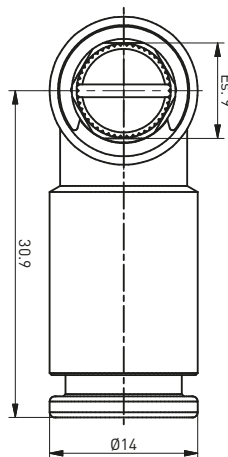

07AT0600


REV. 00 - 11/09/2018



Connector

Ø6

AT Series

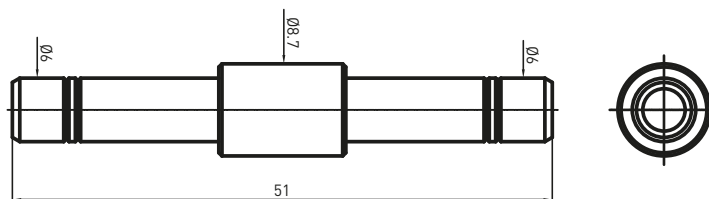

23AT0600




Y Connector

Ø6

AT Series

REV. 00 - 06/03/2019

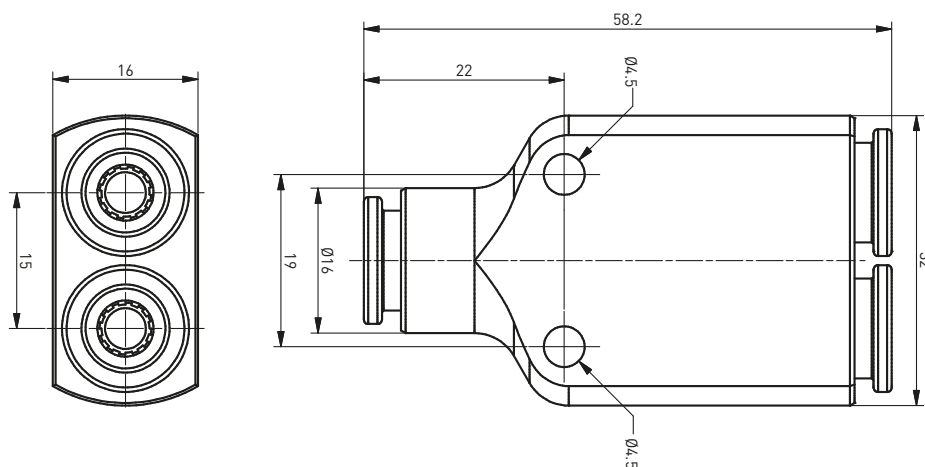


105ATM318



Adaptator

M3 - 1/8"

REV. 00 - 28/03/2018

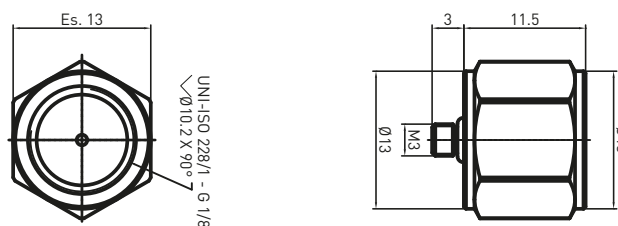


10AT0600



Straight threaded connector

Ø6 - M16x1

REV. 00 - 22/05/2019

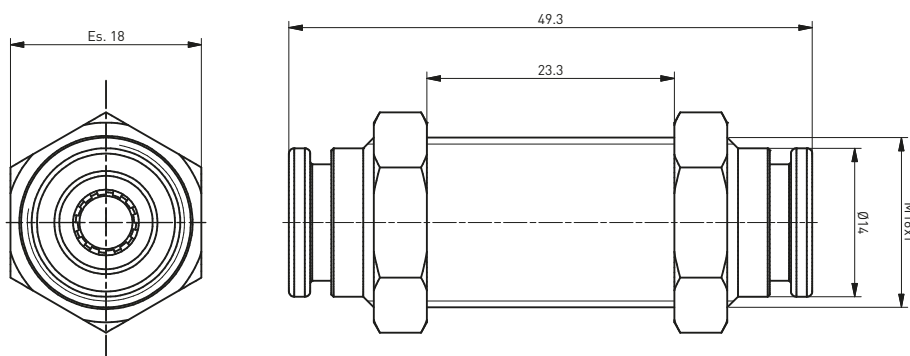

01AT0814



REV. 00 - 08/03/2018



Straight fitting

Ø8 G1/4"

AT Series with NBR seals

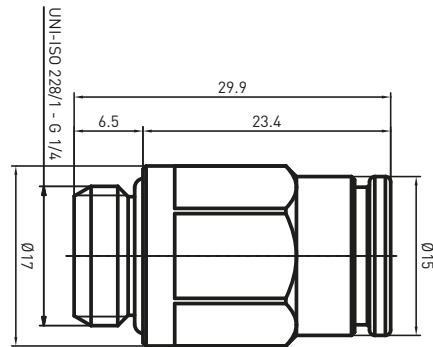

01AT0818



REV. 00 - 29/08/2018



Straight fitting

Ø8 G1/8"

AT Series with NBR seals

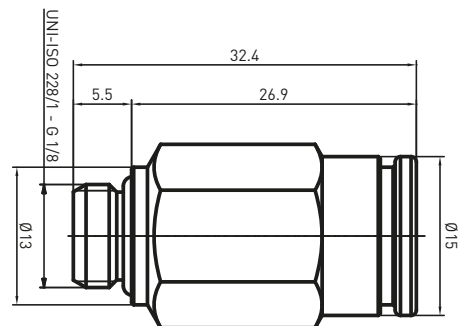

03AT0800



REV. 00 - 03/09/2018



Straight connector

Ø8

AT Series with NBR seals

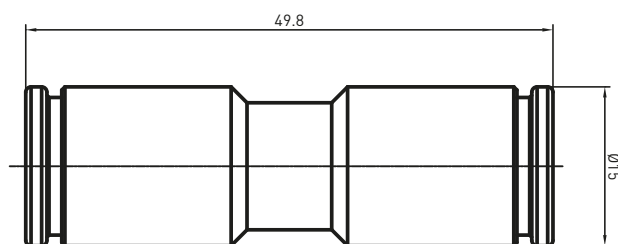

04AT08L0




Elbow connector

Ø8

AT Series with NBR seals

REV. 00 - 14/10/2018

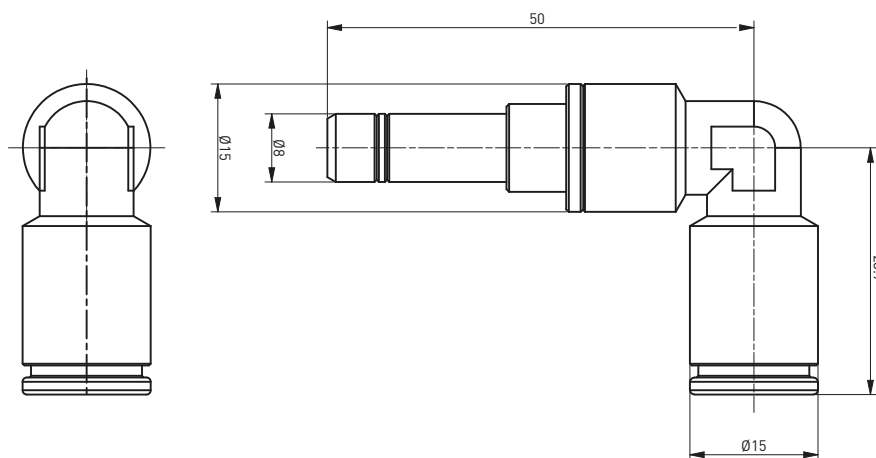

05AT0800




T connector

Ø8

AT Series with NBR seals

REV. 00 - 03/12/2018

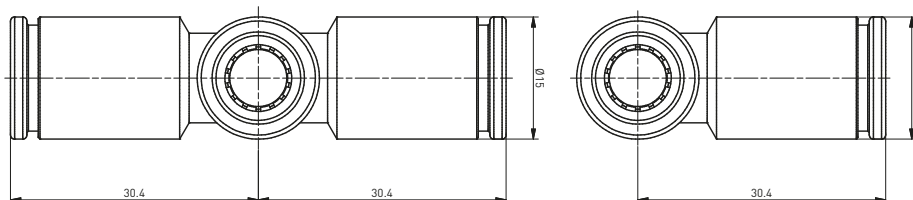

08EAT0608




Plug-in increaser

Ø6M Ø8F

AT Series with NBR seals

REV. 00 - 22/05/2019

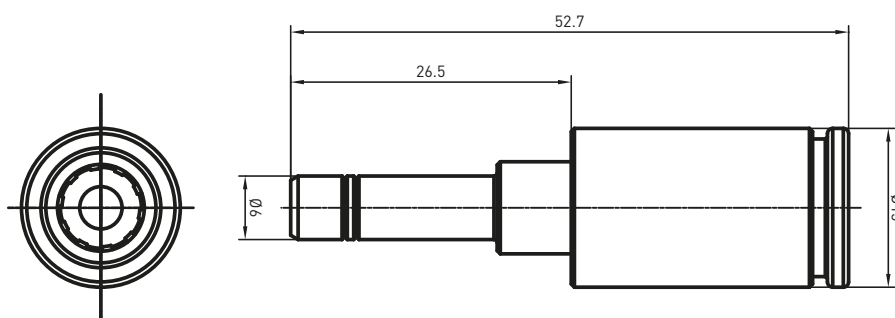



15AT0818

REV. 00 - 30/08/2018

**Complete single banjo**

Ø8 - G1/8"

AT Series with NBR seals

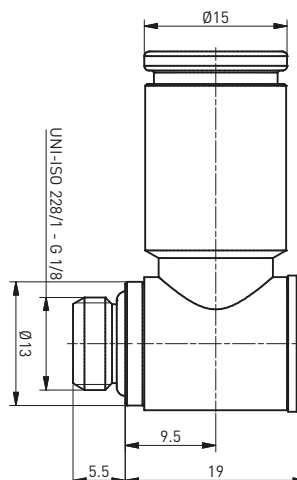
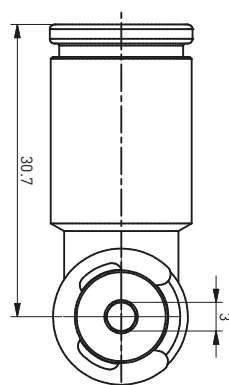
**15AT0814**

REV. 00 - 30/08/2018

**Complete single banjo**

Ø8 - G1/4"

AT Series with NBR seals

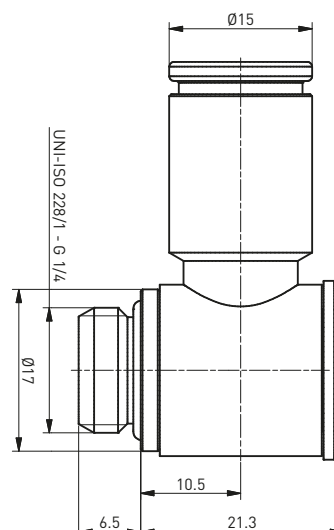
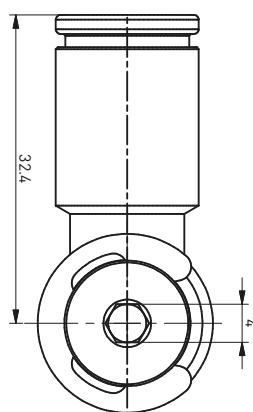
**22AT0814**

REV. 00 - 03/12/2018

**Swivel elbow male
adaptor parallel**

Ø8 - G1/4"

AT Series with NBR seals

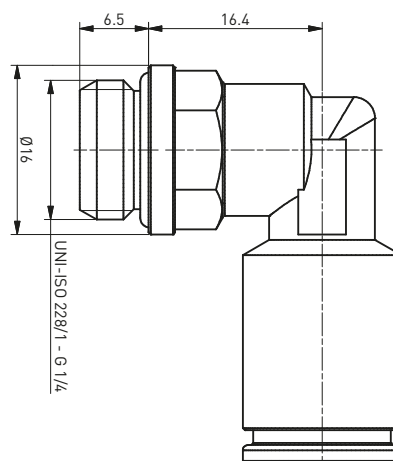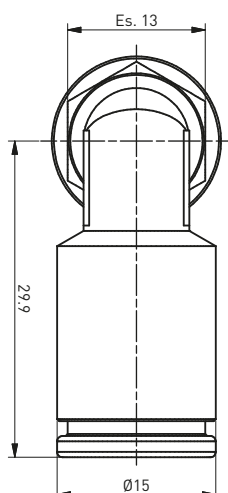

22AT0818



REV. 00 - 03/12/2018



**Swivel elbow male
adaptor parallel**

Ø8 - G1/8"

AT Series with NBR seals

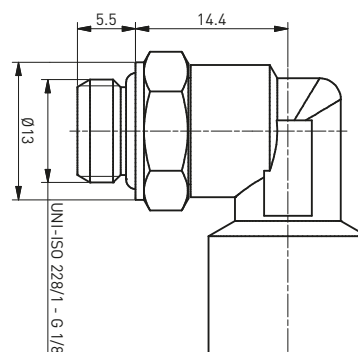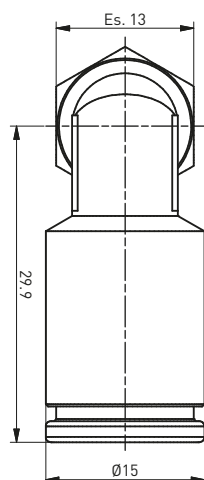

22LAT0814



REV. 00 - 30/08/2018



**Swivel longer elbow
male adaptor parallel**

Ø8 - G1/4"

AT Series with NBR seals

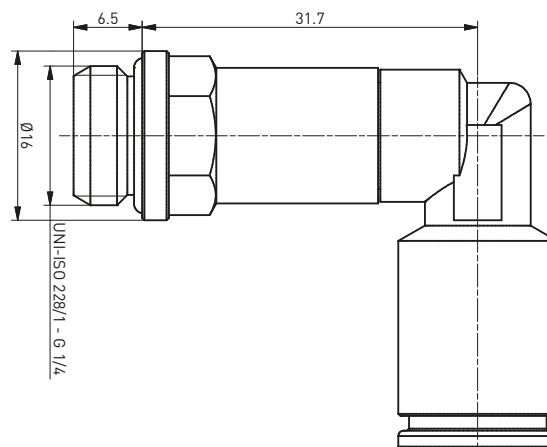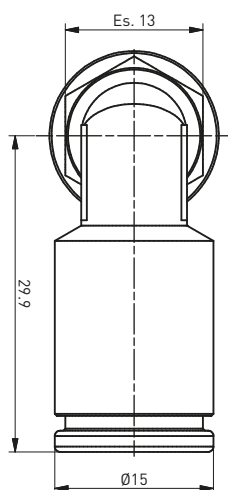

22LAT0818



REV. 00 - 30/08/2018



**Swivel longer elbow
male adaptor parallel**

Ø8 - G1/8"

AT Series with NBR seals

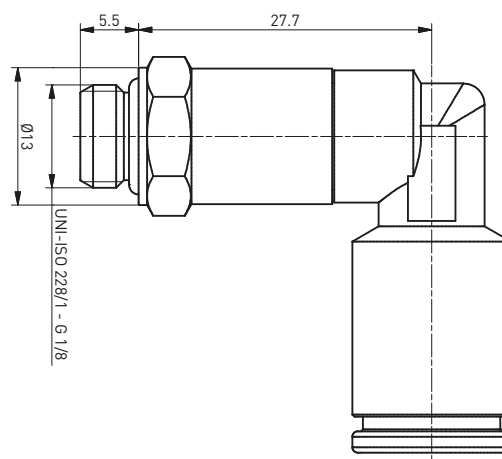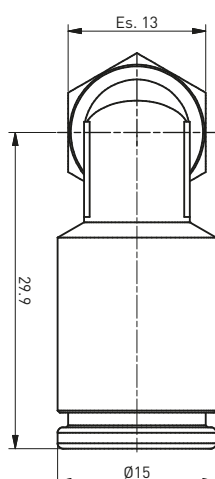




29AT0814

REV. 00 - 29/08/2018

**Flow adjuster**

Ø8 - G1/4"

AT Series with NBR seals

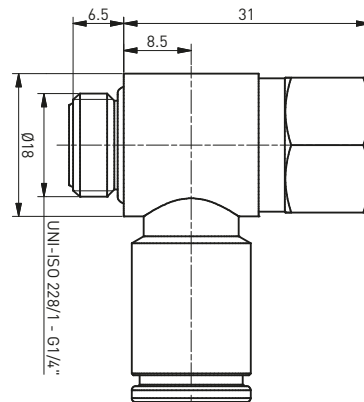
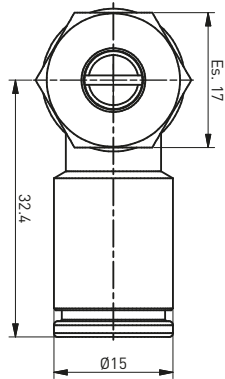

**29AT0818**

REV. 00 - 30/08/2018

**Flow adjuster**

Ø8 - G1/8"

AT Series with NBR seals

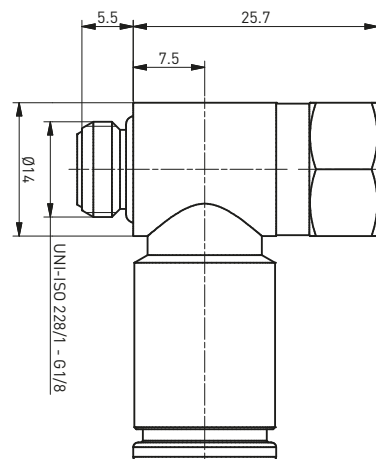
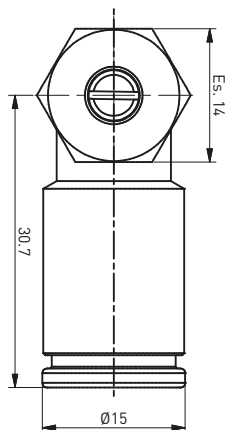

**29AT0814P**

REV. 00 - 11/10/2018

**Flow adjuster**

Ø8 - G1/4"

AT Series with NBR seals

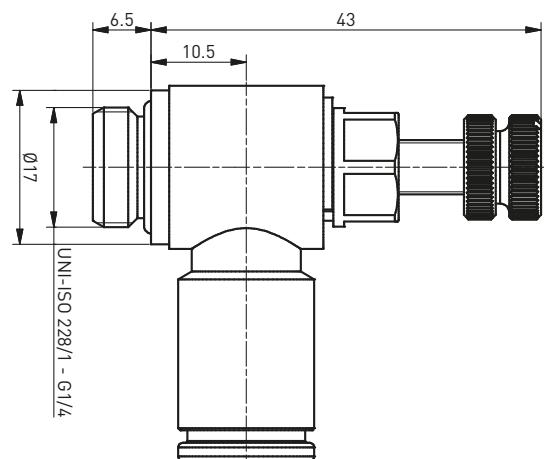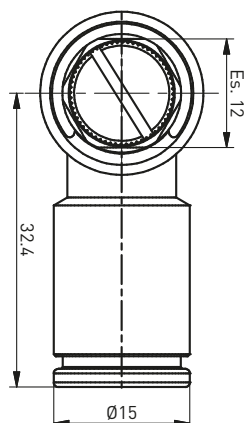




29AT0818P



Flow adjuster

8 - G1/8"

AT Series with NBR seals

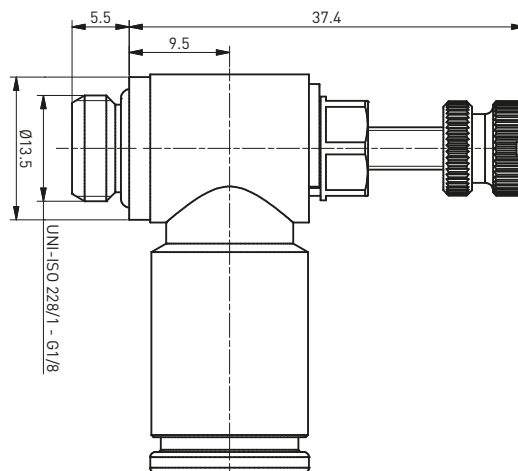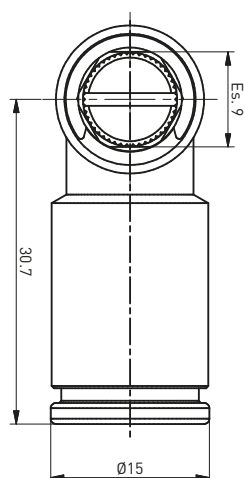




REV. 00 - 11/10/2018

29AT0838



Flow adjuster

Ø8 - G3/8

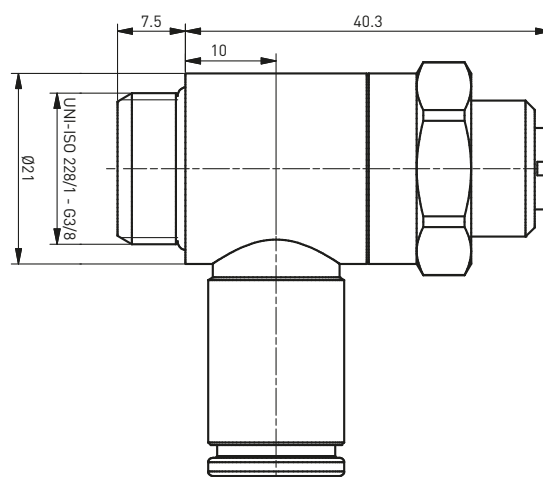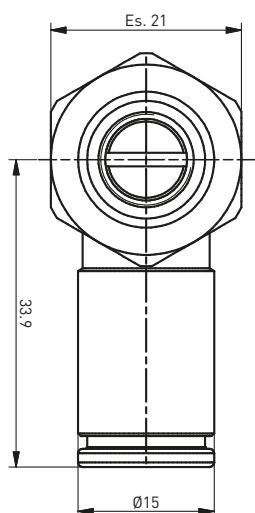

REV. 00 - 04/06/2019


07AT0800



Connector

Ø8

AT Series

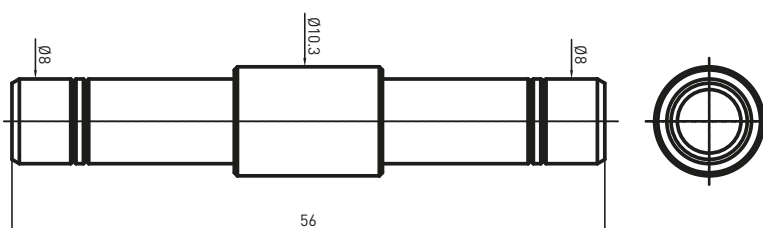

REV. 00 - 11/09/2018


23AT0800

REV. 00 - 06/03/2019

**Y Connector**

Ø8


AT Series

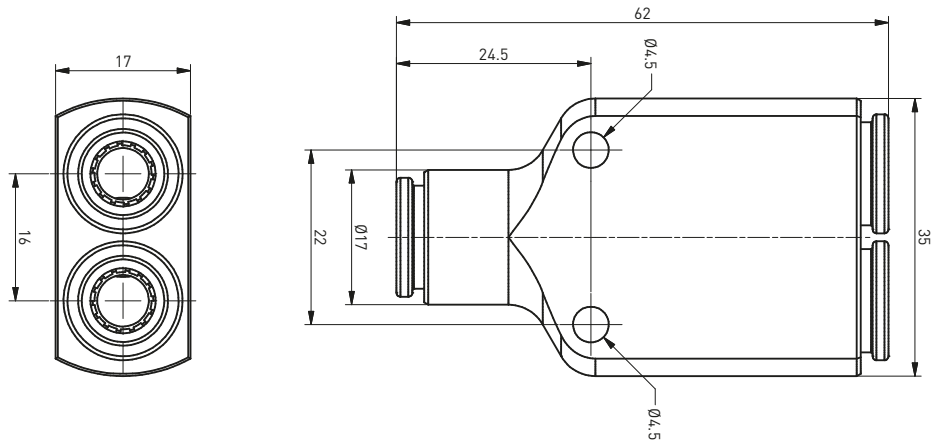**10AT0800**

REV. 00 - 22/05/2019

**Straight threaded
connector**

Ø8 - M18x1

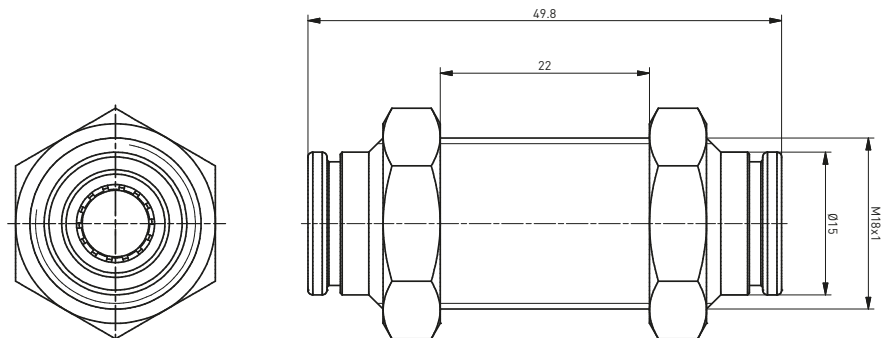
**01AT1038**

REV. 00 - 28/05/2019

**Straight fitting**

Ø10 G3/8"

AT Series with NBR seals

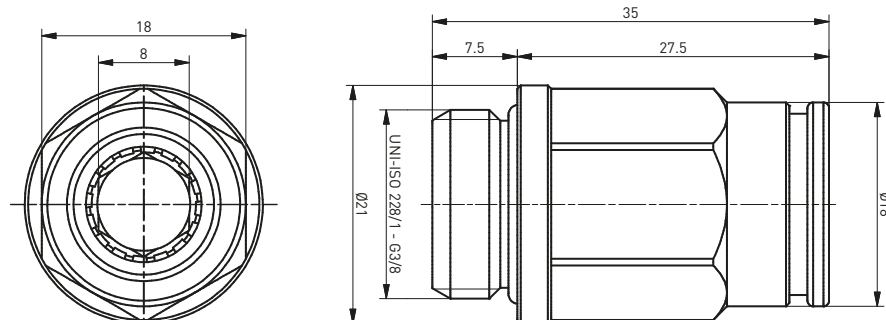

01AT1012



REV. 00 - 28/05/2019



Straight fitting

Ø10 G1/2"

AT Series with NBR seals

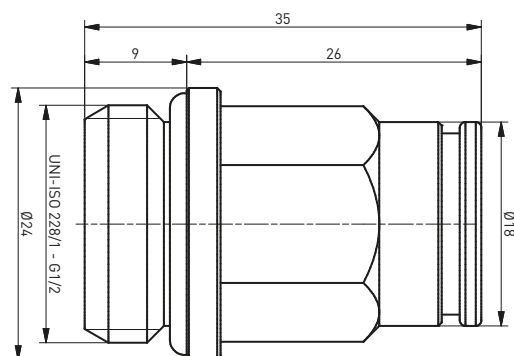

03FAT1000



REV. 00 - 27/05/2019



Straight threaded connector

Ø10

AT Series with NBR seals

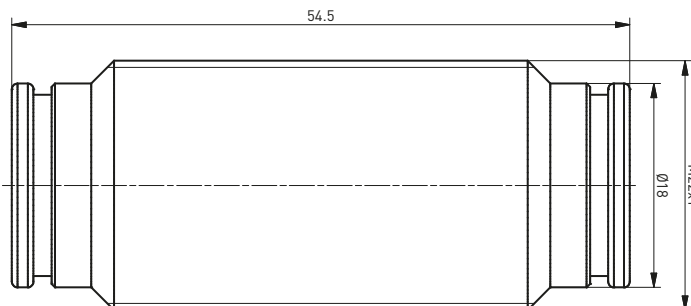

05AT1000



REV. 00 - 28/05/2019



T connector

Ø10

AT Series with NBR seals

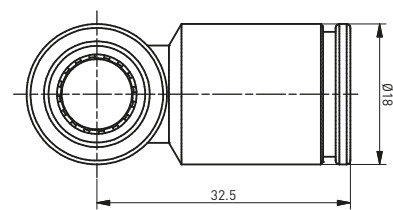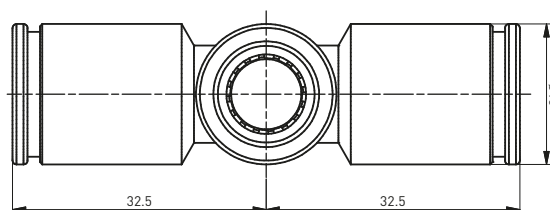

07AT1000


REV. 00 - 28/05/2019



Connector

Ø10

AT Series

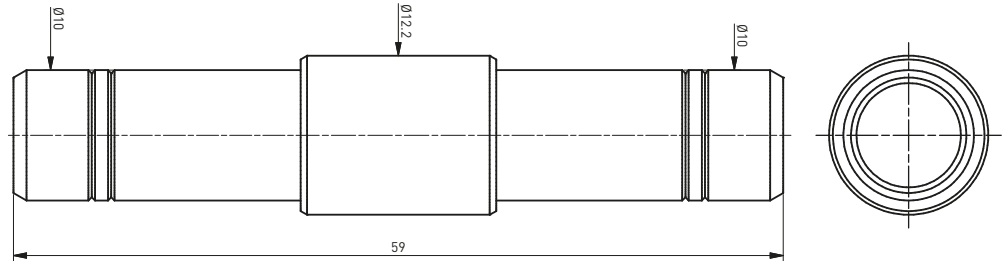

10AT1000


REV. 00 - 27/05/2019



Bulkhead connector

Ø10

AT Series with NBR seals

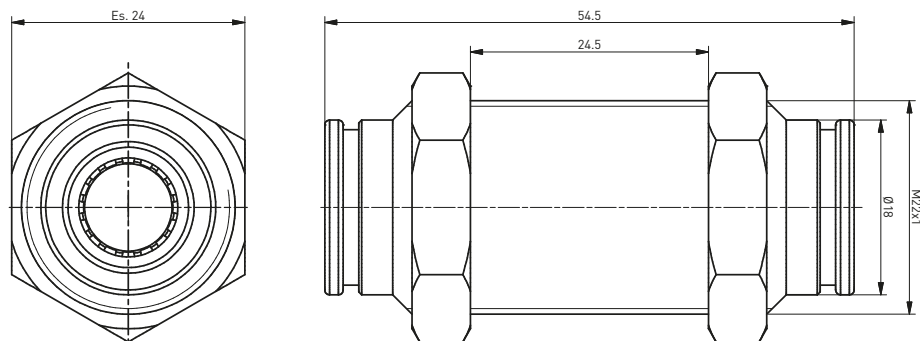

15AT1038


REV. 00 - 30/08/2018



Complete single banjo

Ø10 - G3/8"

AT Series with NBR seals

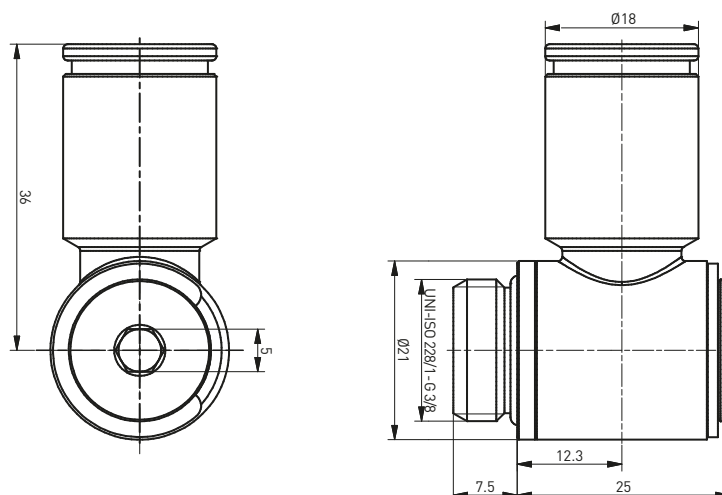



22AT1038



**Swivel elbow male
adaptor parallel**

Ø10 - G3/8"

AT Series with NBR seals

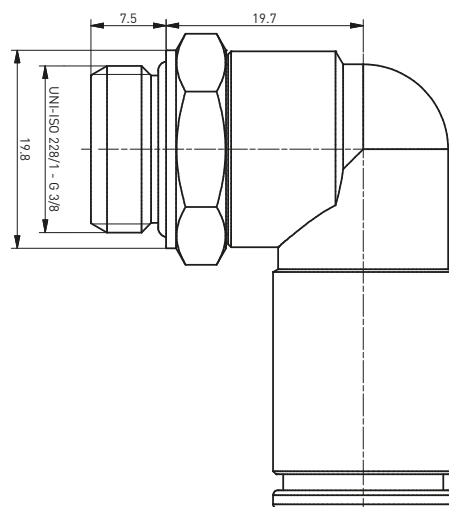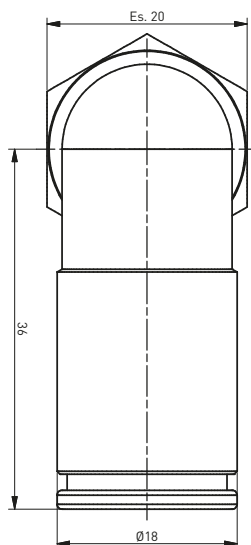

REV. 00 - 04/06/2019



22AT1012



**Swivel elbow male
adaptor parallel**

Ø10 - G1/2"

AT Series with NBR seals

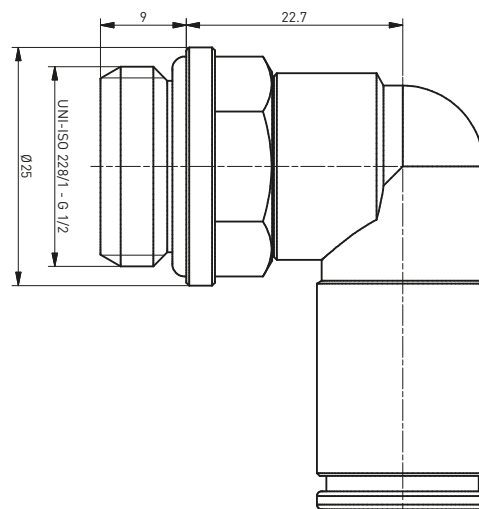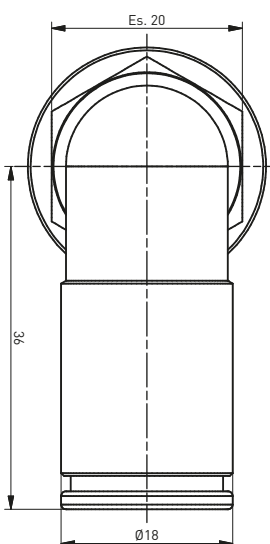

REV. 00 - 04/06/2019




29AT1038



Flow adjuster

Ø10 - G3/8"

AT Series with NBR seals

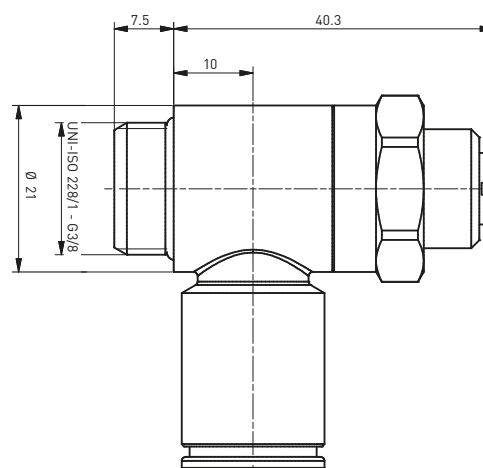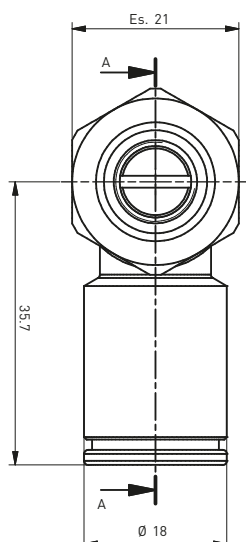

REV. 00 - 04/06/2019

AT50C18V
Connection C 06 = Ring AT Ø6 08 = Ring AT Ø8 **Version V** U = Unidirectional B = Bidirectional



REV. 00 - 20/09/2019



Part. No.	ØC	L
AT500618U AT500618B	6	31
AT500818U AT500818B	8	31

Blocking valve

1/8"

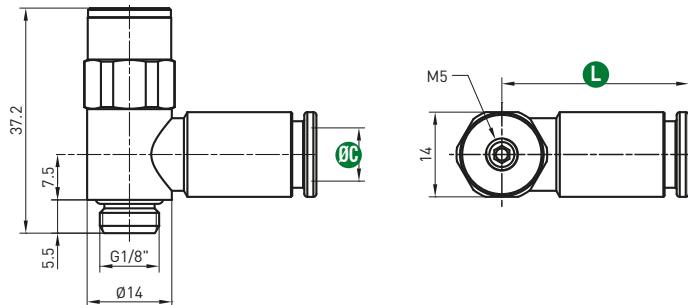**AT50C18PVM**
Connection C 06 = Ring AT Ø6 08 = Ring AT Ø8
Pilot P 06 = Ring AT Ø6 08 = Ring AT Ø8 **Version V** U = Unidirectional B = Bidirectional



REV. 00 - 20/09/2019



Part. No.	ØC ØP	H
AT50061806UM AT50061806BM	6	30.9
AT50081808UM AT50081808BM	8	30.7

**Blocking valve
with manual override
and swivel pilot**

1/8"

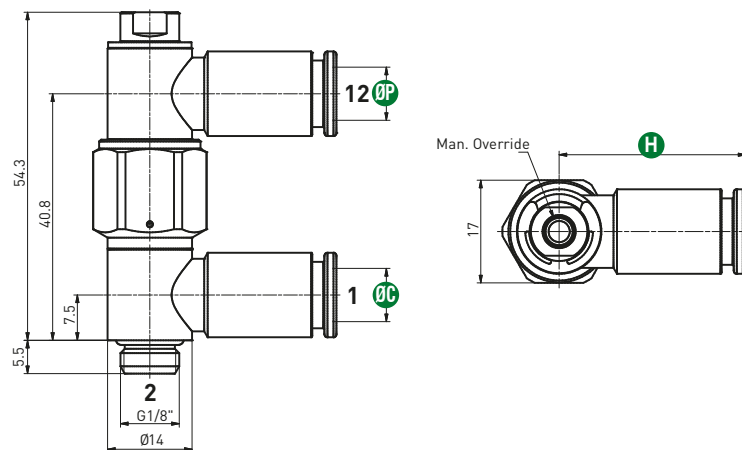

AT50C14V

Connection C 06 = Ring AT Ø6 08 = Ring AT Ø8 **Version V** U = Unidirectional B = Bidirectional



REV. 00 - 20/09/2019



Part. No.	ØC	H
AT500614U AT500614B	6	20
AT500814U AT500814B	8	30.9

Blocking valve

1/4"

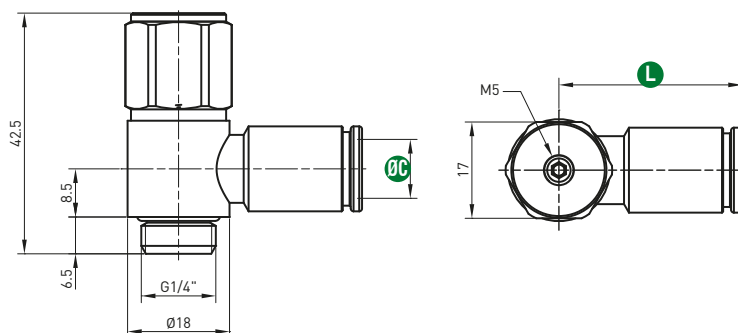

AT50C14PVM

Connection C 06 = Ring AT Ø6 08 = Ring AT Ø8

Pilot P 06 = Ring AT Ø6 08 = Ring AT Ø8 **Version V** U = Unidirectional B = Bidirectional



REV. 00 - 20/09/2019



Part. No.	ØP	H	ØC	H1
AT50061406UM AT50061406BM	6	30.9	6	32.1
AT50081408UM AT50081408BM	8	30.7	8	32.4

Blocking valve with manual override and swivel pilot

1/4"

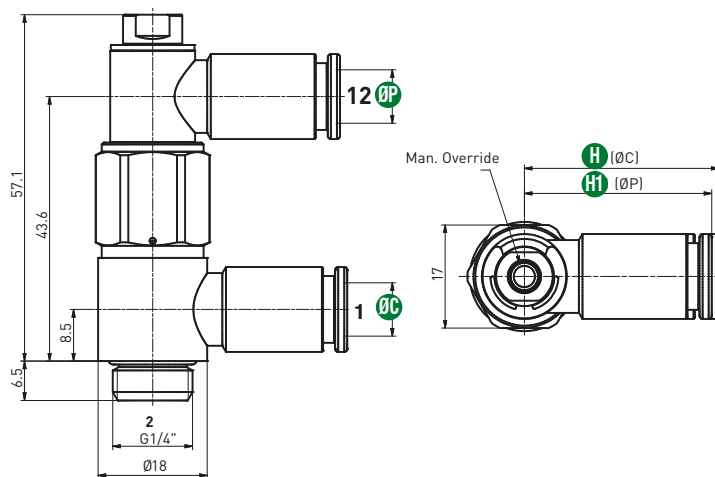

AT50C38V

Connection C 08 = Ring AT Ø8 10 = Ring AT Ø10 **Version V** U = Unidirectional B = Bidirectional





Part. No.	ØC	L
AT500838U AT500838B	8	34
AT501038U AT501038B	10	36

REV. 00 - 20/09/2019

Blocking valve

3/8"

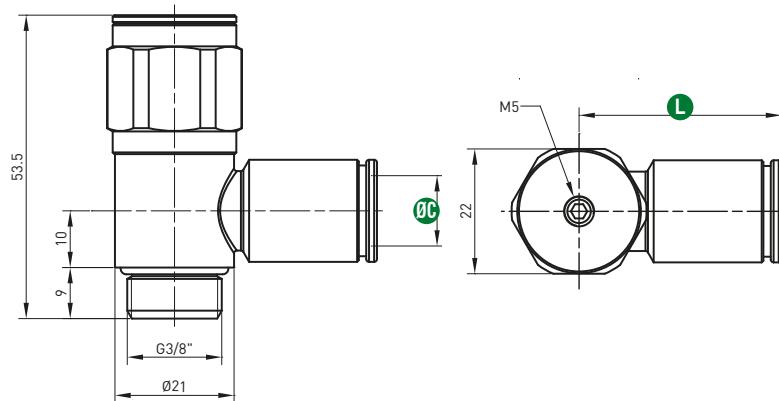

AT50C38PVM

Connection C 08 = Ring AT Ø8 10 = Ring AT Ø10

Pilot P 06 = Ring AT Ø6 08 = Ring AT Ø8 **Version V** U = Unidirectional B = Bidirectional





Part. No.	ØP	H	ØC	H1
AT50083806UM AT50083806BM	6	30.9	8	33.9
AT50103808UM AT50103808BM	8	30.7	10	35.7

REV. 00 - 20/09/2019

Blocking valve with manual override and swivel pilot

3/8"

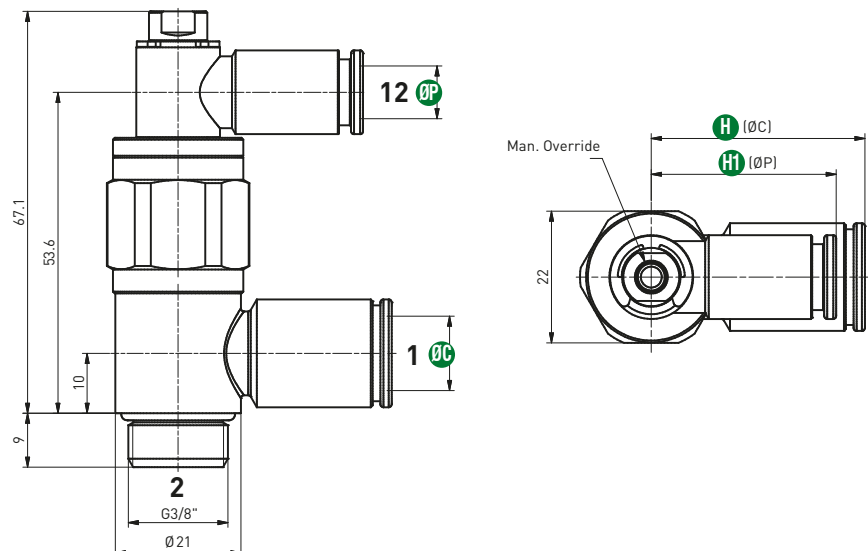


PNM0392




**Blocking valve
with manual, flow adjuster
and swivel pilot
for Ø8 tubes**

G1/8"



REV. 00 - 22/10/2018

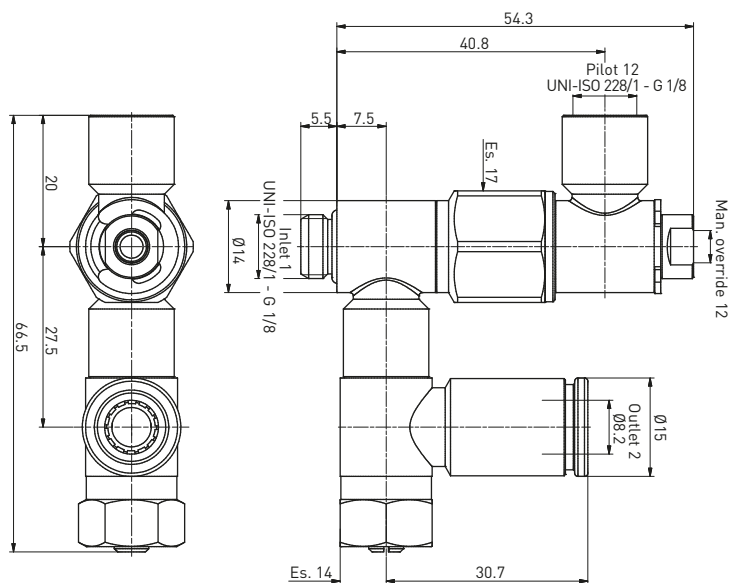


PNM0393




**Blocking valve
with manual, flow adjuster
and swivel pilot
for Ø8 tubes**

G1/4"



REV. 00 - 22/10/2018

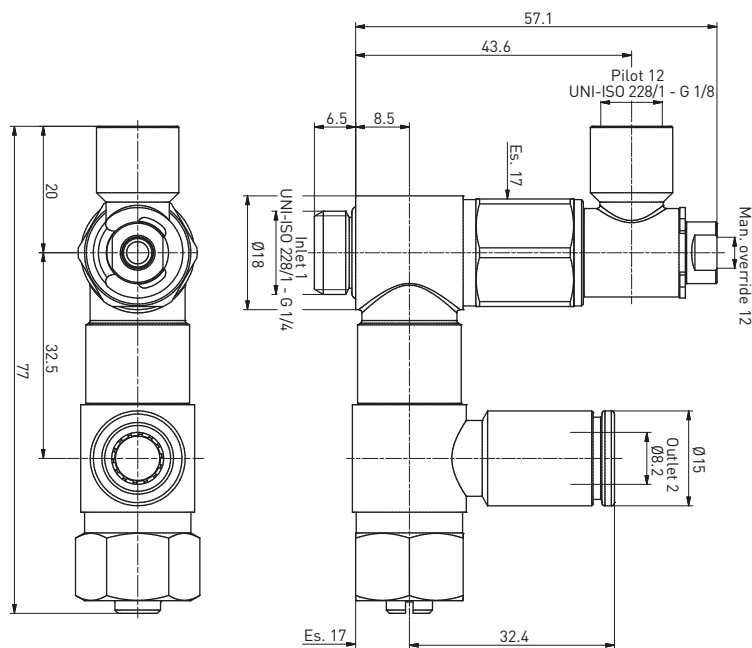



PNM0394

REV. 00 - 22/10/2018



**Blocking valve and flow
adjuster for Ø8 tubes**

G1/8"

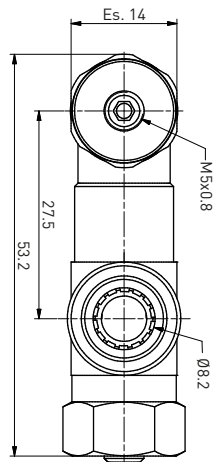



PNM0395

REV. 00 - 22/10/2018



**Blocking valve and flow
adjuster for Ø8 tubes**

G1/4"

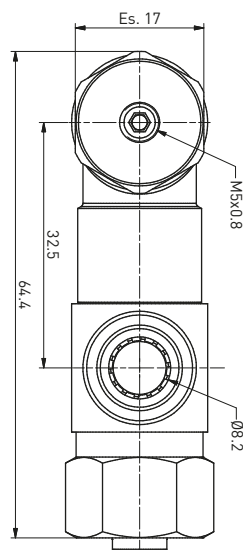

Accessories

Sensor

M12 or M8
connector;
PNP or NPN



Patented



EC001

Sensor cable



Auto-retaining device


for opening position An extremely light device which maintains the clamping arm in its defined opening position in case of air loss. The AR-series has been designed for **maximum load capacity** and due to its compact dimensions, it can be used on the same side of the manual operation handle.



Patented




Shims and spacers

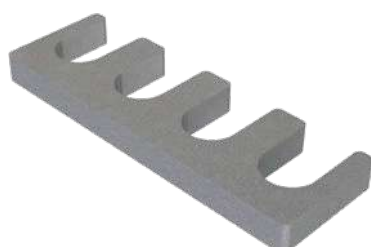

Sensor

ES001. Electronic sensor used for all clamps, all sizes and series



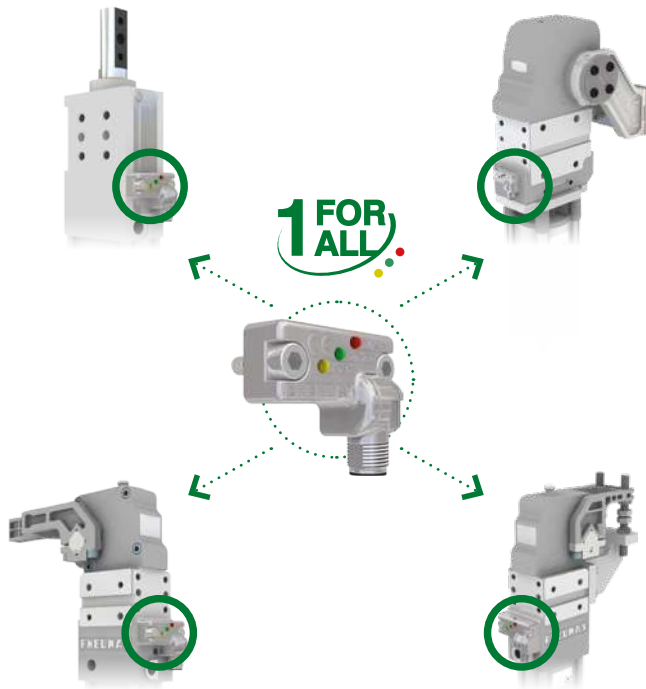


Technical features



Operating voltage	10-30 VDC
Voltage drop	≤ 2 V
Load current	≤ 100 mA
Current consumption	≤ 30 mA
Short-circuit protection	protected
Protection rating	IP68
Operating temperature	-0 °C +50 °C
Storage temperature	-25 °C +60 °C
Electromagnetic compatibility	EN IEC 60947-5-2
Weld field immunity	> 100 mT
Power supply indication	green LED
Open position indication	yellow LED
Closed position indication	red LED
Digital output type	PNP

ES001 / Electronic sensor with M12 swivel connector - PNP

REV. 00 - 31/03/2015


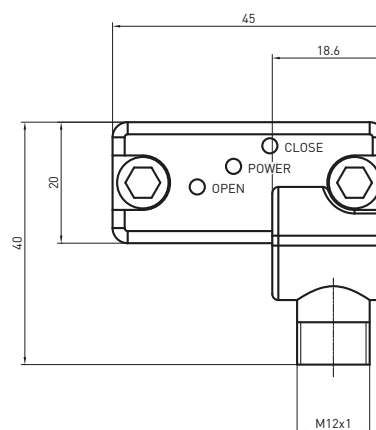
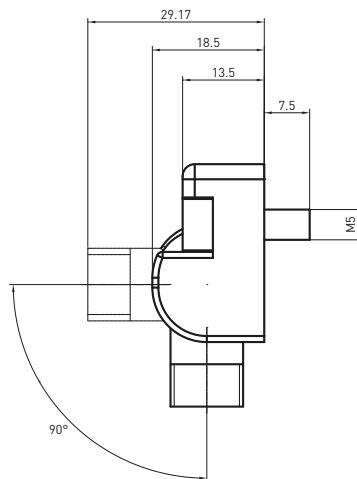


Simplified diagram (PNP)

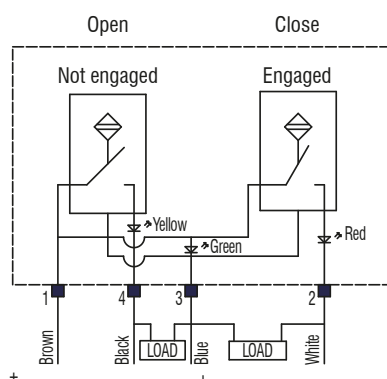


ES002 / Electronic sensor with M12 swivel connector - NPN


REV. 00 - 31/03/2015

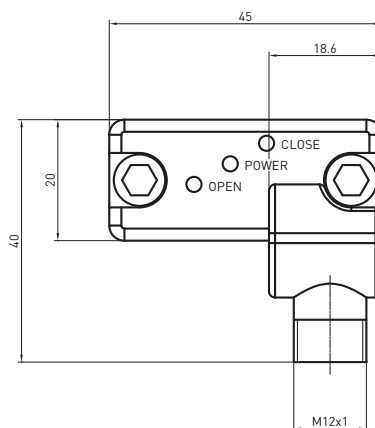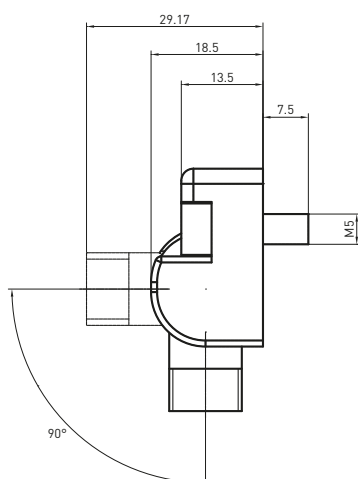

Simplified diagram (NPN)


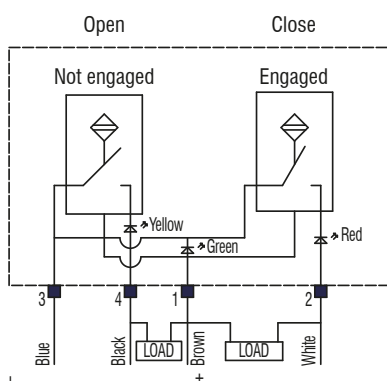


Brown + 1
Blue - 3 } SUPPLY




ES003 / Electronic sensor with M8 swivel connector - PNP


REV. 00 - 31/03/2015

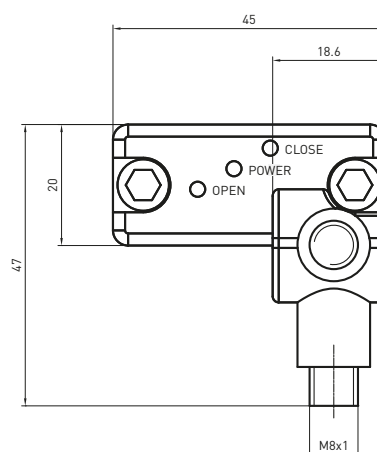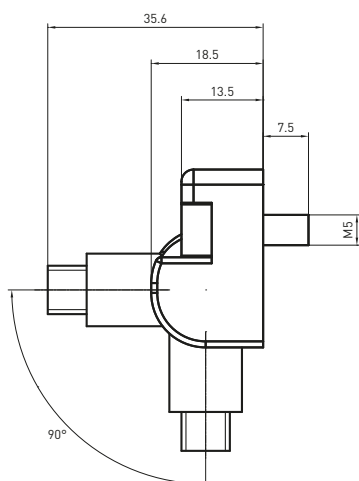



Simplified diagram (PNP)

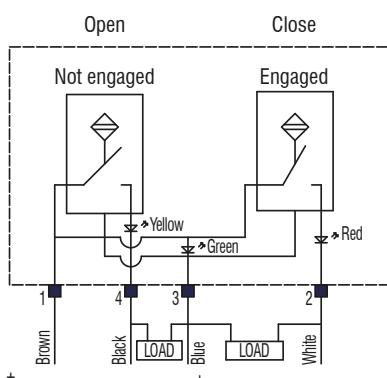

Brown + 1
Blue - 3 } SUPPLY





ES004 / Electronic sensor with M12 swivel connector - PNP

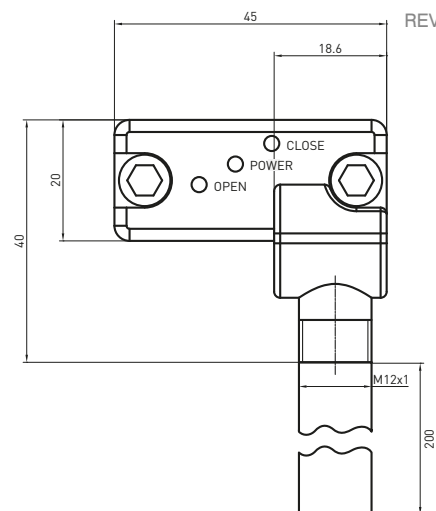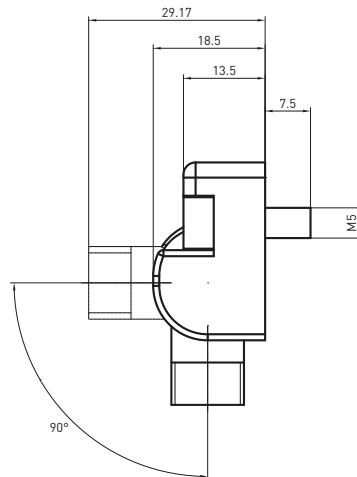

REV. 00 - 12/12/2016

Simplified diagram (PNP)


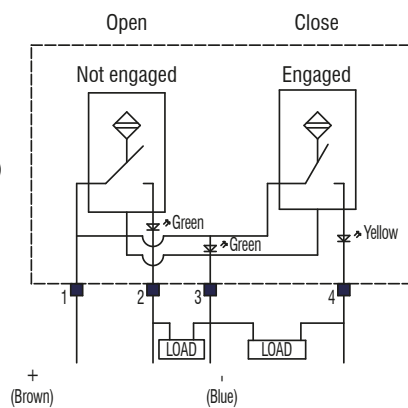


Technical features

Power supply indication	green LED
Open position indication	green LED
Closed position indication	yellow LED

Cable

EC001-05

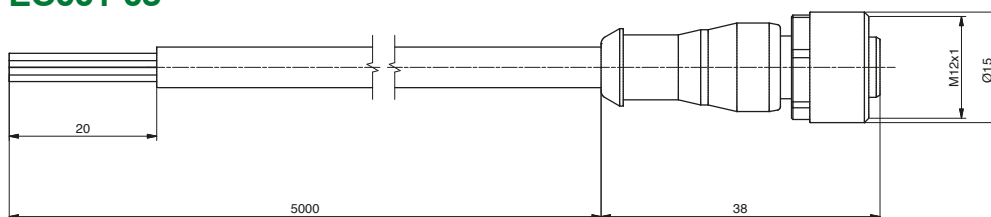

Technical features

Connector features

Product type	M12 circular connector with moulded cable
Connector type	Straight 180°
Contacts type	Female 4 poles
Pin	4
Protection class	IP67
Rated voltage	250V AC/DC
Rated current	4 A

Cable features

Pneumax cable code	EC001-05
Numbers of conductors	4
Conductors section	0,34 mm ² (AWG22)
Cable material	PUR UL style 21576
Coating colour	Black
Conductors insulation material	PP
Cable length	5000 mm
Stripping	20 mm Standard



High flex (class 6)

* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02
 DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1
 REV. 00 - 03/04/2015

AR-Series



Optional: auto-retaining device for opening position

An extremely light device which maintains the clamping arm in its defined opening position in case of air loss. The AR-series has been designed for **maximum load capacity** and due to its compact dimensions, it can be used on the same side of the manual operation handle. It locks the manual lever and guarantees the working position of the pin package with no air. It can easily be assembled on the right, as well as on the left side of the unit.



Patented





Ordering string

AR-Series

AR 12

AR 12	PRODUCT	AR = Auto-retaining device	
	SIZE	12	19N
		= Clamp's shaft 12 mm	= Clamp's shaft 19 mm NAAMS
		16 = Clamp's shaft 16 mm	22N = Clamp's shaft 22 mm NAAMS
		19 = Clamp's shaft 19 mm	30N = Clamp's shaft 30 mm NAAMS
		22 = Clamp's shaft 22 mm	09R = for RD250 pin packages
		30 = Clamp's shaft 30 mm	

AR12 / Clamp's shaft 12 mm

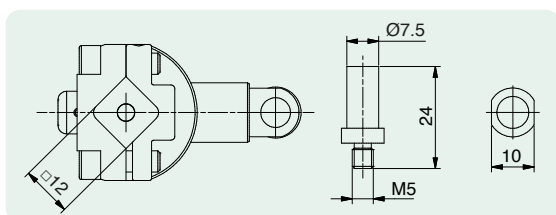
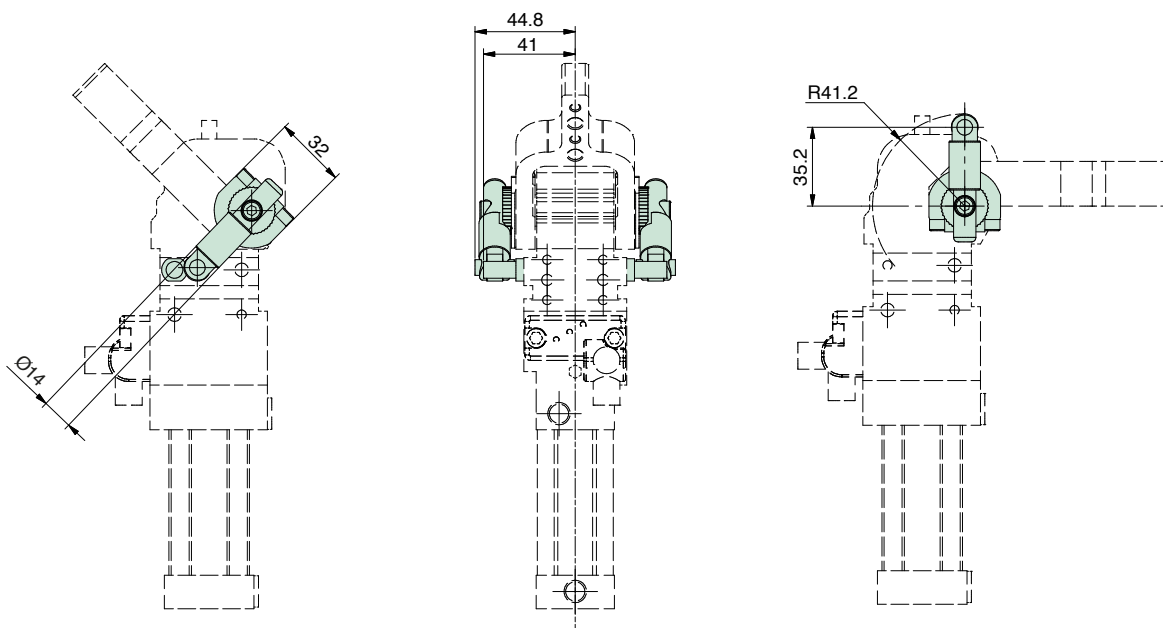


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 01 - 24/04/2024

AR16 / Clamp's shaft 16 mm

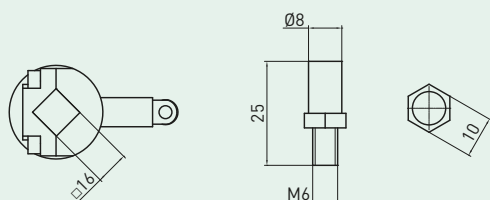
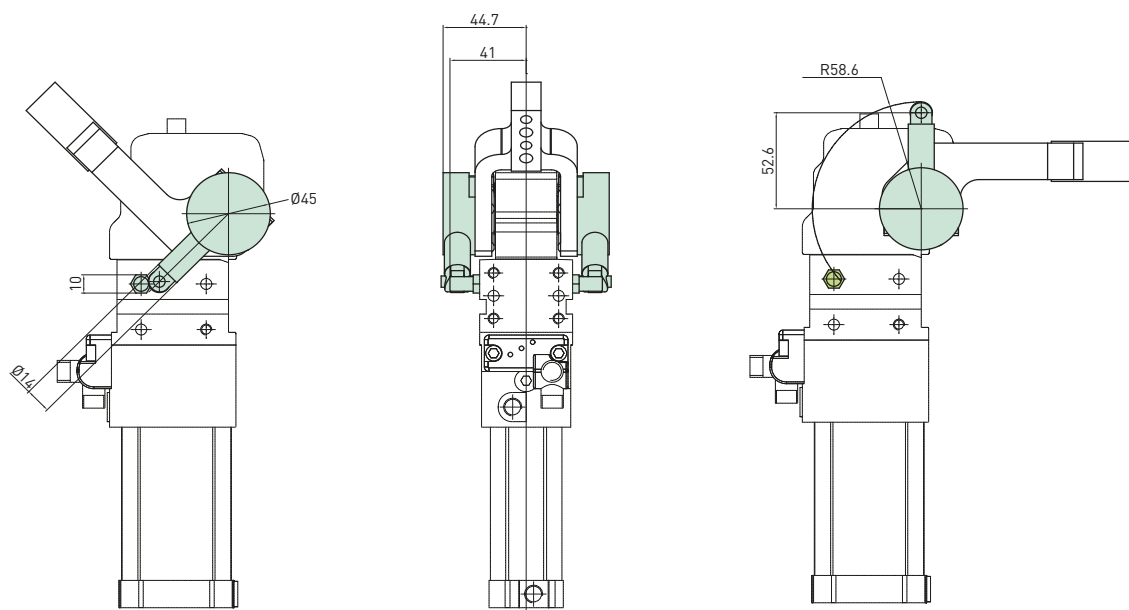


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 00 - 16/02/2016

AR19 / Clamp's shaft 19 mm

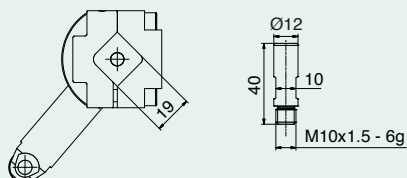
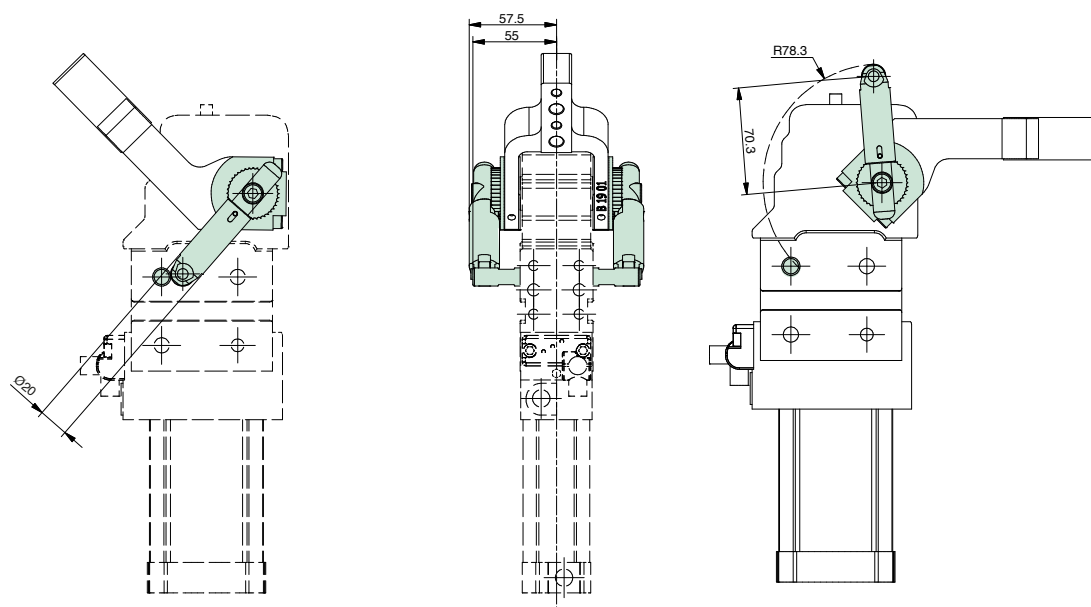


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 01 - 24/04/2024

AR22 / Clamp's shaft 22 mm

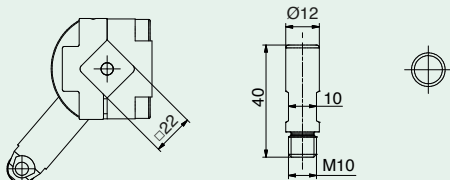
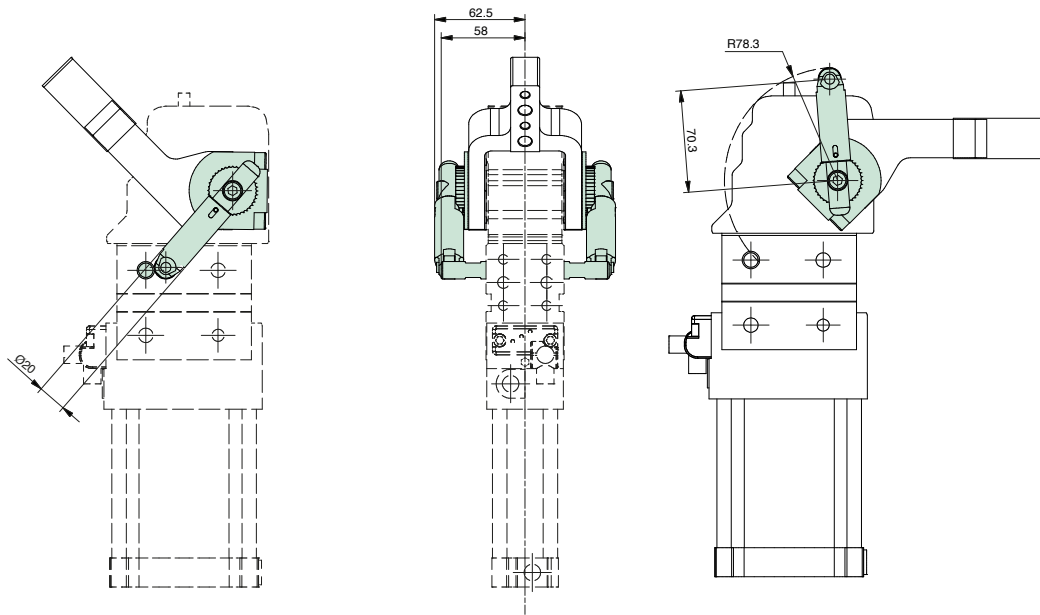


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 01 - 24/04/2024

AR30 / Clamp's shaft 30 mm


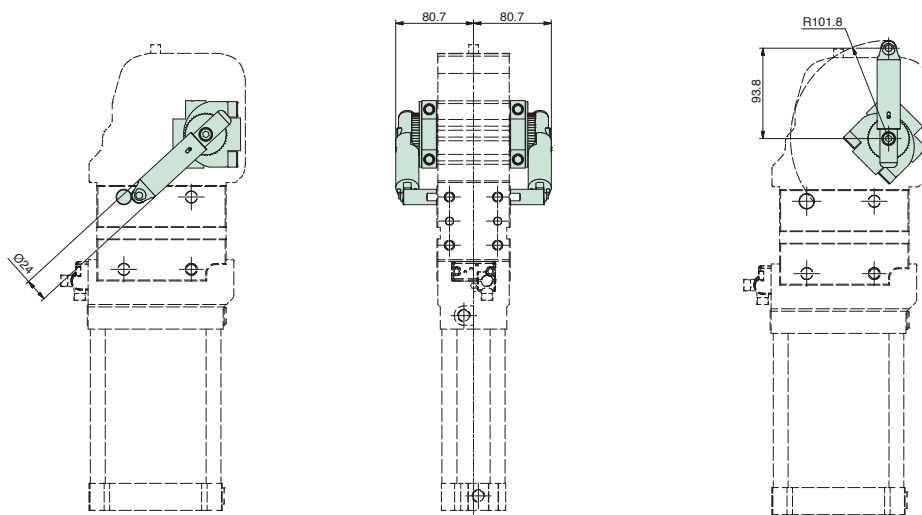


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 01 - 24/04/2024

AR19N / Clamp's shaft 19 mm - NAAMS std

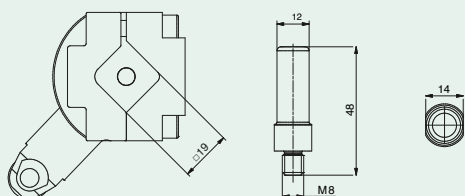
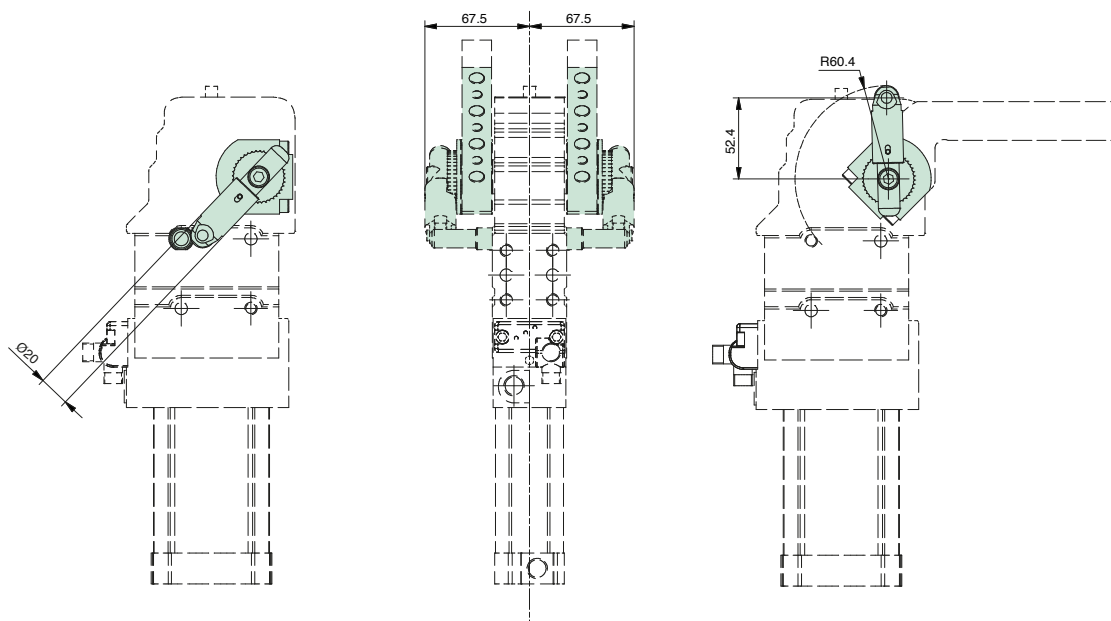


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 01 - 24/04/2024

AR22N / Clamp's shaft 22 mm - NAAMS std

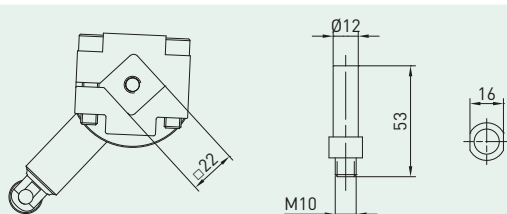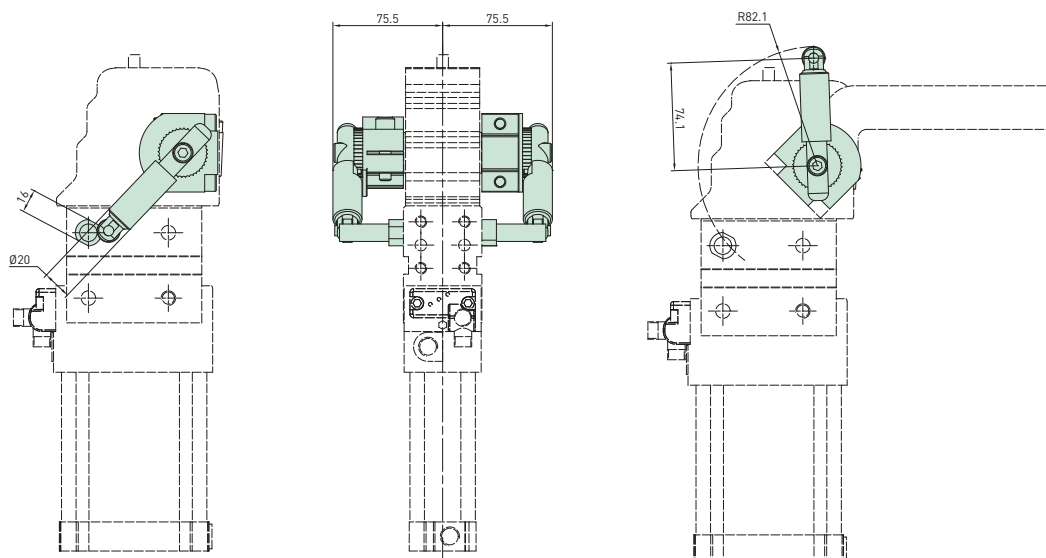


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 00 - 29/03/2019

AR30N / Clamp's shaft 30 mm - NAAMS Std

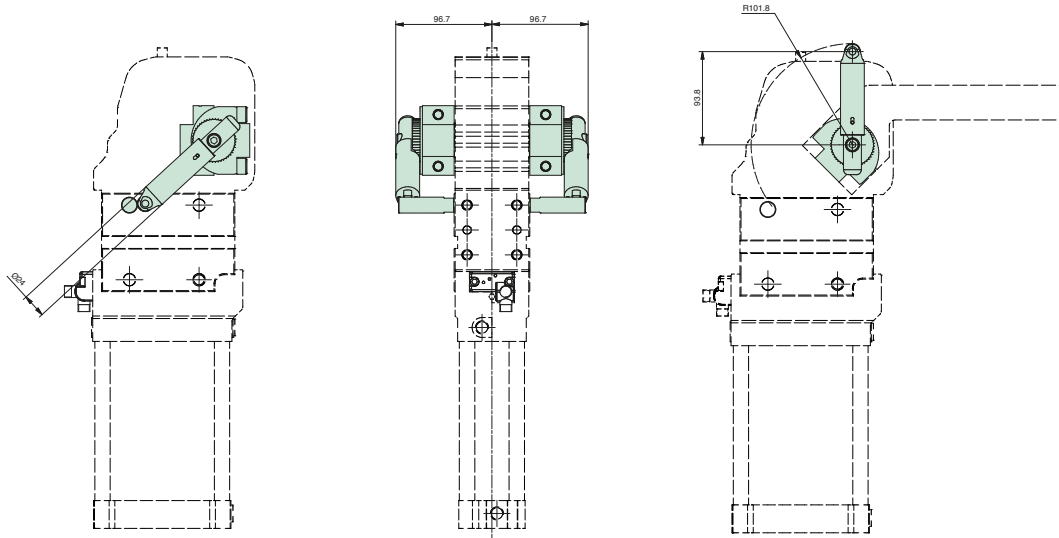


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 01 - 24/04/2024

AR09RD / Auto-retaining system for pin packages with manual operation


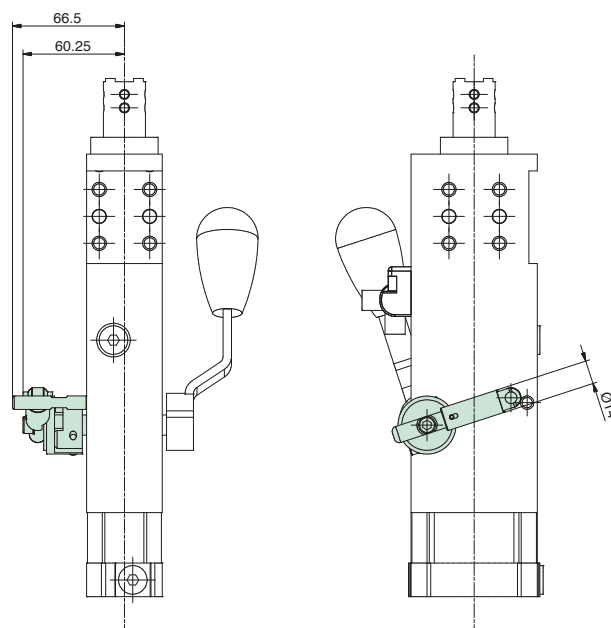


* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 01 - 24/04/2024

AR09F / Auto-retaining system for pin packages FTD50 with manual operation

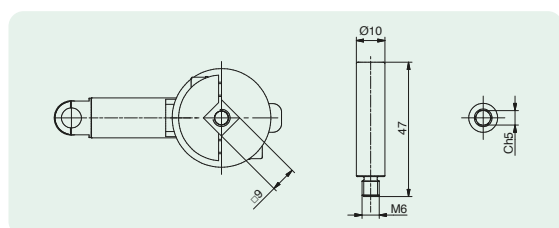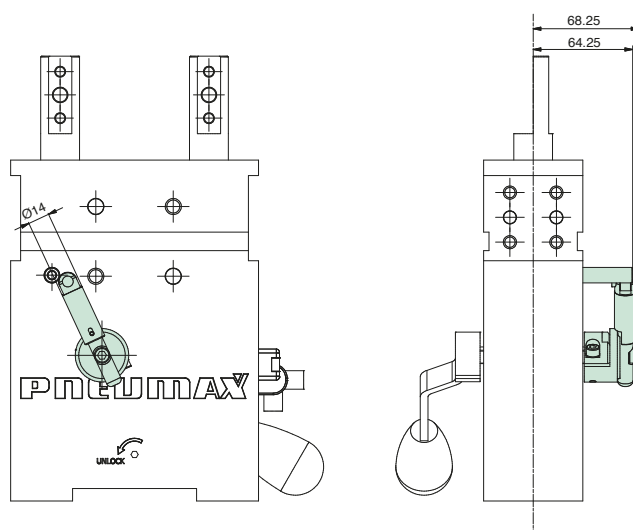

* DIMENSIONAL TOLERANCE
FOR DOWEL HOLES: ± 0.02

DIMENSIONAL TOLERANCE
FOR THREADED HOLES: ± 0.1

REV 01 - 24/04/2024

Auto-retaining device

Quick installation guide



Caution

Any maintenance operation may only be carried out by qualified and authorized personnel. For any reason, do not reach into the pivoting range of the clamping arms, when the clamps are in operation. Disconnect and lock out pneumatic and electric supply lines before operating on or around clamps.

A worksheet for the right sizing of the pin packages is available upon request. Visit our website for technical documents

<http://automotive.pneumax.it/>



Clamps in open position with auto-retain device


Clamp arm assembly



Position 1



Position 2



Position 3



Position 4

Please check the max opening angle related to the different arm position in our catalogue.

Auto-retaining device for opening position



Patented

An extremely light device which maintains the clamping arm in its defined opening position in case of air loss. The AR-series has been designed for **maximum load capacity** and due to its compact dimensions, it can be used on the same side of the manual operation handle.

With the clamping arm in the opening position

Clamp arm installation

Step 1

Remove the standard bracket.

Step 2

Replace the standard bracket with the specific bracket included AR kit, and tighten it.

Step 3



Adjust the retaining device according to the opening angle and make sure that the 2 dowel pins are symmetrically located.

Any disalignment of the dowel pins can jeopardize the correct functioning of the AR system.

Install the pin screw in the threaded hole of the side mount and tighten the retaining device with its screw.

Step 4

Set the interference between the holding device and the pin screw by slightly increasing or decreasing the opening angle adjustment, till the function is secured.



Shims and spacers

Ordering string



Shims

SH A 16 477 05

SH	PRODUCT	SH	= shims
A	MOUNTS	A	= for clamping arms
		M	= front, rear or side mounts of clamps or pin packages
16	SIZE	16	= for clamping arms with 16 mm shaft
		1922	= for clamping arms with 19 OR 22 mm shaft
		30	= for clamping arms with 30 mm shaft
		30x32	= mounting dimensions
477	HOLE PATTERN	477	= 4 holes, 2 Ø 7 screw holes and 2 Ø 7 dowel holes
		499	= 4 holes, 2 Ø 9 screw holes and 2 Ø 9 dowel holes
		399	= 3 holes, 2 Ø 9 screw holes and 1 Ø 9 dowel holes
05	THICKNESS	01	= 0.1 mm
		02	= 0.2 mm
		05	= 0.5 mm
		15	= 1.5 mm
		20	= 2 mm
		5	= 5 mm



Spacers


SP A 16 477 50

SP	PRODUCT	SP	= spacers
A	MOUNTS	A	= for clamping arms
		M	= front, rear or side mounts of clamps or pin packages
16	SIZE	16	= for clamping arms with 16 mm shaft
		1922	= for clamping arms with 19 OR 22 mm shaft
		30	= for clamping arms with 30 mm shaft
		30x32	= mounting dimensions
477	HOLE PATTERN	477	= 4 holes, 2 Ø 7 screw holes and 2 Ø 7 dowel holes
		499	= 4 holes, 2 Ø 9 screw holes and 2 Ø 9 dowel holes
		399	= 3 holes, 2 Ø 9 screw holes and 1 Ø 9 dowel holes
05	THICKNESS	50	= 5 mm

Shims

* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02 DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1

REV. 00 - 01/10/2015

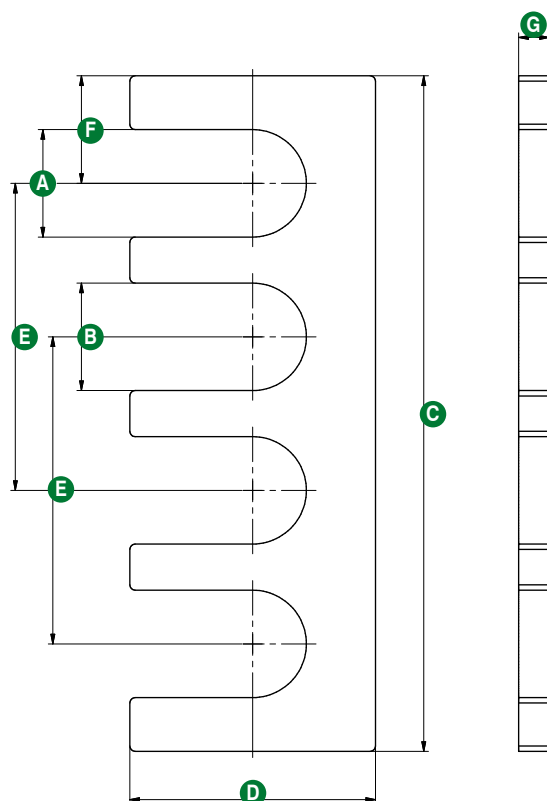


	A	B	C	D	E	F	G	TYPE
SHA1647701	7	7	44	16	20	7	0.1	4 SLOTS
SHA1647702	7	7	44	16	20	7	0.2	4 SLOTS
SHA1647705	7	7	44	16	20	7	0.5	4 SLOTS
SHA1647710	7	7	44	16	20	7	1	4 SLOTS
SHA1647720	7	7	44	16	20	7	2	4 SLOTS
SHA1647750	7	7	44	16	20	7	5	4 SLOTS
SHA192249901	9	9	60	20	30	7.5	0.1	4 SLOTS
SHA192249902	9	9	60	20	30	7.5	0.2	4 SLOTS
SHA192249905	9	9	60	20	30	7.5	0.5	4 SLOTS
SHA192249910	9	9	60	20	30	7.5	1	4 SLOTS
SHA192249920	9	9	60	20	30	7.5	2	4 SLOTS
SHA192249950	9	9	60	20	30	7.5	5	4 SLOTS
SHM30X3239901	9	9	50	50	32	9	5	3 SLOTS
SHM30X3239902	9	9	50	50	32	9	5	3 SLOTS
SHM30X3239905	9	9	50	50	32	9	5	3 SLOTS
SHM30X3239910	9	9	50	50	32	9	5	3 SLOTS
SHM30X3239920	9	9	50	50	32	9	5	3 SLOTS
SHM30X3239950	9	9	50	50	32	9	5	3 SLOTS
SPA1647750	7	7	44	16	20	7	5	4 HOLES
SPA192249950	9	9	60	20	30	7.5	5	4 HOLES
SPA3047750	9	9	60	25	30	7.5	5	4 HOLES
SPM192239950	9	9	50	50	32	9	5	6 HOLES

Spacers

* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02 DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1

REV. 00 - 01/10/2015



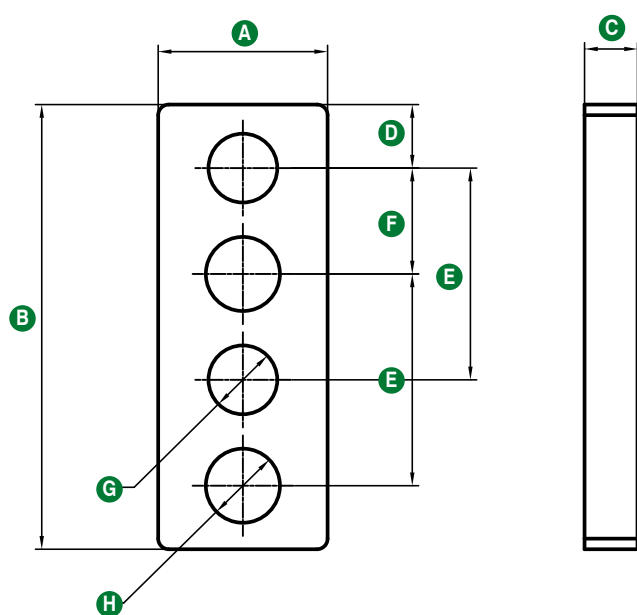


	A	B	C	D	E	F	G	H
SPA1647650	16	42	5	6	20	10	6.5	7
SPA192247650	20	60	5	7.5	30	15	9	9
SPA3047650	25	60	5	7.5	30	15	9	9

ATEX Directive




Clamping

ATEX READY  SERIES C1				
	part no. C1_25/80			
	Marking	Temperature	Size	Mounting Pattern
	II 2G Ex h IIC T6 Gb X II 2D Ex h IIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø25 - Ø80mm	International mount
ATEX READY  SERIES C2				
	part no. C2_50/80			
	Marking	Temperature	Size	Mounting Pattern
	II 2G Ex h IIC T6 Gb X II 2D Ex h IIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø50 - Ø80mm	NAAMS Standard
ATEX READY  SERIES HE1				
	part no. HE1P0/1/2/3/4			
	Marking	Temperature	Size	Mounting Pattern
	II 2G Ex h IIC T6 Gb X II 2D Ex h IIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø40 - Ø80mm	International mount
ATEX READY  SERIES HE2				
	part no. HE2P1/2/3			
	Marking	Temperature	Size	Mounting Pattern
	II 2G Ex h IIC T6 Gb X II 2D Ex h IIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø50 - Ø80mm	NAAMS Standard

ATEX READY



SERIES CX

part no. **C_X40/50/63**

Marking	Temperature	Size	Mounting Pattern
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø40 - Ø63mm	International mount / NAAMS Standard

ATEX READY



SERIES CS/HES

part no. **CS/HES**

Marking	Temperature	Size	Mounting Pattern
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø40 - Ø80mm	International mount / NAAMS Standard

ATEX READY



SERIES CB

part no. **CB40/63**

Marking	Temperature	Size	Mounting Pattern
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø40; Ø63mm	International mount

ATEX READY



SERIES AR

part no. **AR_/AR_N/AR09R**

Marking	Temperature	Size	Mounting Pattern
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	12mm; 16mm; 19mm; 22mm; 30mm	International mount / NAAMS Standard

Locating

ATEX READY


SERIES R

 part no. **R_32**

Marking	Temperature	Size	Stroke
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø32mm	20mm; 40mm

 part no. **R_50/63**

Marking	Temperature	Size	Stroke
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø50; Ø63mm	15mm; 25mm; 40mm; 50mm; 60mm

ATEX READY


SERIES RT

 part no. **RT_40**

Marking	Temperature	Size	Stroke
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø40 mm	40 mm

ATEX READY


SERIES RC

 part no. **RC_D50/63**

Marking	Temperature	Size	Stroke
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø50; Ø63mm	25mm; 50mm

ATEX READY


SERIES HP

 part no. **HP50**

Marking	Temperature	Size	Stroke
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø50mm	15mm; 25mm; 40mm; 50mm; 60mm

ATEX READY


SERIES F

 part no. **F_40/41/63**

Marking	Temperature	Size	Stroke
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø40 mm, Ø41 mm, Ø63mm	15mm; 25mm; 40mm; 50mm; 60mm

ATEX READY


SERIES FT

 part no. **FT_50**

Marking	Temperature	Size	Stroke
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø50 mm	40mm

Handling

ATEX READY

**SERIES J**part no. **J_40**

Marking	Temperature	Size	Arm
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø40 mm	Aluminum / Steel

Pivoting

ATEX READY

**SERIES P**part no. **P63**

Marking	Temperature	Size	Opening Angle
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø63 mm	0°-135°

cod. **P80/100/125**

Marking	Temperature	Size	Opening Angle
II 2G Ex h IIC T6 Gb X II 2D Ex h IIIC T85°C Db X	0°C ≤ Ta ≤ +50°C (T6/T85°C)	Ø80, Ø100 mm, Ø125 mm	45°; 60°; 90°; 120°; 135°

Components for the automotive industry

Pneumax is a **one-source supplier** for the Automotive Industry with a comprehensive line of:

- **Pneumatic drives**
- **Valves**
- **Valve terminals**
- **Communication control blocks**
- **Compressed air preparation**
- **Grippers**
- **Exhaustive range of clamping, locating, handling and pivoting devices for BIW.**

ECOMPACT

Compact cylinders



SHORT STROKE

Compact cylinders



ECOLIGHT ISO 15552

Standard-based
light cylinders



ISO 6432

Standard-Based
microcylinders



ECOFLAT

Flat cylinders



RODLESS

Cylinders



GUIDED

Compact cylinders



GUIDED COMPACT CYLINDERS

Metal Rod Scrapers



Serial connections with:

- **CAN**^{open}
- Ether**CAT**[®]
- **DeviceNet**[™]
- **IO-Link**
- **PROFI**[®]
BUS
- **PROFI**[®]
NET
- **EtherNet/IP**[™]

ROTARY ACTUATORS

Cylinders



AIRPLUS

Modular Air Service Units



OPTYMA

Valve Manifold series



PARALLEL GRIPPERS

Compact cylinders



Radial grippers
(180°)



Three-points
grippers



Angle
grippers



Mini slides

CABINETS AND SYSTEMS



ISO 15407

Valve Manifold series



SERIE 1700

Proportional regulators



SPECIAL SOLUTION

Cooling water intake cylinder





Scan the QR code and discover our sales network

PNEUMAX S.P.A. Headquarters

Via Cascina Barbellina, 10
24050 Lurano (BG) - Italia
Tel. 035/4192777
Fax 035/4192740 - 035/4192741
info@pneumaxspa.com
www.pneumaxspa.com

ITALY SALES NETWORK



GLOBAL SALES NETWORK





PNEUMAX

PNEUMAX S.p.A.

Via Cascina Barbellina, 10
24050 Lurano (BG) - Italy
P. +39 035 41 92 777
automotive@pneumaxspa.com
www.pneumaxspa.com